


DIGITUS Cat.7 S/FTP installation cable, 250 m, simplex, Dca-s1a d1 a1

DK-1743-VH-250
EAN 4016032480792

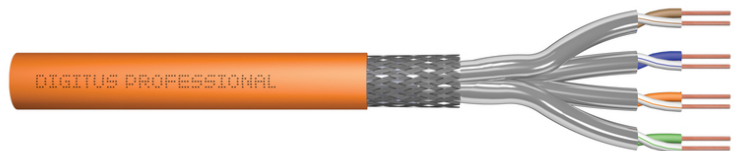

CAT 7 S-FTP Installationskabel, 1200 MHz Dca (EN 50575), AWG 23/1, 250 m box, SX, orange

Adequado para a construção de cablagem estruturada na área secundária e terciária.

Melhor desempenho e melhor qualidade de ligação com a rede.


- Número total de condutores isolados: 8, entrançados em 4 pares
- Código de cor: azul-branco, laranja-branco, verde-branco, castanho-branco


- Blindagem dos pares individuais: folha em poliéster oculta em alumínio, cobre 100%
- Assortment: Twisted Pair Installation Cables
- Category: CAT 7
- Shielding: S-FTP, pairs in metal foil and braid shielding
- CPR: Dca
- Length: 250 m
- Color: orange
- Jacket: LSOH
- Structure: 4 x 2 AWG 23/1, solid twisted pair

Logistics

	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm ³
Packaging Unit Carton	1	15.19	40.00	40.00	30.00	48,000.00
Packaging Unit Inside	1	15.19	40.00	40.00	30.00	48,000.00
Packaging Unit Single	1	15.19	40.00	40.00	30.00	48,000.00
Net single without Packaging	1	13.98	20.00	38.00	27.20	0.00

More images:

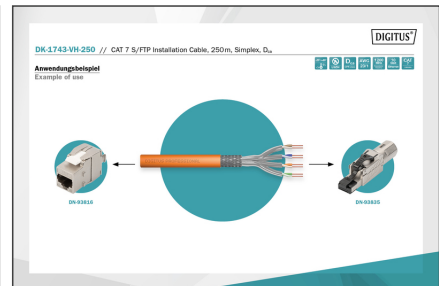

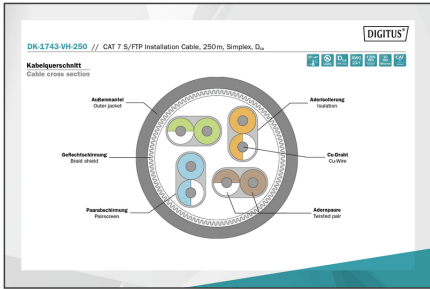

Produktinformation Product Information

Produktname Product Name	DK.1743-VH-250	Hersteller Manufacturer	DIGITUS
Artikelnummer Article No.	DK.1743-VH-250	Barcode	4051701000000

Physikalische Eigenschaften Physical Properties

Leitungsart Cable Type	Simplex	Leitungsstruktur Cable Structure	4x 25 twisted pairs
Leitungsart Cable Type	Simplex	Leitungsstruktur Cable Structure	4x 25 twisted pairs

Elektrische Eigenschaften Electrical Properties


Leitungsart Cable Type	Simplex	Leitungsstruktur Cable Structure	4x 25 twisted pairs
------------------------	---------	----------------------------------	---------------------

Mechanische Eigenschaften Mechanical Properties

Leitungsart Cable Type	Simplex	Leitungsstruktur Cable Structure	4x 25 twisted pairs
------------------------	---------	----------------------------------	---------------------

Leistungsmerkmale Transmission Properties

Parameter	AST	MEET	ANSI	PA-ANSI	IS	IS/EXT	PA/EXT
1	3	76	76	76	76	76	76
10	11.0	76	76	76	76	76	76
100	10.1	76	76	76	76	76	76
1000	10.1	76	76	76	76	76	76
10000	10.1	76	76	76	76	76	76

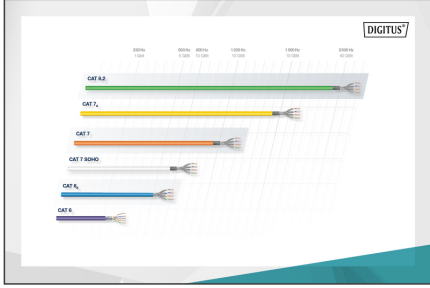

DIGITUS

Off-Exchange Performance

2+ 1+ 3

Performance Classifications

Labels: B2ca, Cca, Dca, Eca, s1a, d1, a1.

