


DIGITUS Cat.7 S/FTP installation cable, 250 m, simplex, Dca-s1a d1 a1

DK-1743-VH-250
EAN 4016032480792

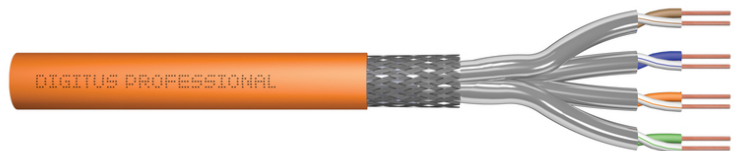

CAT 7 S-FTP installation cable, 1200 MHz Dca (EN 50575), AWG 23/1, 250 m box, SX, orange

Adequado para a construção de cablagem estruturada na área secundária e terciária.


Melhor desempenho e melhor qualidade de ligação com a rede.


- Número total de condutores isolados: 8, entrançados em 4 pares
- Código de cor: azul-branco, laranja-branco, verde-branco, castanho-branco

- Blindagem dos pares individuais: folha em poliéster oculta em alumínio, cobre 100%
- Assortment: Twisted Pair Installation Cables
- Category: CAT 7
- Shielding: S-FTP, pairs in metal foil and braid shielding
- CPR: Dca
- Length: 250 m
- Color: orange
- Jacket: LSOH
- Structure: 4 x 2 AWG 23/1, solid twisted pair

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm ³
Packaging Unit Carton	1	15.19	40.00	40.00	30.00	48,000.00
Packaging Unit Inside	1	15.19	40.00	40.00	30.00	48,000.00
Packaging Unit Single	1	15.19	40.00	40.00	30.00	48,000.00
Net single without Packaging	1	13.98	20.00	38.00	27.20	0.00

More images:

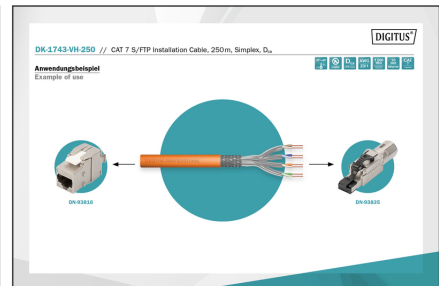

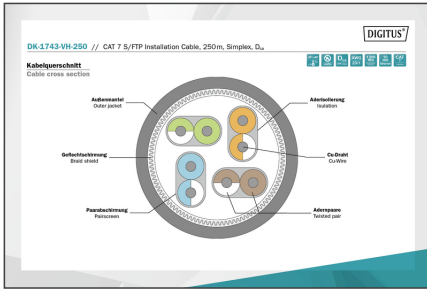

Produktions- und Produktinformationen

Produktname	DK.1743-VH-250 // CAT 7 S/FTP Installation Cable, 250m, Simplex, D _c	Hersteller	ASSMANN Electronic GmbH
Teilenummer	DK.1743-VH-250 // CAT 7 S/FTP Installation Cable, 250m, Simplex, D _c	Produkttyp	Kabel
Material	PVC, 2x 250m, 250m, 250m, 250m, 250m, 250m, 250m, 250m	Materialgruppe	Kabel
Materialbeschreibung	PVC, 2x 250m, 250m, 250m, 250m, 250m, 250m, 250m, 250m	Materialgruppe	Kabel
Materialbeschreibung	PVC, 2x 250m, 250m, 250m, 250m, 250m, 250m, 250m, 250m	Materialgruppe	Kabel
Materialbeschreibung	PVC, 2x 250m, 250m, 250m, 250m, 250m, 250m, 250m, 250m	Materialgruppe	Kabel
Materialbeschreibung	PVC, 2x 250m, 250m, 250m, 250m, 250m, 250m, 250m, 250m	Materialgruppe	Kabel
Materialbeschreibung	PVC, 2x 250m, 250m, 250m, 250m, 250m, 250m, 250m, 250m	Materialgruppe	Kabel

Elektrische Eigenschaften Electrical Properties


Parameter	Value	Parameter	Value
Impedance	100 Ohm	Attenuation	1.5 dB/100m
Return Loss	> 15 dB	Propagation Delay	5 ns/m
Shielding Effectiveness	> 90 dB	Shielding Effectiveness	> 90 dB

Mechanische Eigenschaften Mechanical Properties

Parameter	Value	Parameter	Value
Conductor Material	Copper	Conductor Diameter	0.2 mm
Insulation Material	PVC	Insulation Thickness	0.1 mm
Operating Temperature	-20°C to +85°C	Storage Temperature	-40°C to +125°C

Leistungsmerkmale Transmission Properties

Category	dB	dB	dB	dB	dB	dB	dB	dB
1	1	2	3	4	5	6	7	8
2	10	11	12	13	14	15	16	17
3	20	21	22	23	24	25	26	27
4	30	31	32	33	34	35	36	37
5	40	41	42	43	44	45	46	47
6	50	51	52	53	54	55	56	57
7	60	61	62	63	64	65	66	67
8	70	71	72	73	74	75	76	77
9	80	81	82	83	84	85	86	87
10	90	91	92	93	94	95	96	97

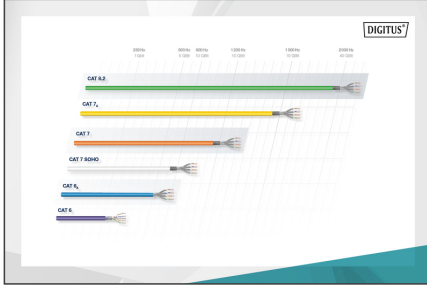

Produktions- und Produktinformationen


Produktname	DK.1743-VH-250 // CAT 7 S/FTP Installation Cable, 250m, Simplex, D _c	Hersteller	ASSMANN Electronic GmbH
Teilenummer	DK.1743-VH-250 // CAT 7 S/FTP Installation Cable, 250m, Simplex, D _c	Produkttyp	Kabel
Material	PVC, 2x 250m, 250m, 250m, 250m, 250m, 250m, 250m, 250m	Materialgruppe	Kabel
Materialbeschreibung	PVC, 2x 250m, 250m, 250m, 250m, 250m, 250m, 250m, 250m	Materialgruppe	Kabel
Materialbeschreibung	PVC, 2x 250m, 250m, 250m, 250m, 250m, 250m, 250m, 250m	Materialgruppe	Kabel
Materialbeschreibung	PVC, 2x 250m, 250m, 250m, 250m, 250m, 250m, 250m, 250m	Materialgruppe	Kabel
Materialbeschreibung	PVC, 2x 250m, 250m, 250m, 250m, 250m, 250m, 250m, 250m	Materialgruppe	Kabel
Materialbeschreibung	PVC, 2x 250m, 250m, 250m, 250m, 250m, 250m, 250m, 250m	Materialgruppe	Kabel

Elektrische Eigenschaften Electrical Properties

Parameter	Value	Parameter	Value
Impedance	100 Ohm	Attenuation	1.5 dB/100m
Return Loss	> 15 dB	Propagation Delay	5 ns/m
Shielding Effectiveness	> 90 dB	Shielding Effectiveness	> 90 dB

Mechanische Eigenschaften Mechanical Properties

Parameter	Value	Parameter	Value
Conductor Material	Copper	Conductor Diameter	0.2 mm
Insulation Material	PVC	Insulation Thickness	0.1 mm
Operating Temperature	-20°C to +85°C	Storage Temperature	-40°C to +125°C

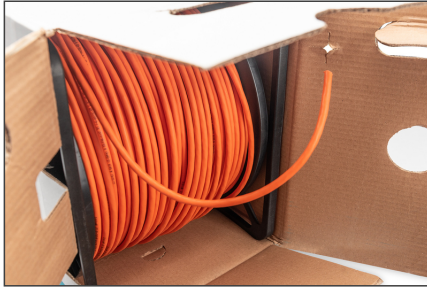

Safety notes

- Data cables must not be bent, stretched or twisted excessively. Sharp bends can damage the cable sheath and lead to failures or short circuits.
- Installation only by trained specialists.
- Installation only in dry rooms.
- The data cable must not be in direct contact with other electrical cables or high-voltage sources in order to avoid electromagnetic interference.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
 Auf dem Schüffel 3
 Lüdenscheid, Germany
<https://www.assmann.com>
 info@assmann.com