

DIGITUS Audio adapter cable, 3.5 mm stereo jack to RCA

DB-510330-010-S
EAN 4016032481331



Stereo 3.5mm to 2RCA Splitter Y, M to M Aluminum Housing ,Gold plated,NYLON Jacket, 1m

3.5 mm jack connection cable for connecting e.g. MP3 players or smartphones using the RCA inputs of your stereo system.

The Stereo Audio Adapter Cable from DIGITUS enables the easy connection of devices with a 3.5 mm jack output to a stereo system - or another devices with two Cinch/RCA inputs

- Compatible with all devices with 2 RCA connections/3.5 mm jack connection
- Gold-plated contacts: For the best signal transmission



- Aluminum housing and nylon mesh for long-term use
- Y audio cable to connect smartphones/notebooks and other devices to HiFi systems/speakers



Attributes

- Color cable: black
- Connector 1: 3.5mm stereo plug
- Connector 2: 2x RCA plug
- Connector surface: gold-plated
- Length: 1 m

| Logistics | | | | | | |
|------------------------------|--------------|-------------|------------|------------|-------------|-----------------|
| | Number (pcs) | Weight (kg) | Depth (cm) | Width (cm) | Height (cm) | cm ³ |
| Packaging Unit Carton | 120 | 6.00 | 34.00 | 43.00 | 41.00 | 59,942.00 |
| Packaging Unit Inside | 1 | 0.05 | 0.00 | 0.00 | 0.00 | 0.00 |
| Packaging Unit Single | 1 | 0.05 | 11.00 | 11.00 | 4.00 | 484.00 |
| Net single without Packaging | 1 | 0.03 | 10.00 | 10.00 | 3.00 | 0.00 |

More images:

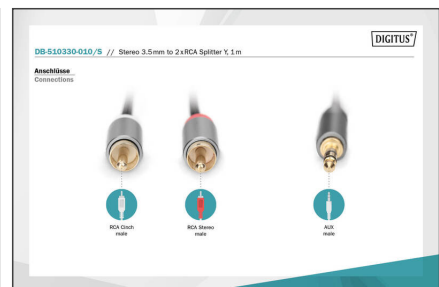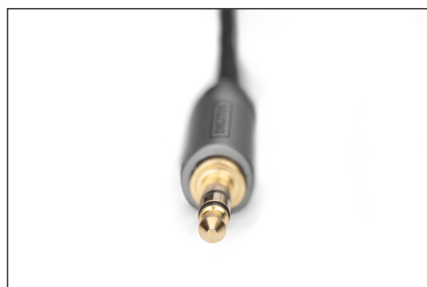

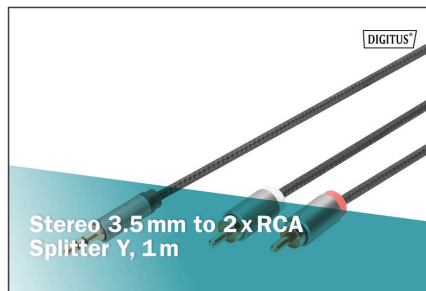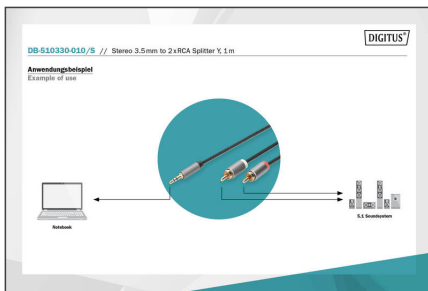

Safety notes

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
 Auf dem Schüffel 3
 Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com