

DIGITUS Voertuig - laadkabel, 5m, type 2 naar type 2

DK-3P32-050
EAN 4016032481454



Voertuig - drie fasen, 415V, 32A, 5 m Type 2 naar type 2 laadkabel standaard

Met de DK-3P32-050 voertuig-laadkabel kunt u probleemloos elk voertuig met type 2 stekker aansluiten aan openbare laadstations of een wallbox met laadaansluiting. Laadkabels van type 2 zijn gecertificeerd volgens EN 62196-1:2014, EN 62196-2:2017 en beschermingsklasse IP55.

Type 2 naar type 2 laadkabel, IP55 beschermd, 3-fasig, tot 32 A.

- Type: Standaard kabel
- Kabellengte: 5 m
- Bruikbare lengte: 5 m
- Type oplaadkabel: 5 x 6 mm² + 1 x 0,75 mm²




- Kleur: Zwart
- Jas: TPU
- Stekker: EN 62196-2 Type 2
- Nominale spanning: 400 V
- Nominaal vermogen: 22 kW
- Nominale stroom: 32 A
- Aansluitfasen: 3
- Bedrijfstemperatuur: -30~+50
- Beschermingsklasse: IP55 (beschermd tegen waterstralen)

Package contents

- 5m Voertuig-aansluitkabel type 2
- Snelstartgids

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm ³
Packaging Unit Carton	5	19.30	63.00	38.00	38.00	90,972.00
Packaging Unit Inside	1	3.86	0.00	0.00	0.00	0.00
Packaging Unit Single	1	3.86	35.00	35.00	15.00	18,375.00
Net single without Packaging	1	3.18	0.00	0.00	0.00	0.00

More images:

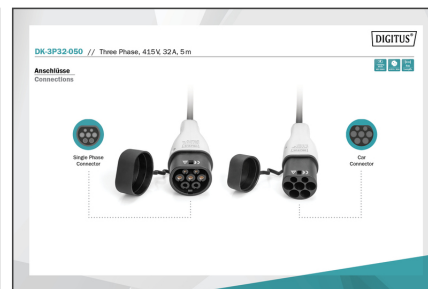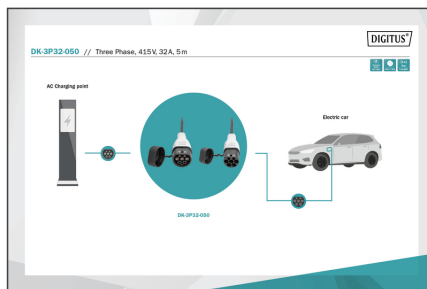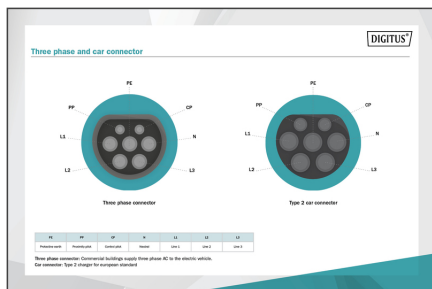



DIGITUS	
22 kW Max. Output Power	32 A Max. Output Current
THREE Phase-Connection	5 m Cable Length

DK-3P32-050
EV Charging Cable, 5 m, Type 2 to Type 2

