

DIGITUS USB Type C to DisplayPort Bi-directional Adapter Cable

DB-300334-010-S
EAN 4016032484264



8K@30Hz. USB Type C to DP, adapter cable HBR3, Aluminum Housing, Black 1m

The DIGITUS® USB Type C <=> DisplayPort bidirectional adapter cable supports the transfer from a USB Type C source to a DisplayPort interface. Likewise, it supports the transfer from a DisplayPort source to a USB Type-C interface. For example, you can connect your laptop (USB Type-C equipped) to your monitor, TV or projector (DisplayPort interface) or you can connect your PC (DisplayPort output) to a monitor (USB Type-C interface). Power is supplied via the USB port, so no external power source is necessary.

The DIGITUS® USB Type-C to DisplayPort Adapter Cable supports transmission from USB Type-C sources to DP-capable displays.

- Supports: Resolutions of up to 8K (7680x4320) with a display refresh rate of up to 30Hz.
- Supports: Resolutions up to 4K at 144Hz
- Supports: Resolutions up to 2K at 165Hz
- Data transmission speed: 25.92 Gbit/s
- Supports the transfer of audio and video signals
- Aluminum housing
- Ferrite filter: none
- USB-C products: yes


- Strands made of copper, foil and mesh shielding for robustness and a reliable connection
- DisplayPort standard: DP 1.4
- Supports: Multi-Stream Transport (MST)
- Manufacturer's notice:
- If you connect a USB-C monitor/TV/projector to a PC equipped with DP, make sure that your USB-C display supports DisplayPort signal output.
- The video output capabilities depend on your notebook's graphic card and the connected monitor. Some screens also limit the available resolution.
- AOC - Active Optic Cable: no
- AWG: 34
- Color cable: black
- Connector 1: USB C, plug
- Connector 2: DP, plug
- Ferrite filter: none
- USB compliance: USB Type-C™
- Length: 1 m
- Shielding: triple shielding

Package contents

- 1x USB Type-C Adapter Cable, USB Type-C to DP, 1 m

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	120	7.60	49.00	52.00	25.00	63,700.00
Packaging Unit Inside	1	0.06	0.00	0.00	0.00	0.00
Packaging Unit Single	1	0.06	2.30	7.50	23.50	405.38
Net single without Packaging	1	0.04	2.00	7.00	21.50	0.00

More images:

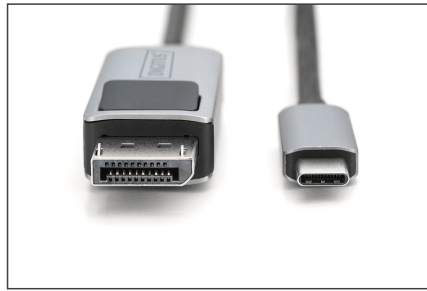

Safety notes

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
 Auf dem Schüffel 3
 Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com