

# DIGITUS 40G QSFP+ to 4XSFP+ Direct Attach Cable 2m

DN-81322  
EAN 4016032485001



**DAC Breakout cabel 2 m 1x 40G to 4x 10G 1x 40G to 4x 10 G**

The DN- 81322 Breakout DAC cables QSFP+ to 4xSFP+ is optimized to be used in Datacenter. They meet the ever increasing demand for higher channel density with high-level signal integrity in high performance computing, core switches and NAS Systems.

**Up to 10.3125Gbps data rate per channel, Up to 5m transmission, Operating temperature: 0~70, Single +3.3V power supply**

- Channel data rate 10.3125 Gbps
- Operating temperature 0 to + 70°C
- Storage temperature -40 to + 85°C
- Supply voltage 3.3 V nominal


- Interface: 38-pin connector (QSFP+)
- 20-pin connector (SFP+)
- Management interface Serial, I2C
- Compatible with the following manufacturers: Allnet, CISCO, 3COM, D-LINK, Dell, Edimax, Etherwan, ENTERASYS, EXTREME, FINISAR, FORCE 10, Fortinet, HUAWEI, IBM, JUNIPER, LINKSYS, NETGEAR, NORTEL, RIVERSTONE, ZTE, ZYXEL
- DDM Support: no

**Package contents**

- 40G QSFP+ to 4XSFP+ Direct Attach Cable 2m

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	85	15.00	48.00	48.00	38.00	87,552.00
Packaging Unit Inside	1	0.18	0.00	0.00	0.00	0.00
Packaging Unit Single	1	0.18	26.00	26.00	3.00	2,028.00
Net single without Packaging	1	0.32	5.80	1.40	1.10	0.00

**More images:**

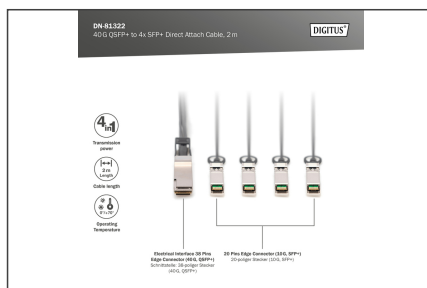

**Safety notes**

- Avoid direct contact with light sources: Fiber optic cables, especially those with active light sources such as lasers (e.g. in optical communication systems), can emit dangerous radiation that can damage eyes. Take care never to look directly into the light of an optical fiber, even if the light source is invisible to the naked eye.
- When working with fiber optic cables, especially during tests or when working with lasers, protective goggles should always be worn to protect against harmful radiation.
- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Do not kink or crush: Fiber optic cables are sensitive to mechanical stress.
- To protect cables from physical damage, they should be laid in special ducts or with protective materials
- Keep cable connectors clean: Fiber optic cables are sensitive to dust and dirt. Even small particles on the connectors can severely impair the signal quality.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
Auf dem Schüffel 3  
Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)