

# DIGITUS 40G QSFP+ to 4XSFP+ Direct Attach Cable 2m

DN-81322  
EAN 4016032485001



**DAC Breakout cabel 2 m 1x 40G to 4x 10G 1x 40G to 4x 10 G**

The DN- 81322 Breakout DAC cables QSFP+ to 4xSFP+ is optimized to be used in Datacenter. They meet the ever increasing demand for higher channel density with high-level signal integrity in high performance computing, core switches and NAS Systems.

**Up to 10.3125Gbps data rate per channel, Up to 5m transmission, Operating temperature: 0~70, Single +3.3V power supply**

- Channel data rate 10.3125 Gbps
- Operating temperature 0 to + 70°C
- Storage temperature -40 to + 85°C
- Supply voltage 3.3 V nominal

- Interface: 38-pin connector (QSFP+)
- 20-pin connector (SFP+)
- Management interface Serial, I2C
- Compatible with the following manufacturers: Allnet, CISCO, 3COM, D-LINK, Dell, Edimax, Etherwan, ENTERASYS, EXTREME, FINISAR, FORCE 10, Fortinet, HUAWEI, IBM, JUNIPER, LINKSYS, NETGEAR, NORTEL, RIVERSTONE, ZTE, ZYXEL

**Attributes**


- DDM Support: no

**Package contents**

- 40G QSFP+ to 4XSFP+ Direct Attach Cable 2m

| Logistics                    |              |             |            |            |             |                 |
|------------------------------|--------------|-------------|------------|------------|-------------|-----------------|
|                              | Number (pcs) | Weight (kg) | Depth (cm) | Width (cm) | Height (cm) | cm <sup>3</sup> |
| Packaging Unit Carton        | 85           | 15.00       | 48.00      | 48.00      | 38.00       | 87,552.00       |
| Packaging Unit Inside        | 1            | 0.18        | 0.00       | 0.00       | 0.00        | 0.00            |
| Packaging Unit Single        | 1            | 0.18        | 26.00      | 26.00      | 3.00        | 2,028.00        |
| Net single without Packaging | 1            | 0.32        | 5.80       | 1.40       | 1.10        | 0.00            |

**More images:**

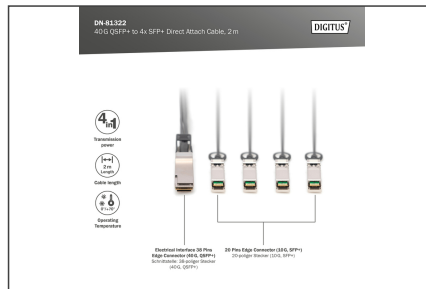

**Safety notes**

- Avoid direct contact with light sources: Fiber optic cables, especially those with active light sources such as lasers (e.g. in optical communication systems), can emit dangerous radiation that can damage
- eyes. Take care never to look directly into the light of an optical fiber, even if the light source is invisible to the naked eye.
- When working with fiber optic cables, especially during tests or when working with lasers, protective goggles should always be worn to protect against harmful radiation.
- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Do not kink or crush: Fiber optic cables are sensitive to mechanical stress.
- To protect cables from physical damage, they should be laid in special ducts or with protective materials
- Keep cable connectors clean: Fiber optic cables are sensitive to dust and dirt. Even small particles on the connectors can severely impair the signal quality.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
Auf dem Schüffel 3  
Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)