

DIGITUS USB-C Charger, 2-port, 65W GaN

DA-10063
 EAN 4016032485803



USB-C Mini charger, 2-Port, 65W 2x USB-C, 45W+20W, white

The Dual Port Charging Adapter from DIGITUS® is a powerful travel charger with a maximum power output of 65 W. Equipped with 2 C connections, the total output supports up to 65 W and can thus charge 2 devices (45W + 20W) simultaneously. Compatible with multiple protocols (with PPS function, supports Samsung S20, S20+, S10, S10+, Note10 and other tablets and smartphones). The integrated short circuit, surge and excess current protection provides added security. Furthermore, the integrated excess heat protection prevents potential overloads and damages to the charger or connected devices.

High-performance GaN charging adapter with an output of up to 65 W for USB-C devices of all kinds

- Type: Charging device/power adapter
- Connection: 2x USB-C
- Compatible with smartphones with 65W charging adapter, e.g. from Apple, XIAOMI, Google, Samsung S20, S20+, S10, S10+, Note10 and tablets


- Supports Power Delivery 3.0 and PPS function with 65W charging capacity
- Input voltage: 100 - 240 V AC, 50/60 Hz
- "Output voltage: □USB-C1/C2: PD 65W (PD: 5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/3.25A), PPS: 3.3V-21V/3.25A)"
- "Output voltage: USB-C1+C2: □C1: PD 45W (PD: 5V/3A, 9V/3A, 12V/3A, 20V/2.25A), PPS:3.3 - 16V/3A□C2: PD 20W (5V/3A, 9V/2.22A) PPS: 3.3-5.9V/3A, 3.3V-11V/2.2A, 20W Max"
- Surge protection / excess current protection / overload protection / short circuit protection
- Protection against overheating with automatic switch-off and recovery (auto-recovery)
- Dimensions: L 38 x W 40.5 x H 85 mm
- Color: White
- Weight: 122 g

Package contents

- 1x USB-C Mini Charging Adapter
- QIG (Quick Installation Guide)

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	50	8.50	27.00	27.00	37.00	26,973.00
Packaging Unit Inside	1	0.17	0.00	0.00	0.00	0.00
Packaging Unit Single	1	0.17	5.00	12.00	7.00	420.00
Net single without Packaging	1	0.12	3.80	4.10	4.40	0.00

More images:

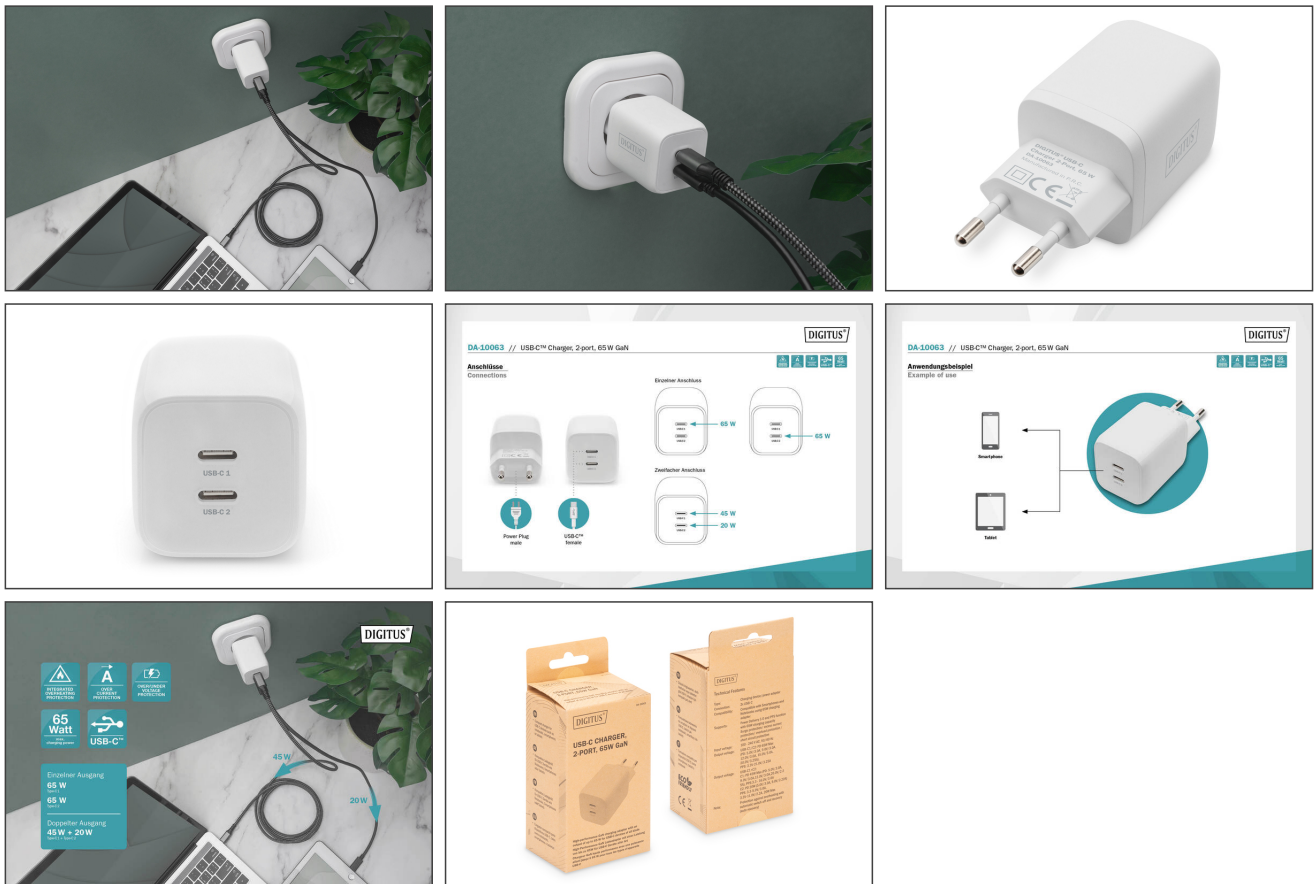

Safety notes

- Use charging adapters or power supply units in accordance with the instructions in the operating instructions to ensure optimum performance.
- Connect the charging adapter to an easily accessible socket in the voltage range between 100-240 V AC.
- Disconnect the charging adapter from the socket after use.
- Do not use the charging adapter with electronic devices that are outside the specifications of the charging adapter.
- Do not expose the device to rain, moisture, vapors or liquids.
- Do not insert any objects into the device.
- Do not attempt to repair the unit or open the housing without authorization. You risk an electric shock!
- Ensure adequate ventilation to prevent damage due to overheating.
- Dust, moisture, vapors and strong cleaning agents or solvents can cause damage to the device.
- Disconnect the appliance from the power supply and the connected devices before cleaning.
- Clean the device with a dust-free cloth.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.
 ASSMANN Electronic GmbH
 Auf dem Schüffel 3
 Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com