

ednet 2.0 Multimedia Desktop Speaker

83172
EAN 4054007831729



2.0 Desktop Speaker 6W (RMS), USB-powered, black

The ednet 2.0 Multimedia Desktop Speakers complete perfectly your laptop or PC. Due to clear and full stereo sound of the speakers, your media become a genuine sound experience. Thanks to the state-of-the-art and compact design, the 2.0 Multimedia Desktop Speakers fit perfectly into any setting. The USB interface of your device guarantees the power supply of the speakers. It is up to you to decide whether you want to use the port on your device or a USB charging adapter for the local power supply. In addition to usual volume control via PC or laptop, volume can be controlled directly on the cable of the speakers.

Compact and state-of-the-art desktop speakers with crystal-clear sound.

- Power output: 6W (RMS), 4 ohms
- Frequency range: 40Hz - 20kHz
- Signal-noise ratio: > 60dB


- Input sensitivity: 600 mV
- Distortion: < 0.3%
- 6W (RMS) power output, each with 3W (RMS) per loudspeaker, offer a clear and full stereo sound for a genuine sound experience
- More flexible application thanks to the power supply via USB.
- Volume control on cable
- Compact, state-of-the-art design fits into any setting.
- AUX connector for connection to PC, laptop, smartphone, tablet PC, etc.
- Length of AUX and USB cables: 1.10m
- Dimensions of speakers (1 pc): W 6.5 x D 6.5 x H 8.0 cm
- Weight: 370 g
- Color: black/anthracite


Package contents

- 2.0 Multimedia Desktop Speaker
- User manual

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	40	17.70	42.00	31.50	36.00	47,628.00
Packaging Unit Inside	1	0.44	8.50	15.00	8.50	1,083.75
Packaging Unit Single	1	0.44	8.50	15.00	8.50	1,083.75
Net single without Packaging	1	0.19	8.00	7.00	8.00	0.00

More images:

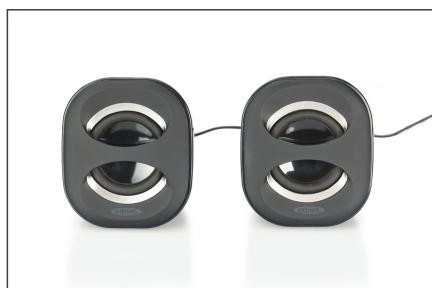

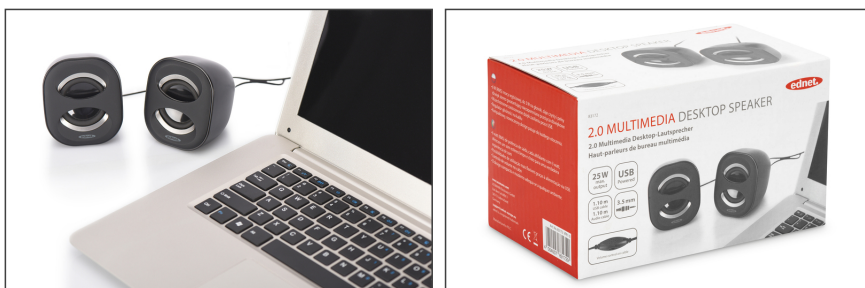

Safety notes

- If the device is powered by a plug-in power supply, ensure that the power adapter is connected correctly and meets the specified requirements (e.g. voltage and current).
- Only use certified CAT5e or CAT6 cables to ensure stable signal transmission.
- For particularly long cable runs or in environments prone to interference, it is recommended to use shielded network cables.
- Make sure that all connections are tight and secure to avoid loose contacts that could affect the signal quality. Make sure that the HDMI and Ethernet connections are properly connected.
- Make sure that the CAT cable is not laid near high-voltage power lines or other strong sources of electromagnetic interference to avoid signal interference.
- Only operate the device within the specified temperature range.
- Do not use the device outdoors or in damp or wet environments
- Check all connections and cables regularly for wear or damage. Cables and connections can wear out, especially with frequent use or long installations, which can lead to poor signal quality or system failure.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schöffel 3
Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com