


DIGITUS Modular plugs for flat cable

A-MO4/4SF
EAN 4016032065104

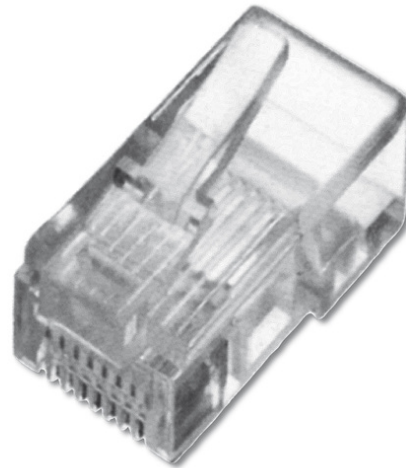

Modular Plug, for Flat Cable, 4P4C Unshielded

Easy assembly by modular crimping tool DN-94004

- CAT 3
- RJ10 4P4C
- Unshielded
- Mating cycles: ≥ 750
- Insertion force: ≤ 20N
- Material contacts: Phosphor bronze

- Contacts coating: Nickel, gold plated 0.6 µ
- Material connector body: Polycarbonat, clear
- Diameter Cu-Conductor: AWG (27/7 ... 24/7)
- Temperature range: -40°C ... +80°C
- Diameter outer jacket: 2,0 ... 3,5mm
- Current carrying capacity: 1,5A at 50°C
- Flammability Rating: UL94V-2
- Operating temperature: -40 °C to +80 °C
- Current carrying capacity: 1A -1.5A at 50 °C

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm ³
Packaging Unit Carton	20000	15.00	42.50	32.00	25.00	34.00
Packaging Unit Inside	1	0.75	6.00	20.00	29.00	3.50
Packaging Unit Single	100	0.01	3.00	8.50	13.50	344.30
Net single without Packaging	0	0.01	3.00	8.50	13.50	344.30