

DIGITUS Double Frame Open Rack, unmounted - 530x870 mm (WxD)

DN-19-42U-D
EAN 4016032189893



42U double frame open rack, unmounted 2022x530x870 mm, color grey (RAL 7035)

The unmounted open racks from DIGITUS® Professional offer network- or server application possibilities where there is no need of a closed enclosure due to security, climatized and dust free environments like data centers, laboratories, clean rooms, etc. The open racks are delivered unmounted in a flat-pack which provides a cost effective and economical solution. While being able to install quick and easy it consists of strong material for maximum performance.

Modular and sturdy structure made for high demand IT infrastructure solutions - designed and developed on highest standards.

- 2.0 mm strong steel material on frame system
- 4.0 mm strong steel material on top and bottom L-support connection pieces
- Modular structure which allows universal mounting options on each profile
- incl. adjustable feet group
- Delivery in unmounted flat-pack

- Load capacity: 600 kg
- Size of top- and base chassis: 530 x 410 mm (W x D)
- Max. equipment mounting depth: 570 mm
- Depth of complete base chassis incl. supporting L-shape parts: 870 mm

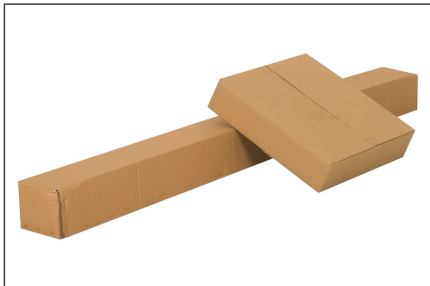
Attributes

- Cabinet type: Open rack, unmounted
- Color: light grey, RAL 7035
- Depth: 870 mm
- Front door: without
- Load capacity: 600 kg
- Rear door: without
- Side panels: Without
- Units: 42
- Width: 530 mm
- IP protection class: without
- Mounted: no

Package contents

- Fixing material

| Logistics | | | | | | |
|------------------------------|--------------|-------------|------------|------------|-------------|------------|
| | Number (pcs) | Weight (kg) | Depth (cm) | Width (cm) | Height (cm) | cm³ |
| Packaging Unit Carton | 1 | 45.60 | 203.00 | 11.00 | 54.50 | 121,698.00 |
| Packaging Unit Inside | 1 | 45.60 | 203.00 | 11.00 | 54.50 | 121,698.00 |
| Packaging Unit Single | 1 | 45.60 | 203.00 | 11.00 | 54.50 | 121,698.00 |
| Net single without Packaging | 0 | 41.00 | 87.00 | 53.00 | 202.20 | 932,344.00 |

More images:**Safety notes**

- Ensure adequate ventilation to prevent the installed devices from overheating.
- Network cabinets should not be overfilled and the ventilation openings must not be blocked.
- Cables should be laid neatly and organized in cable ducts or trays.
- Use surge protection devices to protect sensitive devices from power surges or lightning strikes.
- Avoid moisture or wetness while observing the respective IP protection class.
- Ensure that the cabinet and the devices used are properly earthed.
- In regions with frequent thunderstorm activity, professional lightning protection should be integrated into the power supply.
- To avoid uneven loading, always mount the heaviest units at the bottom of the cabinet.
- Disconnect the installed devices from the power supply during maintenance or installation work.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com