

DIGITUS mini GBIC (SFP) Module, 1.25 Gbps, 0.55km

DN-81000
EAN 4016032305651



1.25 Gbps SFP Module, Multimode LC Duplex Connector, 850nm, Up to 550m

The DIGITUS® mini GBIC (SFP) transceiver modules offer highest quality and reliability. Whether from switch to switch, converter to switch, converter to converter or any else application: The wide product range of DIGITUS® modules makes possible a flexible usage of the fiber technology. The conformity to the MSA (Multi Source Agreement) standard ensures a compatibility to third party manufacturers.

The plug and play fiber connection

- Mini GBIC SFP (Small Form Factor Pluggable) module
- Compatible with the following manufacturers: Allied Telesis, Allnet, Avaya, CISCO, D-Link, Edimax, FINISAR, FORCE 10, Gigamon, Intellinet, KTI Networks, Level One, PLANET, Tenda, TP-Link, TRENDnet, Mikrotik, ENTERASYS, RIVERSTONE, Unifi, Ubiquiti, ZyXEL, ZTE
- High quality and excellent reliability
- 1.25 Gbps Maximum Data Rate
- Compliant to IEEE 802.3z Gigabit Standard
- Class 1 laser product compliant with EN 60825-1
- Easy plug-and-play installation
- MSA (Multi Source Agreement) compliant


- Hot pluggable
- Connector: 1x LC Duplex
- 1000Base-SX - For Short Haul
- Wavelength: 850nm
- Transmission power: minimum -8 dBm, maximum -3 dBm
- Sensitivity Receiving Power: Minimum -20 dBm
- For a Distance of up to 0.55km
- Suitable for 50/125µm and 62.5/125µm multimode fiber cables
- Safe fast-locking mechanism
- 3.3V power supply
- Operating temperature: 0 °C ~ 70 °C
- Mode: Multimode
- Connector: LC
- Distance (km): 0.5
- Wavelength: 850 nm
- DDM Support: no
- Broadcasting Mode: Unidirectional
- Manufacturer compatibility: Universal (MSA), Cisco
- Ethernet speed: Gigabit

Package contents

- SFP module

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	240	8.50	50.00	29.00	54.50	79.00
Packaging Unit Inside	30	1.06	7.00	20.00	30.00	4.20
Packaging Unit Single	30	0.04	3.10	11.80	9.30	340.20
Net single without Packaging	0	0.04	1.00	5.90	0.80	4.70

More images:

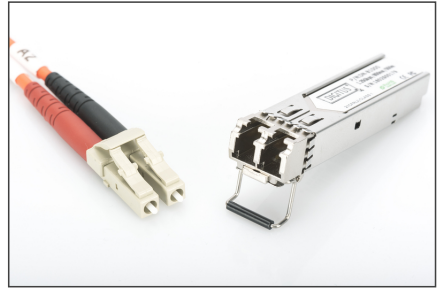

SFP Modules							
Product Number	DOM Code	Speed	Distance	Connector	Mounting	Operating Temperature	Industrial Version
Full Duplex							
DM-0101	42700000040	1.0 Gbps	2 km	LC-Multimode Duplex	191mm	0 to +70 °C	✓
DM-0102	42700000070	1.0 Gbps	550 m	LC-BiDirectional Duplex	191mm	0 to +70 °C	✓
DM-0104	42700000070	1.0 Gbps	550 m	LC-BiDirectional Duplex	191mm	0 to +70 °C	✓
Simplex							
DM-0105	42700000080	1.0 Gbps	550 m	LC-Multimode Duplex	191mm	0 to +70 °C	✓
DM-0106	42700000080	1.0 Gbps	550 m	LC-BiDirectional Duplex	191mm	0 to +70 °C	✓
DM-0107	42700000080	1.0 Gbps	550 m	LC-BiDirectional Duplex	191mm	0 to +70 °C	✓
DM-0108	42700000070	1.0 Gbps	550 m	LC-BiDirectional Duplex	191mm	0 to +70 °C	✓
DM-0109	42700000070	1.0 Gbps	550 m	LC-BiDirectional Duplex	191mm	0 to +70 °C	✓
10G							
DM-0110	42700000100	10 Gbps	300 m	LC-Multimode Duplex	191mm	0 to +70 °C	✓
DM-0111	42700000100	10 Gbps	300 m	LC-BiDirectional Duplex	191mm	0 to +70 °C	✓
10G Base-R							
DM-0112	42700000120	10 Gbps	300 m	LC-Multimode Duplex	191mm	0 to +70 °C	✓
DM-0113	42700000120	10 Gbps	300 m	LC-BiDirectional Duplex	191mm	0 to +70 °C	✓
DM-0114	42700000120	10 Gbps	300 m	LC-BiDirectional Duplex	191mm	0 to +70 °C	✓
DM-0115	42700000120	10 Gbps	300 m	LC-BiDirectional Duplex	191mm	0 to +70 °C	✓
DM-0116	42700000120	10 Gbps	300 m	LC-BiDirectional Duplex	191mm	0 to +70 °C	✓
DM-0117	42700000120	10 Gbps	300 m	LC-BiDirectional Duplex	191mm	0 to +70 °C	✓
DM-0118	42700000120	10 Gbps	300 m	LC-BiDirectional Duplex	191mm	0 to +70 °C	✓
DM-0119	42700000120	10 Gbps	300 m	LC-BiDirectional Duplex	191mm	0 to +70 °C	✓
DM-0120	42700000120	10 Gbps	300 m	LC-BiDirectional Duplex	191mm	0 to +70 °C	✓