


DIGITUS Industrial mini GBIC (SFP) Module, 1.25 Gbps, 0.55km

DN-81010
EAN 4016032307570

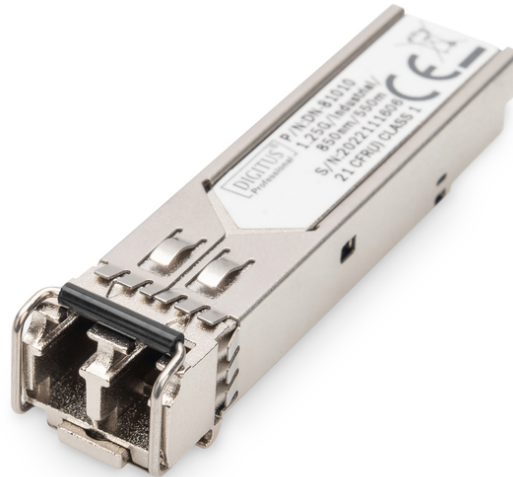

1.25 Gbps SFP Module, Multimode, Industrial ver. LC Duplex Connector, 850nm, up to 550m

The DIGITUS® mini GBIC (SFP) transceiver modules offer highest quality and reliability. Whether from switch to switch, converter to switch, converter to converter or any else application: The wide product range of DIGITUS® modules makes possible a flexible usage of the fiber technology. The conformity to the MSA (Multi Source Agreement) standard ensures a compatibility to third party manufacturers.

The plug and play fiber connection

- Mini GBIC SFP (Small Form Factor Pluggable) module
- Compatible with the following manufacturers: Allied Telesis, Allnet, Avaya, CISCO, D-Link, Edimax, FINISAR, FORCE 10, Gigamon, Intellinet, KTI Networks, Level One, PLANET, Tenda, TP-Link, TRENDnet, Mikrotik, ENTERASYS, RIVERSTONE, Unifi, Ubiquiti, ZyXEL, ZTE
- High quality and excellent reliability
- 1.25 Gbps Maximum Data Rate
- Compliant to IEEE 802.3z Gigabit Standard
- Class 1 laser product compliant with EN 60825-1
- Easy plug-and-play installation
- MSA (Multi Source Agreement) compliant


- Hot pluggable
- Connector: 1x LC Duplex
- 1000Base-SX - For Short Haul
- Wavelength: 850nm
- Transmission power: minimum -8 dBm, maximum -3 dBm
- Sensitivity Receiving Power: Minimum -20 dBm
- For a Distance of up to 0.55km
- Suitable for 50/125µm and 62.5/125µm multimode fiber cables
- Safe fast-locking mechanism
- 3.3V power supply
- Operating temperature: -40 °C - +85 °C
- Mode: Multimode
- Connector: LC
- Distance (km): 0.5
- Wavelength: 850 nm
- DDM Support: no
- Broadcasting Mode: Unidirectional
- Manufacturer compatibility: Universal (MSA), Cisco
- Ethernet speed: Fast Ethernet

Package contents

- SFP module

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	240	8.50	50.00	29.00	54.50	79.00
Packaging Unit Inside	30	1.06	7.00	20.00	30.00	4.20
Packaging Unit Single	30	0.04	10.00	7.00	2.00	140.00
Net single without Packaging	0	0.04	0.00	0.00	0.00	0.00

More images:

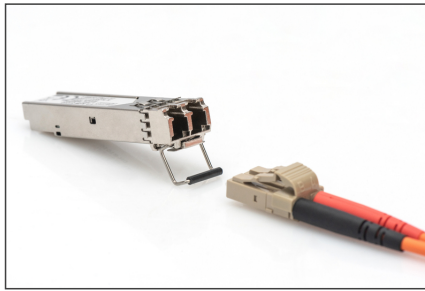

SFP Modules							
Product Number	RAM Code	Speed	Distance	Connector	Mounting	Operating Temperature	Industrial Version
Fast Ethernet							
DM-4001	4298020040	1.0 Gbps	2 km	LC Multimode Duplex	191mm	0 to +75 °C	✓
DM-4002	4298020070	1.0 Gbps	55 km	LC Singlemode Duplex	191mm	0 to +75 °C	✓
DM-4004	4298020070	1.0 Gbps	55 km	LC Singlemode Duplex	191mm	0 to +75 °C	✓
10G Ethernet							
10G Ethernet							
DM-4005	4298020081	10 Gbps	100 m	LC Multimode Duplex	191mm	0 to +75 °C	✓
DM-4006	4298020082	10 Gbps	200 m	LC Multimode Duplex	191mm	0 to +75 °C	✓
DM-4007	4298020083	10 Gbps	200 m	LC Multimode Duplex	191mm	0 to +75 °C	✓
DM-4008	4298020084	10 Gbps	200 m	LC Multimode Duplex	191mm	0 to +75 °C	✓
DM-4009	4298020085	10 Gbps	200 m	LC Multimode Duplex	191mm	0 to +75 °C	✓
DM-4010	4298020086	10 Gbps	200 m	LC Multimode Duplex	191mm	0 to +75 °C	✓
DM-4011	4298020087	10 Gbps	200 m	LC Multimode Duplex	191mm	0 to +75 °C	✓
DM-4012	4298020088	10 Gbps	200 m	LC Multimode Duplex	191mm	0 to +75 °C	✓
DM-4013	4298020089	10 Gbps	200 m	LC Multimode Duplex	191mm	0 to +75 °C	✓
DM-4014	4298020090	10 Gbps	200 m	LC Multimode Duplex	191mm	0 to +75 °C	✓
DM-4015	4298020091	10 Gbps	200 m	LC Multimode Duplex	191mm	0 to +75 °C	✓
DM-4016	4298020092	10 Gbps	200 m	LC Multimode Duplex	191mm	0 to +75 °C	✓
DM-4017	4298020093	10 Gbps	200 m	LC Multimode Duplex	191mm	0 to +75 °C	✓
DM-4018	4298020094	10 Gbps	200 m	LC Multimode Duplex	191mm	0 to +75 °C	✓
DM-4019	4298020095	10 Gbps	200 m	LC Multimode Duplex	191mm	0 to +75 °C	✓
DM-4020	4298020096	10 Gbps	200 m	LC Multimode Duplex	191mm	0 to +75 °C	✓
DM-4021	4298020097	10 Gbps	200 m	LC Multimode Duplex	191mm	0 to +75 °C	✓
DM-4022	4298020098	10 Gbps	200 m	LC Multimode Duplex	191mm	0 to +75 °C	✓
DM-4023	4298020099	10 Gbps	200 m	LC Multimode Duplex	191mm	0 to +75 °C	✓
DM-4024	4298020100	10 Gbps	200 m	LC Multimode Duplex	191mm	0 to +75 °C	✓