

# DIGITUS HP-compatible mini GBIC (SFP) Module, 1.25 Gbps, 20km, with DDM Feature

DN-81003-01  
EAN 4016032391562



## 1.25 Gbps SFP Module, Singlemode, BiDi, HP-comp. LC Simplex, Tx1310nm/Rx1550nm, up to 20km, HP

The DIGITUS® mini GBIC (SFP) transceiver modules offer highest quality and reliability. Whether from switch to switch, converter to switch, converter to converter or any else application: The wide product range of DIGITUS® modules makes possible a flexible usage of the fiber technology. The conformity to the MSA (Multi Source Agreement) standard ensures a compatibility to third party manufacturers.

### The plug and play fiber connection

- HP compatible
- HP-Aruba compatible
- Mini GBIC SFP (Small Form Factor Pluggable) module
- Supports DDM (Digital Diagnostic Monitoring)
- Bidirectional WDM Module - Only one fiber is needed
- High quality and excellent reliability
- 1.25 Gbps Maximum Data Rate
- Compliant to IEEE 802.3z Gigabit Standard
- Class 1 laser product compliant with EN 60825-1
- Easy plug-and-play installation
- MSA (Multi Source Agreement) compliant
- Hot pluggable
- Connector: 1x LC Simplex
- Wavelength: Tx 1310nm / Rx 1550nm

- Transmission Power: Minimum -5 dBm, Maximum 0 dBm
- Sensitivity receiving power: minimum -24 dBm
- For a Distance of up to 20km
- Suitable for 09/125µm Singlemode Fiber Cables
- Safe fast-locking mechanism
- 3.3V power supply
- Operating temperature: 0 °C ~ 70 °C
- Compatible with the following manufacturers: Allied Telesis, Allnet, Avaya, CISCO, D-Link, Edimax, FINISAR, FORCE 10, Gigamon, Intellinet, KTI Networks, Level One, PLANET, Tenda, TP-Link, TRENDnet, Mikrotik, ENTERASYS, RIVERSTONE, Unifi, Ubiquiti, ZyXEL, ZTE

### Attributes

- Mode: Singlemode
- Connector: LC
- Distance (km): 20
- Wavelength: 1310/1550 nm
- DDM Support: yes
- Broadcasting Mode: Biidirectional
- Manufacturer compatibility: HP
- Ethernet speed: Fast Ethernet


### Package contents

- SFP module

### Logistics

	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm <sup>3</sup>
Packaging Unit Carton	240	8.50	50.00	29.00	54.50	79.03
Packaging Unit Inside	1	0.04	7.00	20.00	30.00	4.20
Packaging Unit Single	1	0.04	3.00	11.50	9.00	310.50
Net single without Packaging	0	0.00	0.00	0.00	0.00	0.00

## More images:

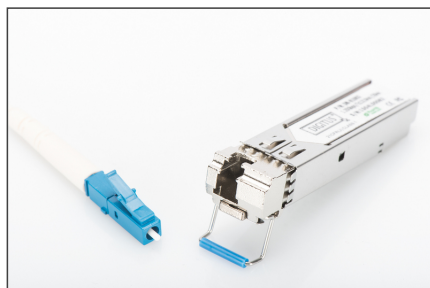

SFP Modules						
Part Number	SKU Code	Speed	Distance	Connector	Mounting	Operating Temperature
250-0100	40-00000000000000000000	10 Gbps	10 km	LC Duplex	10 Gbps	0 to 70 °C
250-0101	40-00000000000000000000	10 Gbps	10 km	LC Duplex	10 Gbps	0 to 70 °C
250-0102	40-00000000000000000000	10 Gbps	10 km	LC Duplex	10 Gbps	0 to 70 °C
250-0103	40-00000000000000000000	10 Gbps	10 km	LC Duplex	10 Gbps	0 to 70 °C
250-0104	40-00000000000000000000	10 Gbps	10 km	LC Duplex	10 Gbps	0 to 70 °C
250-0105	40-00000000000000000000	10 Gbps	10 km	LC Duplex	10 Gbps	0 to 70 °C
250-0106	40-00000000000000000000	10 Gbps	10 km	LC Duplex	10 Gbps	0 to 70 °C
250-0107	40-00000000000000000000	10 Gbps	10 km	LC Duplex	10 Gbps	0 to 70 °C
250-0108	40-00000000000000000000	10 Gbps	10 km	LC Duplex	10 Gbps	0 to 70 °C
250-0109	40-00000000000000000000	10 Gbps	10 km	LC Duplex	10 Gbps	0 to 70 °C
250-0110	40-00000000000000000000	10 Gbps	10 km	LC Duplex	10 Gbps	0 to 70 °C
250-0111	40-00000000000000000000	10 Gbps	10 km	LC Duplex	10 Gbps	0 to 70 °C
250-0112	40-00000000000000000000	10 Gbps	10 km	LC Duplex	10 Gbps	0 to 70 °C
250-0113	40-00000000000000000000	10 Gbps	10 km	LC Duplex	10 Gbps	0 to 70 °C
250-0114	40-00000000000000000000	10 Gbps	10 km	LC Duplex	10 Gbps	0 to 70 °C
250-0115	40-00000000000000000000	10 Gbps	10 km	LC Duplex	10 Gbps	0 to 70 °C
250-0116	40-00000000000000000000	10 Gbps	10 km	LC Duplex	10 Gbps	0 to 70 °C
250-0117	40-00000000000000000000	10 Gbps	10 km	LC Duplex	10 Gbps	0 to 70 °C
250-0118	40-00000000000000000000	10 Gbps	10 km	LC Duplex	10 Gbps	0 to 70 °C
250-0119	40-00000000000000000000	10 Gbps	10 km	LC Duplex	10 Gbps	0 to 70 °C
250-0120	40-00000000000000000000	10 Gbps	10 km	LC Duplex	10 Gbps	0 to 70 °C
250-0121	40-00000000000000000000	10 Gbps	10 km	LC Duplex	10 Gbps	0 to 70 °C
250-0122	40-00000000000000000000	10 Gbps	10 km	LC Duplex	10 Gbps	0 to 70 °C
250-0123	40-00000000000000000000	10 Gbps	10 km	LC Duplex	10 Gbps	0 to 70 °C
250-0124	40-00000000000000000000	10 Gbps	10 km	LC Duplex	10 Gbps	0 to 70 °C
250-0125	40-00000000000000000000	10 Gbps	10 km	LC Duplex	10 Gbps	0 to 70 °C
250-0126	40-00000000000000000000	10 Gbps	10 km	LC Duplex	10 Gbps	0 to 70 °C
250-0127	40-00000000000000000000	10 Gbps	10 km	LC Duplex	10 Gbps	0 to 70 °C
250-0128	40-00000000000000000000	10 Gbps	10 km	LC Duplex	10 Gbps	0 to 70 °C
250-0129	40-00000000000000000000	10 Gbps	10 km	LC Duplex	10 Gbps	0 to 70 °C
250-0130	40-00000000000000000000	10 Gbps	10 km	LC Duplex	10 Gbps	0 to 70 °C
250-0131	40-00000000000000000000	10 Gbps	10 km	LC Duplex	10 Gbps	0 to 70 °C
250-0132	40-00000000000000000000	10 Gbps	10 km	LC Duplex	10 Gbps	0 to 70 °C
250-0133	40-00000000000000000000	10 Gbps	10 km	LC Duplex	10 Gbps	0 to 70 °C
250-0134	40-00000000000000000000	10 Gbps	10 km	LC Duplex	10 Gbps	0 to 70 °C
250-0135	40-00000000000000000000	10 Gbps	10 km	LC Duplex	10 Gbps	0 to 70 °C
250-0136	40-00000000000000000000	10 Gbps	10 km	LC Duplex	10 Gbps	0 to 70 °C
250-0137	40-00000000000000000000	10 Gbps	10 km	LC Duplex	10 Gbps	0 to 70 °C
250-0138	40-00000000000000000000	10 Gbps	10 km	LC Duplex	10 Gbps	0 to 70 °C
250-0139	40-00000000000000000000	10 Gbps	10 km	LC Duplex	10 Gbps	0 to 70 °C
250-0140	40-00000000000000000000	10 Gbps	10 km	LC Duplex	10 Gbps	0 to 70 °C
250-0141	40-00000000000000000000	10 Gbps	10 km	LC Duplex	10 Gbps	0 to 70 °C
250-0142	40-00000000000000000000	10 Gbps	10 km	LC Duplex	10 Gbps	0 to 70 °C
250-0143	40-00000000000000000000	10 Gbps	10 km	LC Duplex	10 Gbps	0 to 70 °C
250-0144	40-00000000000000000000	10 Gbps	10 km	LC Duplex	10 Gbps	0 to 70 °C
250-0145	40-00000000000000000000	10 Gbps	10 km	LC Duplex	10 Gbps	0 to 70 °C
250-0146	40-00000000000000000000	10 Gbps	10 km	LC Duplex	10 Gbps	0 to 70 °C
250-0147	40-00000000000000000000	10 Gbps	10 km	LC Duplex	10 Gbps	0 to 70 °C
250-0148	40-00000000000000000000	10 Gbps	10 km	LC Duplex	10 Gbps	0 to 70 °C
250-0149	40-00000000000000000000	10 Gbps	10 km	LC Duplex	10 Gbps	0 to 70 °C
250-0150	40-00000000000000000000	10 Gbps	10 km	LC Duplex	10 Gbps	0 to 70 °C
250-0151	40-00000000000000000000	10 Gbps	10 km	LC Duplex	10 Gbps	0 to 70 °C
250-0152	40-00000000000000000000	10 Gbps	10 km	LC Duplex	10 Gbps	0 to 70 °C
250-0153	40-00000000000000000000	10 Gbps	10 km	LC Duplex	10 Gbps	0 to 70 °C
250-0154	40-00000000000000000000	10 Gbps	10 km	LC Duplex	10 Gbps	0 to 70 °C
250-0155	40-00000000000000000000	10 Gbps	10 km	LC Duplex	10 Gbps	0 to 70 °C
250-0156	40-00000000000000000000	10 Gbps	10 km	LC Duplex	10 Gbps	0 to 70 °C
250-0157	40-00000000000000000000	10 Gbps	10 km	LC Duplex	10 Gbps	0 to 70 °C
250-0158	40-00000000000000000000	10 Gbps	10 km	LC Duplex	10 Gbps	0 to 70 °C
250-0159	40-00000000000000000000	10 Gbps	10 km	LC Duplex	10 Gbps	0 to 70 °C
250-0160	40-00000000000000000000	10 Gbps	10 km	LC Duplex	10 Gbps	0 to 70 °C
250-0161	40-00000000000000000000	10 Gbps	10 km	LC Duplex	10 Gbps	0 to 70 °C
250-0162	40-00000000000000000000	10 Gbps	10 km	LC Duplex	10 Gbps	0 to 70 °C
250-0163	40-00000000000000000000	10 Gbps	10 km	LC Duplex	10 Gbps	0 to 70 °C
250-0164	40-00000000000000000000	10 Gbps	10 km	LC Duplex	10 Gbps	0 to 70 °C
250-0165	40-00000000000000000000	10 Gbps	10 km	LC Duplex	10 Gbps	0 to 70 °C
250-0166	40-00000000000000000000	10 Gbps	10 km	LC Duplex	10 Gbps	0 to 70 °C
250-0167	40-00000000000000000000	10 Gbps	10 km	LC Duplex	10 Gbps	0 to 70 °C
250-0168	40-00000000000000000000	10 Gbps	10 km	LC Duplex	10 Gbps	0 to 70 °C
250-0169	40-00000000000000000000	10 Gbps	10 km	LC Duplex	10 Gbps	0 to 70 °C
250-0170	40-00000000000000000000	10 Gbps	10 km	LC Duplex	10 Gbps	0 to 70 °C
250-0171	40-00000000000000000000	10 Gbps	10 km	LC Duplex	10 Gbps	0 to 70 °C
250-0172	40-00000000000000000000	10 Gbps	10 km	LC Duplex	10 Gbps	0 to 70 °C
250-0173	40-00000000000000000000	10 Gbps	10 km	LC Duplex	10 Gbps	0 to 70 °C
250-0174	40-00000000000000000000	10 Gbps	10 km	LC Duplex	10 Gbps	0 to 70 °C
250-0175	40-00000000000000000000	10 Gbps	10 km	LC Duplex	10 Gbps	0 to 70 °C
250-0176	40-00000000000000000000	10 Gbps	10 km	LC Duplex	10 Gbps	0 to 70 °C
250-0177	40-00000000000000000000	10 Gbps	10 km	LC Duplex	10 Gbps	0 to 70 °C
250-0178	40-00000000000000000000	10 Gbps	10 km	LC Duplex	10 Gbps	0 to 70 °C
250-0179	40-00000000000000000000	10 Gbps	10 km	LC Duplex	10 Gbps	0 to 70 °C
250-0180	40-00000000000000000000	10 Gbps	10 km	LC Duplex	10 Gbps	0 to 70 °C
250-0181	40-00000000000000000000	10 Gbps	10 km	LC Duplex	10 Gbps	0 to 70 °C
250-0182	40-00000000000000000000	10 Gbps	10 km	LC Duplex	10 Gbps	0 to 70 °C
250-0183	40-00000000000000000000	10 Gbps	10 km	LC Duplex	10 Gbps	0 to 70 °C
250-0184	40-00000000000000000000	10 Gbps	10 km	LC Duplex	10 Gbps	0 to 70 °C
250-0185	40-00000000000000000000	10 Gbps	10 km	LC Duplex	10 Gbps	0 to 70 °C
250-0186	40-00000000000000000000	10 Gbps	10 km	LC Duplex	10 Gbps	0 to 70 °C
250-0187	40-00000000000000000000	10 Gbps	10 km	LC Duplex	10 Gbps	0 to 70 °C
250-0188	40-00000000000000000000	10 Gbps	10 km	LC Duplex	10 Gbps	0 to 70 °C
250-0189	40-00000000000000000000	10 Gbps	10 km	LC Duplex	10 Gbps	0 to 70 °C
250-0190	40-00000000000000000000	10 Gbps	10 km	LC Duplex	10 Gbps	0 to 70 °C
250-0191	40-00000000000000000000	10 Gbps	10 km	LC Duplex	10 Gbps	0 to 70 °C
250-0192	40-00000000000000000000	10 Gbps	10 km	LC Duplex	10 Gbps	0 to 70 °C
250-0193	40-00000000000000000000	10 Gbps	10 km	LC Duplex	10 Gbps	0 to 70 °C
250-0194	40-00000000000000000000	10 Gbps	10 km	LC Duplex	10 Gbps	0 to 70 °C
250-0195	40-00000000000000000000	10 Gbps	10 km	LC Duplex	10 Gbps	0 to 70 °C
250-0196	40-00000000000000000000	10 Gbps	10 km	LC Duplex	10 Gbps	0 to 70 °C
250-0197	40-00000000000000000000	10 Gbps	10 km	LC Duplex	10 Gbps	0 to 70 °C
250-0198	40-00000000000000000000	10 Gbps	10 km	LC Duplex	10 Gbps	0 to 70 °C
250-0199	40-00000000000000000000	10 Gbps	10 km	LC Duplex	10 Gbps	0 to 70 °C
250-0200	40-00000000000000000000	10 Gbps	10 km	LC Duplex	10 Gbps	0 to 70 °C

## Safety notes

- Avoid direct contact with light sources: Fiber optic cables, especially those with active light sources such as lasers (e.g. in optical communication systems), can emit dangerous radiation that can damage
- eyes. Take care never to look directly into the light of an optical fiber, even if the light source is invisible to the naked eye.
- When working with fiber optic cables, especially during tests or when working with lasers, protective goggles should always be worn to protect against harmful radiation.
- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Do not kink or crush: Fiber optic cables are sensitive to mechanical stress.
- To protect cables from physical damage, they should be laid in special ducts or with protective materials
- Keep cable connectors clean: Fiber optic cables are sensitive to dust and dirt. Even small particles on the connectors can severely impair the signal quality.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage

## EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
Auf dem Schüffel 3  
Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)