


DIGITUS Cat.7 S/FTP burial installation cable, 500 m, simplex, PE

DK-1741-VH-5-OD
EAN 4016032431084

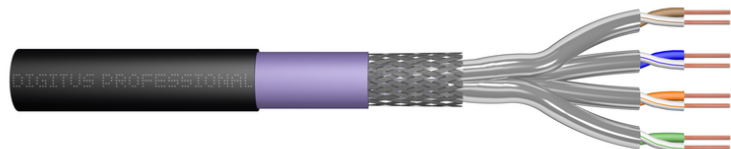

DIGITUS CAT 7 S-FTP PiMF installation cable, raw 500m, drum, AWG 23/1, 1200 MHz, PE, sx, bl

The Digitus® Professional Cat.7 S/FTP burial installation cable is characterized by the following cable construction 4x2x AWG23/1 and reaches a transmission frequency up to 1200 MHz. The cable has a PE outer jacket and a halogen free inner jacket and is conform to the standard IEC 60332-1, FRNC-B, LSZH-1 and CPR Euro class Eca. The cable is suitable for installations in dry or wet areas, outdoor or ground. Compliant with the following standards ISO/IEC 11801, DIN EN 50173, DIN EN 50288-4-1.

Future-oriented standards and high-end quality for your network.

- Physical properties:
- Conductor: Bare annealed copper, solid AWG 23/1
- Insulation: SFS-PE (Foam-Skin Polyethylene)
- Total number of insulated conductors: 8, twisted in 4 pairs
- Color code: Blue-white, orange-white, green-white, brown-white
- Individual pair shielding: Aluminum foil, providing 100 % coverage
- Overall shielding: Copper wire braid
- Outer sheath: PE (Polyethylene); UV resistant
- Outer sheath diameter (nominal): 0.50 mm nominal
- Outer sheath color: Black (RAL 9005)
- Mechanical properties:
- Tensile loading: 150N max.
- Dynamic bending radius: 8x AD mm min.
- Static bending radius: 4x AD mm min.
- Shipping- and storage temperature range: -20 °C up to +60 °C

- Operating temperature range: -50 °C up to +60 °C
- Installation temperature range: 0 °C up to +60 °C
- Overall diameter Simplex (nominal): 8.5 mm nominal (Eca)
- Weight (kg/km): 66.5 kg/km
- Electrical properties:
- Impedance: 100±5 Ohm @ 4-100 MHz; 100±25 Ohm @ 100-1200 MHz
- Capacitance: 45 pF/m nominal @ 1 KHz
- Capacitance unbalance (pair-ground): 1.6 pF/m max. @ 1 KHz
- Insulation resistance: 5 GOhm x km min.
- DC resistance: 95 Ohm/km max. (2% max. resistance unbalance)
- DC loop resistance: 190 Ohm/km max. (2% max. resistance unbalance)
- Voltage resistance: 72 Vdc max.
- Coupling attenuation: CA-Type 1b
- Signal propagation delay: 450 nS/100 m max.
- Delay difference: 10 nS/100 m max.
- Separating class: "d" acc. to EN 50174-2
- NVP: 79%
- Assortment: Twisted Pair Installation Cables
- Category: CAT 7
- Shielding: S-FTP, pairs in metal foil and braid shielding
- CPR: Eca
- Length: 500 m
- Color: black
- Jacket: PE
- Structure: 4 x 2 AWG 23/1, solid twisted pair

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	1	0.00	0.00	0.00	0.00	0.00
Packaging Unit Inside	0	0.00	0.00	0.00	0.00	0.00
Packaging Unit Single	1	34.00	0.00	0.00	0.00	0.00
Net single without Packaging	0	27.00	0.00	0.00	0.00	0.00

More images:

DIGITUS

AWG 23/1 | 1200 MHz | 10 Gbit Ethernet | CAT 7 | 1000 Mbps

ISO 9001:2015 | ISO 14001:2015 | ISO 45001:2018

LSZH | Ecod | CPR class

CAT 7 S/FTP Burial Installation Cable, 500m, Simplex, PE

DIGITUS

DK-1741-VH-S-OD // CAT 7 S/FTP Burial Installation Cable, 500m, Simplex, PE

Anwendungsbeispiel
Example of use

DK-0325

DIGITUS

DK-1741-VH-S-OD // CAT 7 S/FTP Burial Installation Cable, 500m, Simplex, PE

Kabelquerschnitt
Cable cross section

Adressierung Outer jacket | Adressierung Isolation | Adressierung Co-Steel Conductors | Adressierung Shield jacket | Adressierung Purecopper Purecopper

DIGITUS

Produktionsmerkmale Product Information	Physikalische Eigenschaften Physical Properties
Hersteller: DIGITUS Produktname: CAT 7 S/FTP Burial Installation Cable, 500m, Simplex, PE Artikelnummer: DK-1741-VH-S-OD	Typ: CAT 7 S/FTP Burial Installation Cable, 500m, Simplex, PE Material: PE Farbe: Schwarz Abmessungen: 12,5 mm x 12,5 mm x 12,5 mm Gewicht: 1,2 kg/100m Temperaturbereich: -30°C bis +60°C Flammverhalten: LSZH CE-Kennzeichnung: Ecod, CPR class

DIGITUS

Technische Eigenschaften Technical Properties
Zertifikat: GHMT Normen: EN 50173-11, EN 50173-12, EN 50173-13, EN 50173-14, EN 50173-15, EN 50173-16, EN 50173-17, EN 50173-18, EN 50173-19, EN 50173-20, EN 50173-21, EN 50173-22, EN 50173-23, EN 50173-24, EN 50173-25, EN 50173-26, EN 50173-27, EN 50173-28, EN 50173-29, EN 50173-30, EN 50173-31, EN 50173-32, EN 50173-33, EN 50173-34, EN 50173-35, EN 50173-36, EN 50173-37, EN 50173-38, EN 50173-39, EN 50173-40, EN 50173-41, EN 50173-42, EN 50173-43, EN 50173-44, EN 50173-45, EN 50173-46, EN 50173-47, EN 50173-48, EN 50173-49, EN 50173-50, EN 50173-51, EN 50173-52, EN 50173-53, EN 50173-54, EN 50173-55, EN 50173-56, EN 50173-57, EN 50173-58, EN 50173-59, EN 50173-60, EN 50173-61, EN 50173-62, EN 50173-63, EN 50173-64, EN 50173-65, EN 50173-66, EN 50173-67, EN 50173-68, EN 50173-69, EN 50173-70, EN 50173-71, EN 50173-72, EN 50173-73, EN 50173-74, EN 50173-75, EN 50173-76, EN 50173-77, EN 50173-78, EN 50173-79, EN 50173-80, EN 50173-81, EN 50173-82, EN 50173-83, EN 50173-84, EN 50173-85, EN 50173-86, EN 50173-87, EN 50173-88, EN 50173-89, EN 50173-90, EN 50173-91, EN 50173-92, EN 50173-93, EN 50173-94, EN 50173-95, EN 50173-96, EN 50173-97, EN 50173-98, EN 50173-99, EN 50173-100

DIGITUS

Zertifikat
No. 010173-21

Kategorie 7

Technische Daten, Klasse Kategorie 7
GHMT Type Approval

DIGITUS

CE-Kennzeichnung	RoHS-Kennzeichnung	REACH-Kennzeichnung	WEEE-Kennzeichnung	UL-Kennzeichnung	UL-Kennzeichnung
B2+	RoHS	REACH	WEEE	UL	UL

