

DIGITUS Cat.6A U/UTP installation cable, 500 m, simplex, Dca

DK-1614-A-VH-5
EAN 4016032441885



CAT 6A U-UTP installation cable, 500 MHz Dca (EN 50575), AWG 23/1, 500 m drum, sx, blue

DIGITUS® Category 6A U-UTP installation cables are manufactured and tested to the ISO/IEC 11801, TIA/586-C.2 and EN 50173 Category 6A specifications. Every cord consists of 8 color coded AWG 23 polyethylene insulated conductors. The conductors are twisted together to form 4 pairs with varying lay lengths. Printing details along the outer sheath includes the brand name and item code. The cable is packed in a paper pullout box which makes the installation easy.

Future-oriented standards and high-end quality for your network.






- Physical properties:
- Conductor: Bare annealed copper, solid AWG 23/1
- Insulation: HD-PE (High Density Polyethylene)
- Total number of insulated conductors: 8, twisted in 4 pairs
- Color code: Blue-white, orange-white, green-white, brown-white
- Individual pair shield: None
- Overall shielding: None
- Outer sheath: Dca to B2ca acc. to EN 50575; LSZH
- Outer sheath diameter (nominal): 0,5 mm (Eca); 0,6 mm (Dca); 1,2 mm (Cca); 1,4 mm (B2ca)
- Outer sheath color: Light blue (RAL 5012)
- Mechanical properties:
- Tensile loading: 150N max.
- Dynamic bending radius: 8x AD mm min.
- Static bending radius: 4x AD mm min.

- Shipping- and storage temperature range: -20 °C up to +60 °C
- Operating temperature range: -20 °C up to +75 °C
- Installation temperature range: 0 °C up to +50 °C
- Overall diameter Simplex (nominal): 7,1 mm (Eca); 7,3 mm (Dca); 7,4 mm (Cca); 7,6 mm (B2ca)
- Weight (kg/km): 53 kg (Eca); 54 kg (Dca); 55 kg (Cca); 56 kg (B2ca)
- Electrical properties:
- Impedance: 100±50Ω @ 1 - 600MHz
- Capacitance: 40 pF/m nominal @ 1 KHz
- Capacitance unbalance (pair-ground): 1.6 pF/m max. @ 1 KHz
- Insulation resistance: 5 GΩm x km min.
- DC loop resistance: 147 Ωm/km max. (2% max. resistance unbalance)
- Voltage resistance: 72 Vdc max.
- Coupling attenuation: CA-Type 2
- Signal propagation delay: 450 nS/100 m max.
- Propagation delay: 10 nS/100 m max.
- Separating class: "c" acc. to EN 50174-2
- NVP: 70%
- Category: CAT 6A
- Shielding: U-UTP, unshielded
- CPR: Dca
- Length: 500 m
- Color: light-blue
- Jacket: LSOH
- Structure: 4 x 2 AWG 23/1, solid twisted pair

Logistics


	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	1	27.50	50.00	50.00	22.00	55.00
Packaging Unit Inside	1	27.50	50.00	50.00	22.00	55.00
Packaging Unit Single	25	27.50	50.00	50.00	22.00	55.00
Net single without Packaging	0	27.50	0.00	0.00	0.00	0.00

More images:

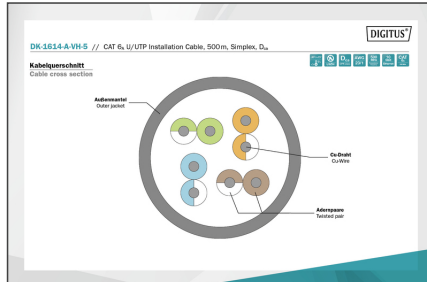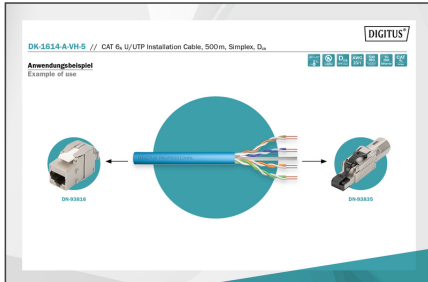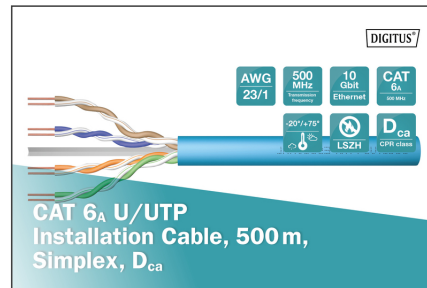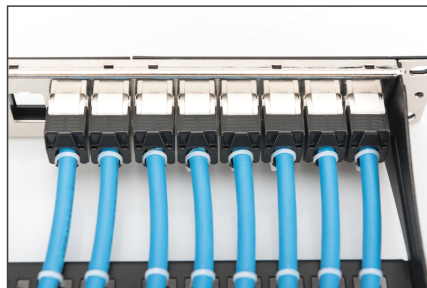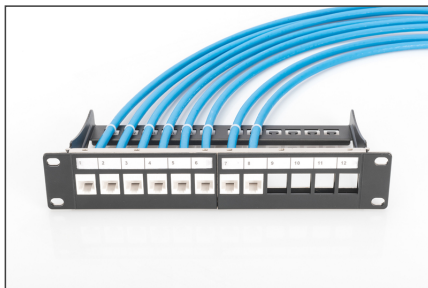

Produktdaten Product Information		Physikalische Spezifikationen Physical Properties	
Bezeichnung Name	DK-1614-A-VH-S	Hersteller Manufacturer	Digitus
Artikelnummer Part number	DK-1614-A-VH-S	Material Material	Plastic
Hersteller Manufacturer	Digitus	Material Material	Plastic
Hersteller Manufacturer	Digitus	Material Material	Plastic
Hersteller Manufacturer	Digitus	Material Material	Plastic
Hersteller Manufacturer	Digitus	Material Material	Plastic
Hersteller Manufacturer	Digitus	Material Material	Plastic
Hersteller Manufacturer	Digitus	Material Material	Plastic
Hersteller Manufacturer	Digitus	Material Material	Plastic
Hersteller Manufacturer	Digitus	Material Material	Plastic

Leistungseigenschaften Transmission Properties	
Parameter	Value
Frequency	500 MHz
Bandwidth	10 Gbit/s
Attenuation	20 dB/100m
Return Loss	15 dB
Insertion Loss	0.5 dB
Reflection Coefficient	-15 dB
Shielding Effectiveness	100 dB
Flame Retardancy	LSZH
Temperature Range	-40°C to +75°C
Humidity	95% RH

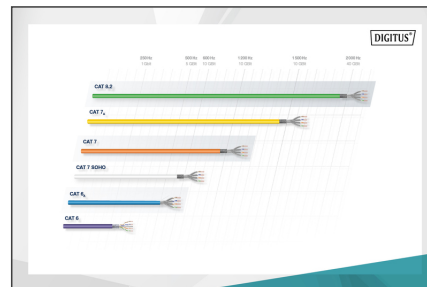

Cable Properties	
Category	Cat 6a
Shielding	Simplex
Length	500m
Material	LSZH
Temperature	-40°C to +75°C
Humidity	95% RH

