


DIGITUS Cat.6 F/UTP installation cable, 305 m, simplex, Dca

DK-1624-VH-305
EAN 4016032441991

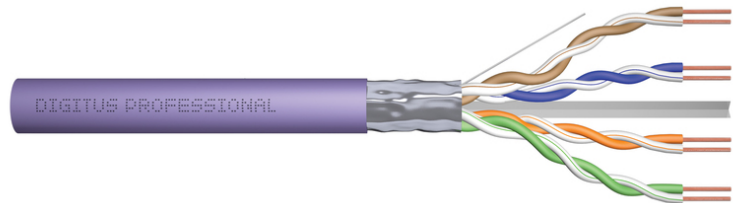

CAT 6 F-UTP installation cable, 250 MHz, AWG 23/1 Dca (LSZH-1), 305 m, drum, simplex, purple

The Digitus® Professional Cat.6 F/UTP installation cable is characterized by the following cable construction 4x2x AWG23/1 and reaches a transmission frequency up to 250 MHz. The halogen free cable jacket is conform to the standard IEC 60332-1, FRNC-B, LSZH-1 and CPR Euro class Dca. The cable is suitable for building structured cabling in the secondary and tertiary area. Compliant with the following standards ISO/IEC 11801, DIN EN 50173, DIN EN 50288-5-1.



Future-oriented standards and high-end quality for your network.

- Physical properties:
- Conductor: Bare annealed copper, solid AWG 23/1
- Insulation: HD-PE (High Density Polyethylene)
- Total number of insulated conductors: 8, twisted in 4 pairs
- Color code: Blue-white, orange-white, green-white, brown-white
- Individual pair shield: None
- Overall shielding: Aluminum foil, providing 100% coverage, drain wire
- Outer sheath: Eca to B2ca acc. to EN 50575; LSZH
- Outer sheath diameter (nominal): 0.5 mm (Eca); 0,6 mm (Dca); 0,8 mm (Cca); 0,08 mm (B2ca)
- Outer sheath color: Purple
- Mechanical properties:
- Tensile loading: 150N max.
- Dynamic bending radius: 8x AD mm min.
- Static bending radius: 4x AD mm min.

- Shipping- and storage temperature range: -20 °C up to +60 °C
- Operating temperature range: -20 °C up to +75 °C
- Installation temperature range: 0 °C up to +50 °C
- Overall diameter Simplex (nominal): 7.0 (Eca); 7,2 mm (Dca); 7,6 mm (Cca); 7,6 mm (B2ca)
- Weight (kg/km): 46 kg (Eca); 47 kg (Dca); 48,5 kg (Cca); 48,5 kg (B2ca)
- Electrical properties:
- Impedance: 100±5 Ohm @ 1-250 MHz
- Capacitance: 45 pF/m nominal @ 800 Hz
- Capacitance unbalance (pair-ground): 1.5 pF/m max. @ 1 KHz
- Insulation resistance: 5 GOhm x km min.
- DC loop resistance: 147 Ohm/km max. (2% max. resistance unbalance)
- Voltage resistance: 72 Vdc max.
- Coupling attenuation: 40 dB
- Signal propagation delay: 535 nS/100 m max.
- Propagation delay: 20 nS/100 m max.
- Separating class: „c“ acc. to EN 50174-2
- NVP: 69%
- Assortment: Twisted Pair Installation Cables
- Category: CAT 6
- Shielding: F-UTP, foil shielding
- CPR: Dca
- Length: 305 m
- Color: violet
- Jacket: LSOH
- Structure: 4 x 2 AWG 23/1, solid twisted pair

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	1	19.00	39.50	38.00	27.50	41,277.50
Packaging Unit Inside	1	19.00	39.50	38.00	27.50	41,277.50
Packaging Unit Single	1	19.00	39.50	38.00	27.50	41,277.50
Net single without Packaging	0	18.82	0.00	0.00	0.00	0.00

More images:

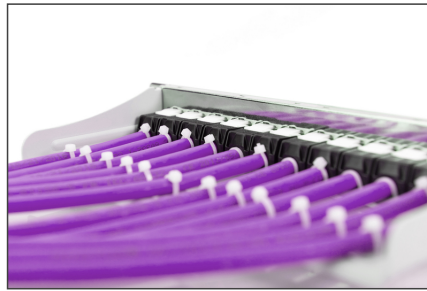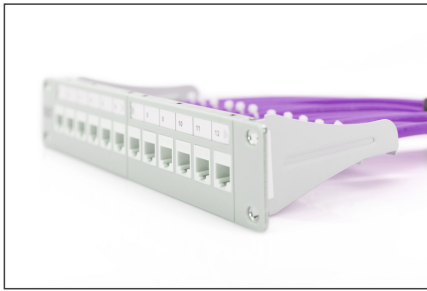

DK-1624-VH-305 // CAT 6 F/UTP Installation Cable, 305m, Simplex, D_{ca}

Anwendungsbereich
Example of use

DK-1624-VH-305 // CAT 6 F/UTP Installation Cable, 305m, Simplex, D_{ca}

Kabelquerschnitt
Cable cross section

Produktinformationen Product Information

Hersteller Hersteller-Adresse Hersteller-Telefon Hersteller-Webseite Hersteller-Email Hersteller-Webseite Hersteller-Email	Hersteller Hersteller-Adresse Hersteller-Telefon Hersteller-Webseite Hersteller-Email Hersteller-Webseite Hersteller-Email
--	--

Technische Spezifikationen Physical Properties

Leiter Leiterschicht Leiterschichtdicke Leiterschichtdicke Leiterschichtdicke Leiterschichtdicke Leiterschichtdicke	Leiter Leiterschicht Leiterschichtdicke Leiterschichtdicke Leiterschichtdicke Leiterschichtdicke Leiterschichtdicke
---	---


Leitungsgruppen Transmission Properties

AWG	AWG	AWG	AWG	AWG	AWG	AWG	AWG	AWG	AWG
1	24	24	24	24	24	24	24	24	24
1	14	14	14	14	14	14	14	14	14
10	14	14	14	14	14	14	14	14	14
16	16	16	16	16	16	16	16	16	16
20	20	20	20	20	20	20	20	20	20
24	24	24	24	24	24	24	24	24	24
28	28	28	28	28	28	28	28	28	28

CE **CE**

ASBAMANN

ASBAMANN

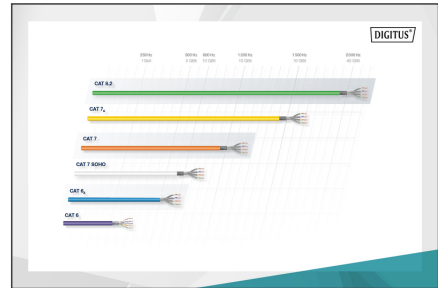

CE **CE**

ASBAMANN

ASBAMANN

