


DIGITUS USB M.2 hard disk enclosure, SSD, external, NVMe , 10Gbps, USB 3.1 Gen2, aluminum, toolfree

DA-71120-1
EAN 4016032497578

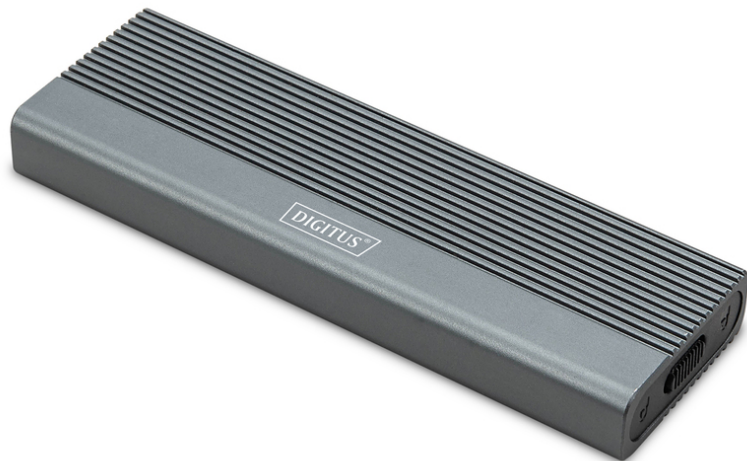

USB hard disk enclosure, external, NVMe 10Gbps ,USB3.1 Gen2,alu,toolfree

The DA-71120-1 M.2 NVMe SSD enclosure offers a powerful and versatile storage solution for all your data needs. It supports M.2 modules in 2230, 2242, 2260 and 2280 formats and is compatible with a wide range of SSDs. With a capacity of up to 8 TB, it offers enough space for all your files and data. Thanks to the fast data transfer rate of 10 Gbps and the USB 3.1 Gen 2 interface, which is backwards compatible with USB 3.1, 3.0, 2.0 and 1.1, you can enjoy fast file transfers and smooth performance. The plug-and-play design allows for easy installation without complicated settings. The robust JMS583 chipset ensures reliable and efficient NVMe performance, while the integrated LED indicator allows easy monitoring of SSD status. The durable and stylish aluminum housing in Pantone 430C provides excellent passive heat dissipation. With compact dimensions of 101x32x10 mm and a weight of only 97 g, the housing is ideal for mobile use and compatible with Windows, macOS, Linux, Google Chrome OS, Android and iOS.

The DA-71120-1 M.2 NVMe SSD enclosure will become your preferred solution for high capacity, high speed storage. This elegant, tool-less enclosure supports mini SSDs in M.2 B+M key format.

- Supported Mini SSD in format: M.2, B+M Key(NVMe)
- Supported storage technology: NVMe
- Max. supported capacity: 8TB
- Installation method: tool-free



- Data transfer rate: 10 Gbit/s
- Supports M.2 modules in the format:2230,2242,2260,2280
- Supported keys: M Key, B+M Key (NVMe)
- USB standard: USB 3.1 Gen2
- Backwards compatible with USB: 3.1/ 3.0 / 2.0 / 1.1
- Chipset: JMS583
- LED activity indicator:yes
- Housing: Aluminum
- Heat dissipation: passive
- Supports Plug & Play
- Power supply via USB connection
- Supports Win 11,10, 8, 7
- Supports: Android / iOS
- Supports macOS , Linux 2.4.x or higher, Google Chrome OS 9.x or higher
- Operating temperature: 5 to 50°C
- Storage temperature: -40 to 70°C
- Humidity during operation: 5 to 90% (non-condensed)
- Dimensions: 101x32x10 mm
- Weight: 97g
- Color: Pantone 430C
- USB-C products: yes

Package contents

- External SSD enclosure, M.2 - USB Type-C™
- USB cable (C - A), 25 cm
- USB A to C adapter
- QIG

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	50	0.00	0.00	0.00	0.00	0.00
Packaging Unit Inside	0	0.00	0.00	0.00	0.00	0.00
Packaging Unit Single	1	0.10	0.00	0.00	0.00	0.00
Net single without Packaging	0	0.16	0.00	0.00	0.00	0.00

More images:

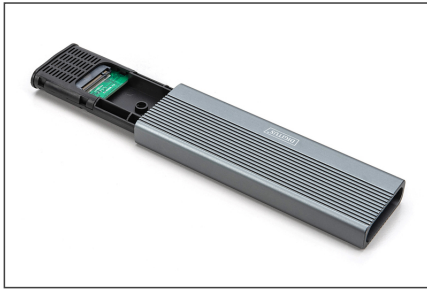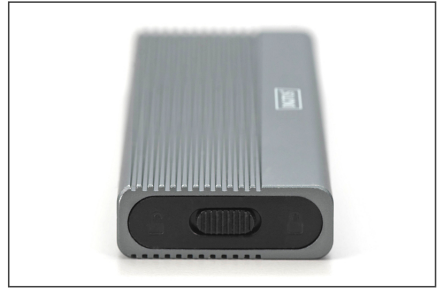

DA-71120-1
USB Hard Disk Enclosure, External, NVMe, 10 Gbps
USB 3.1 Gen2, Alu, Toolfree

USB Icon
 USB 11.1
 Plug and Play
 10 Gbps
 Data Transfer Rate
 Toolfree
 Operating Temperature

USB-C
 USB-A

DA-71120-1
USB Hard Disk Enclosure, External, NVMe, 10 Gbps
USB 3.1 Gen2, Alu, Toolfree

Wide compatibility: Supports M.2 modules in 2280, 2242, 2260 and 2280 formats, compatible with a wide range of SSDs.

M.2 2280
 M.2 2242
 M.2 2260
 M.2 2280

M.2 to SATA

DA-71120-1
USB Hard Disk Enclosure, External, NVMe, 10 Gbps
USB 3.1 Gen2, Alu, Toolfree

Housing
Aluminum

Max. supported capacity
8TB

DA-71120-1
USB Hard Disk Enclosure, External, NVMe, 10 Gbps
USB 3.1 Gen2, Alu, Toolfree

1. Slide the push button and pull out the back flap.
2. Remove the back mounting bracket. Put the back flap into the back panel.
3. The edge of the back bracket is aligned by 90°.
4. Plug the interlocking pins into the back flap and the upper hole.

No Hotplug

DA-71120-1
USB Hard Disk Enclosure, External, NVMe, 10 Gbps
USB 3.1 Gen2, Alu, Toolfree

USB Icon
 USB 11.1
 Plug and Play
 10 Gbps
 Data Transfer Rate
 Toolfree
 Operating Temperature

Windows 10
 Mac OS
 Linux
 Android

10 Gbps

Compatibility with Windows 1.0, OS 11, macOS, Linux 6.4 or higher, Android OS 8.0 or higher.

DA-71120-1
USB Hard Disk Enclosure, External, NVMe, 10 Gbps
USB 3.1 Gen2, Alu, Toolfree

USB Icon
 USB 11.1
 Plug and Play
 10 Gbps
 Data Transfer Rate
 Toolfree
 Operating Temperature

Laptop
 Phone
 Network
 Tablet

