


PURELINK ULS1000 - HDMI cable with Ultra-Lock System™

ULS1000-050
EAN 4260134125536

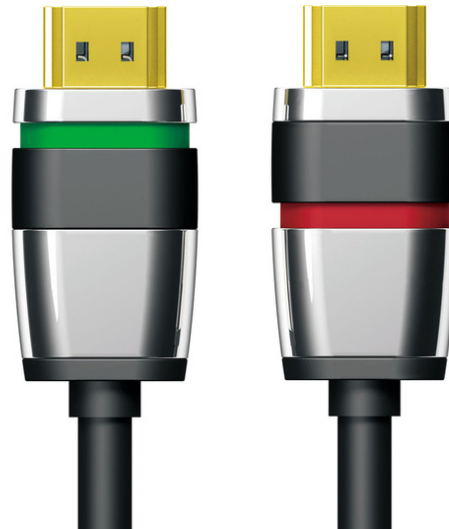

The ultimate connection is now even better! The ULS1000 Locking HDMI Cable our Ultimate series with the patented Ultra-Lock™ safety lock complies with the latest HDMI 2.0 standard and with its 360° locking switch an easy-to-use system for all HDMI connections. The high-purity, triple shielded OFC copper cable and the 24-carat gold-plated contacts underline its ultimate quality. Of course, also the audio return channel and an Ethernet cable (HEAC) included. connections plug material Plastic / metal Contact material 24 carat gold-plated shielding Yes connection 1 HDMI type A connector (19pin) incl. ULS™ connection 2 HDMI type A connector (19pin) incl. ULS™ contacts 24 carat gold-plated, durable design Electric wire Type round cable length 0.5 m | 1.0 m | 1.5 m | 2.0m | 3,0m | 5.0 m | 7.5 m | 10,0m Inner conductor material High-purity copper OFC number of shieldings 3 times screening 1 Aluminum foil (100% leak) shielding 2 Aluminum foil (100% leak) shielding 3 Braid (100% leak) Material outer sheath Highly elastic PVC Outer sheath diameter 6 mm signal transmission Supported standards HDMI transmission modes Digital

audio and video signals Max. Bandwidth 340 MHz Transmission rate max. To 3m cable length: 18 Gbps over 5m cable: 10.2 Gbps Resolution max. 4K (4096x2160) @ 60Hz Supported color spaces 16/24 bit RGB / YUV, Deep Color, xvColor™ Supported audio standards Audio Return Channel (ARC), Dolby Digital Plus, Dolby TrueHD, DTS-HD Master Audio™, DVD Audio, SA-CD More standards HDMI Ethernet Channel (HEC), 3D, HDCP, CEC, 4K2K (2160i / p), full HD (1080i / p), HD ready (720i / p), SDTV (480i / p)

- High Speed HDMI to 4K for 3D and HDTV resolutions (2160p)
- Integrated Ethernet channel for 100 Mbit transmission via HDMI
- High-purity silver-plated OFC copper wire and 3-fold shielding
- Patented 360° locking switch system: Ultra-Lock System™
- World's first ATC certification

Attributes

- AOC - Active Optical Cable: no

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	28	7.56	0.00	0.00	0.00	0.00
Packaging Unit Inside	1	0.27	0.00	0.00	0.00	0.00
Packaging Unit Single	1	0.27	0.00	0.00	0.00	0.00
Net single without Packaging	0	0.00	0.00	0.00	0.00	0.00

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

Bachmann GmbH
Ernstthaldenstr. 33
Stuttgart, Germany
<https://www.bachmann.com/de/>
info@bachmann.com