

DIGITUS mini GBIC (SFP) Module, 10Gbps, 0.3km, with DDM Feature

DN-81200
EAN 4016032324133



10G SFP+ Module, Multimode, DDM LC Duplex Connector, 850nm, up to 300m

The DIGITUS® mini GBIC (SFP) transceiver modules offer highest quality and reliability. Whether from switch to switch, converter to switch, converter to converter or any else application: The wide product range of DIGITUS® modules makes possible a flexible usage of the fiber technology. The conformity to the MSA (Multi Source Agreement) standard ensures a compatibility to third party manufacturers.

The plug and play fiber connection

- Mini GBIC SFP (Small Form Factor Pluggable) module
- Compatible with the following manufacturers: Allied Telesis, Allnet, Avaya, CISCO, D-Link, Edimax, FINISAR, FORCE 10, Gigamon, Intellinet, KTI Networks, Level One, PLANET, Tenda, TP-Link, TRENDnet, Mikrotik, ENTERASYS, RIVERSTONE, Unifi, Ubiquiti, ZyXEL, ZTE
- Supports DDM (Digital Diagnostic Monitoring)
- High quality and excellent reliability
- 10 Gbps Maximum Data Rate
- Compliant to IEEE802.3ae 10 Gigabit Standard
- Class 1 laser product compliant with EN 60825-1
- Easy plug-and-play installation

- MSA (Multi Source Agreement) compliant
- Hot pluggable
- Connector: 1x LC Duplex
- Wavelength: 850nm
- Transmission Power: Minimum -5 dBm, Maximum -1 dBm
- Empfangssensitivität: Minimum -11,5 dBm
- For a distance of up to 0.3km
- Safe fast-locking mechanism
- 3.3V power supply
- Operating temperature: 0 °C ~ 70 °C

Attributes


- Mode: Multimode
- Connector: LC
- Distance (km): 0.3
- Wavelength: 850 nm
- DDM Support: yes
- Broadcasting Mode: Unidirectional
- Manufacturer compatibility: Cisco
- Ethernet speed: 10 Gigabit

Package contents

- SFP module

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	20	0.80	41.00	26.00	16.00	17,056.00
Packaging Unit Inside	1	0.04	3.00	11.50	9.00	310.50
Packaging Unit Single	1	0.04	3.00	11.50	9.00	310.50
Net single without Packaging	0	0.03	5.50	1.20	0.80	5.28

More images:

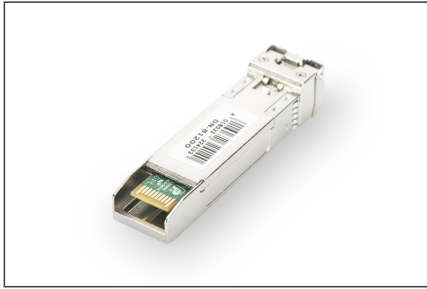

SFP Modules

Part Number	SKU Code	Speed	Distance	Connector	Mounting	Operating Temperature	Additional Notes
DA-PA01	401000000001	10 Gbps	10 km	LC Duplex Plastic	19mm	-40 to 75 °C	
DA-PA02	401000000002	10 Gbps	300m	LC Duplex Plastic	19mm	-40 to 75 °C	
DA-PA03	401000000003	10 Gbps	300m	LC Duplex Plastic	19mm	-40 to 75 °C	
DA-PA04	401000000004	10 Gbps	300m	LC Duplex Plastic	19mm	-40 to 75 °C	
DA-PA05	401000000005	10 Gbps	300m	LC Duplex Plastic	19mm	-40 to 75 °C	
DA-PA06	401000000006	10 Gbps	300m	LC Duplex Plastic	19mm	-40 to 75 °C	
DA-PA07	401000000007	10 Gbps	300m	LC Duplex Plastic	19mm	-40 to 75 °C	
DA-PA08	401000000008	10 Gbps	300m	LC Duplex Plastic	19mm	-40 to 75 °C	
DA-PA09	401000000009	10 Gbps	300m	LC Duplex Plastic	19mm	-40 to 75 °C	
DA-PA10	401000000010	10 Gbps	300m	LC Duplex Plastic	19mm	-40 to 75 °C	
DA-PA11	401000000011	10 Gbps	300m	LC Duplex Plastic	19mm	-40 to 75 °C	
DA-PA12	401000000012	10 Gbps	300m	LC Duplex Plastic	19mm	-40 to 75 °C	
DA-PA13	401000000013	10 Gbps	300m	LC Duplex Plastic	19mm	-40 to 75 °C	
DA-PA14	401000000014	10 Gbps	300m	LC Duplex Plastic	19mm	-40 to 75 °C	
DA-PA15	401000000015	10 Gbps	300m	LC Duplex Plastic	19mm	-40 to 75 °C	
DA-PA16	401000000016	10 Gbps	300m	LC Duplex Plastic	19mm	-40 to 75 °C	
DA-PA17	401000000017	10 Gbps	300m	LC Duplex Plastic	19mm	-40 to 75 °C	
DA-PA18	401000000018	10 Gbps	300m	LC Duplex Plastic	19mm	-40 to 75 °C	
DA-PA19	401000000019	10 Gbps	300m	LC Duplex Plastic	19mm	-40 to 75 °C	
DA-PA20	401000000020	10 Gbps	300m	LC Duplex Plastic	19mm	-40 to 75 °C	
DA-PA21	401000000021	10 Gbps	300m	LC Duplex Plastic	19mm	-40 to 75 °C	
DA-PA22	401000000022	10 Gbps	300m	LC Duplex Plastic	19mm	-40 to 75 °C	
DA-PA23	401000000023	10 Gbps	300m	LC Duplex Plastic	19mm	-40 to 75 °C	
DA-PA24	401000000024	10 Gbps	300m	LC Duplex Plastic	19mm	-40 to 75 °C	
DA-PA25	401000000025	10 Gbps	300m	LC Duplex Plastic	19mm	-40 to 75 °C	
DA-PA26	401000000026	10 Gbps	300m	LC Duplex Plastic	19mm	-40 to 75 °C	
DA-PA27	401000000027	10 Gbps	300m	LC Duplex Plastic	19mm	-40 to 75 °C	
DA-PA28	401000000028	10 Gbps	300m	LC Duplex Plastic	19mm	-40 to 75 °C	
DA-PA29	401000000029	10 Gbps	300m	LC Duplex Plastic	19mm	-40 to 75 °C	
DA-PA30	401000000030	10 Gbps	300m	LC Duplex Plastic	19mm	-40 to 75 °C	
DA-PA31	401000000031	10 Gbps	300m	LC Duplex Plastic	19mm	-40 to 75 °C	
DA-PA32	401000000032	10 Gbps	300m	LC Duplex Plastic	19mm	-40 to 75 °C	
DA-PA33	401000000033	10 Gbps	300m	LC Duplex Plastic	19mm	-40 to 75 °C	
DA-PA34	401000000034	10 Gbps	300m	LC Duplex Plastic	19mm	-40 to 75 °C	
DA-PA35	401000000035	10 Gbps	300m	LC Duplex Plastic	19mm	-40 to 75 °C	
DA-PA36	401000000036	10 Gbps	300m	LC Duplex Plastic	19mm	-40 to 75 °C	
DA-PA37	401000000037	10 Gbps	300m	LC Duplex Plastic	19mm	-40 to 75 °C	
DA-PA38	401000000038	10 Gbps	300m	LC Duplex Plastic	19mm	-40 to 75 °C	
DA-PA39	401000000039	10 Gbps	300m	LC Duplex Plastic	19mm	-40 to 75 °C	
DA-PA40	401000000040	10 Gbps	300m	LC Duplex Plastic	19mm	-40 to 75 °C	
DA-PA41	401000000041	10 Gbps	300m	LC Duplex Plastic	19mm	-40 to 75 °C	
DA-PA42	401000000042	10 Gbps	300m	LC Duplex Plastic	19mm	-40 to 75 °C	
DA-PA43	401000000043	10 Gbps	300m	LC Duplex Plastic	19mm	-40 to 75 °C	
DA-PA44	401000000044	10 Gbps	300m	LC Duplex Plastic	19mm	-40 to 75 °C	
DA-PA45	401000000045	10 Gbps	300m	LC Duplex Plastic	19mm	-40 to 75 °C	
DA-PA46	401000000046	10 Gbps	300m	LC Duplex Plastic	19mm	-40 to 75 °C	
DA-PA47	401000000047	10 Gbps	300m	LC Duplex Plastic	19mm	-40 to 75 °C	
DA-PA48	401000000048	10 Gbps	300m	LC Duplex Plastic	19mm	-40 to 75 °C	
DA-PA49	401000000049	10 Gbps	300m	LC Duplex Plastic	19mm	-40 to 75 °C	
DA-PA50	401000000050	10 Gbps	300m	LC Duplex Plastic	19mm	-40 to 75 °C	

