


# DIGITUS CAT 6A U-FTP patch cord, Cu, PVC AWG 30/7, length 3 m, color Black

DK-1644-A-030F/BL  
 EAN 4016032348412

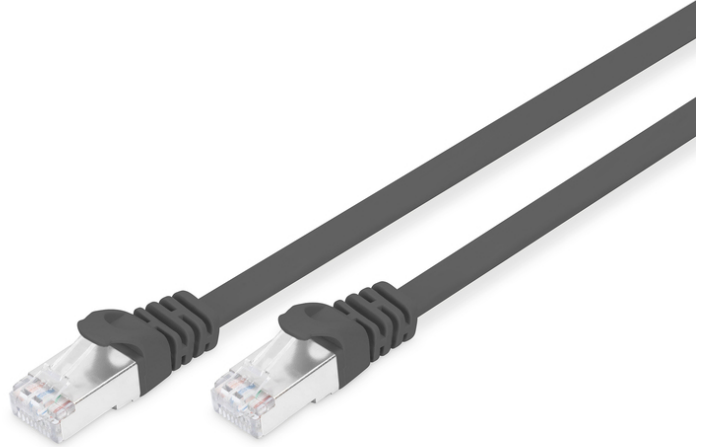

**CAT 6A U-FTP flat patch cable, PVC, Cu AWG 30, Length 3m, color black**

The DIGITUS® Category 6A Class EA patch cords are manufactured and tested to the ISO/IEC 11801 and DIN EN 50173 Category 6 A specifications. They will guarantee the installed cabling system is compliant with the ISO & EN channel specification requirements and will provide optimum performance levels of DIGITUS® Category 6A cabling. The performance is tested up to 500 MHz inclusive performance characteristics such as near end cross talk ("NEXT"). DIGITUS® patch cords are designed and produced to fulfill the highest requirements of various application areas in full volume. Each cable is fitted with a molded boot which comes with kink protection and strain relief. Furthermore the boot is equipped with a latch protection that prevents the latching lever against breaking. You can easily identify the Category 6A, because of the transparent yellow colored connector.

**Future-oriented standards and high-end quality for your network.**

- 2x RJ45 (8P8C) connectors

- Boots with kink protection, strain relief and latch protection
- Length marking on boot
- Conductor: Copper (Cu)
- Assortment: Twisted Pair Patch Cables
- Flat Version: YES
- Length: 3 m
- Connector 1: Modular RJ45 (8/8) plug
- Connector 2: Modular RJ45 (8/8) plug
- Category: CAT 6A
- Packaging: DIGITUS Polybag
- Color: Black
- Configuration: 1:1
- Jacket: PVC
- Shielding: S-FTP, pairs in metal foil and braid shielding
- Structure: 4 x 2 AWG 30/7, twisted pair
- Category: CAT 6A
- Slim Version: yes
- Flat Version: yes

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm <sup>3</sup>
Packaging Unit Carton	100	8.40	48.00	28.00	26.00	34,944.00
Packaging Unit Inside	10	0.84	10.00	28.00	31.00	8,680.00
Packaging Unit Single	1	0.08	2.00	16.00	25.50	816.00
Net single without Packaging	0	0.00	0.00	0.00	0.00	0.00

**More images:**

