


# DIGITUS CAT 8.2 S/FTP installation cable, 500 m, Simplex, Dca-s2,d1,a1

DK-1843-VH-5  
EAN 4016032380542

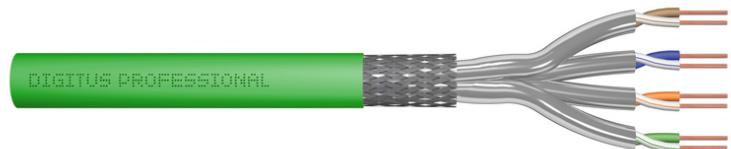

### CAT 8.2 S-FTP installation cable, 2000 MHz, AWG 22/1 Dca, 500 m, drum, simplex, grün

The Digitus Cat 8.2 S/FTP installation cable is designed for use in the structured data center and the building cabling according to ISO/IEC 11801, DIN EN 50288-12-1, DIN EN 50173, IEC 60332-3-24. The cable is perfectly suitable for the transmission of both analog and digital data and also supports POE. The shielding structure is composed of single shielded pairs with a tinned copper braid, which ensures excellent shielding and electrical values.

#### Future-oriented standards and high-end quality for your network

- Physical properties:
- Conductor: Bare copper wire, AWG 22/1
- System(s) of assessment and verification of constancy of performance: System 3
- Insulation: SFS-PE (foamed polyethylene jacket)
- Total number of insulated conductors: 8, twisted into 4 pairs
- Color code: Blue-white, orange-white, green-white, brown-white
- Shielding of the individual pairs: Aluminum-laminated polyester film, covers 100%
- Overall shielding: Tinned copper braiding
- Outer sheath: Dca-s2,d1,a1 according to EN 50575
- Outer sheath thickness (nominal): 0.55 mm nominal
- Outer sheath color: Green
- Mechanical properties:
- Strain relief: 150N max.
- Dynamic bending radius: 8x AD mm min.
- Static bending radius: 4x AD mm min.
- Transport and storage temperature range: -20 °C to +75 °C



- Operating temperature range: -20 °C to +60 °C
- Installation temperature range: 0 °C to +50 °C
- Outer diameter simplex (nominal): 7.9 mm nominal (Dca)
- Weight (kg/km): 65 kg/km
- Electrical properties:
- Impedance: 100±15Ohm @ 1 - 2000MHz
- Capacitance: 99 pF/30m nominal @ 1 KHz
- Capacitance unbalance (pair-earth): 99pF/30m max. @ 1 KHz
- Insulation resistance: 5 GOhm x km min.
- DC resistance: 2.40hm/30m max. (4% max. unbalanced resistance)
- Loop resistance: 5.6 Ohm/24m max. (3% max. unbalanced resistance)
- Operating voltage: 72 Vdc max.
- Coupling attenuation: CA-Type 1
- Phase delay: 171 nS/30 m max.
- Time delay: 13.5 nS/130 m max.
- Separation class: "d" according to EN 50174-2
- NVP: 79%
- Assortment: Twisted Pair Installation Cables
- Category: CAT 8.2
- Shielding: S-FTP, pairs in metal foil and braid shielding
- CPR: Dca
- Length: 500 m
- Color: green
- Jacket: LSOH
- Structure: 4 x 2 AWG 22/1, solid twisted pair

#### Package contents

- CAT 8.2 S/FTP installation cable on drum, 500 m, Simplex, Dca

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	1	30.00	34.00	39.50	39.50	0.00
Packaging Unit Inside	1	30.00	34.00	39.50	39.50	0.00
Packaging Unit Single	1	30.00	34.00	39.50	39.50	0.00
Net single without Packaging	0	0.00	0.00	0.00	0.00	0.00

More images:

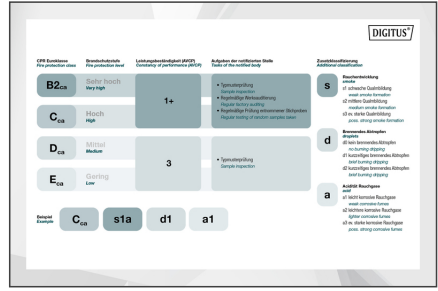
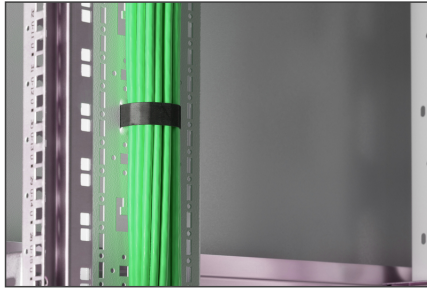


**DIGITUS**

AWG 22/1 2000 MHz 40 Gbit Ethernet CAT 8.2 2000 MHz

20°/40° LSZH Dca CPRI class

**CAT 8.2 S/FTP Installation Cable, 500m, Simplex, D<sub>ca</sub>**

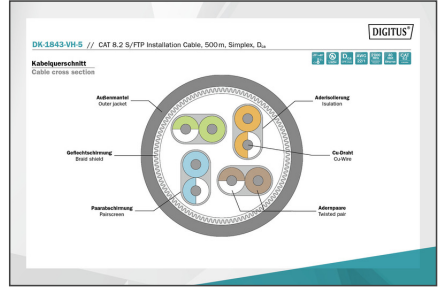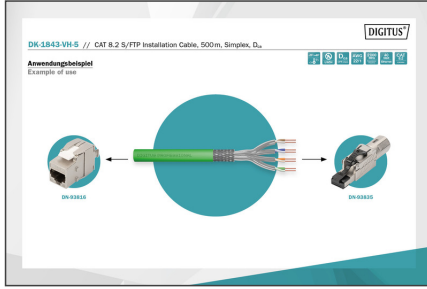

**DIGITUS**

Produktinformation Product Information	Physikalische Spezifikationen Physical Properties
<b>Bestellnummer</b> DK-1843-VH-S (500m) (1000m) DK-1843-VH-S (1000m) (1000m) DK-1843-VH-S (1000m) (1000m) DK-1843-VH-S (1000m) (1000m)	<b>Material</b> Polyester <b>Material</b> Polyester <b>Material</b> Polyester <b>Material</b> Polyester
<b>Bestellnummer</b> DK-1843-VH-S (500m) (1000m) DK-1843-VH-S (1000m) (1000m) DK-1843-VH-S (1000m) (1000m) DK-1843-VH-S (1000m) (1000m)	<b>Temperaturbereich</b> -20°C bis +60°C <b>Temperaturbereich</b> -20°C bis +60°C <b>Temperaturbereich</b> -20°C bis +60°C <b>Temperaturbereich</b> -20°C bis +60°C
<b>Bestellnummer</b> DK-1843-VH-S (500m) (1000m) DK-1843-VH-S (1000m) (1000m) DK-1843-VH-S (1000m) (1000m) DK-1843-VH-S (1000m) (1000m)	<b>Temperaturbereich</b> -20°C bis +60°C <b>Temperaturbereich</b> -20°C bis +60°C <b>Temperaturbereich</b> -20°C bis +60°C <b>Temperaturbereich</b> -20°C bis +60°C

**DIGITUS**

Leistungseigenschaften Transmission Properties

Strecke	100%	90%	80%	70%	60%	50%
1	1	1	1	1	1	1
2	1	1	1	1	1	1
3	1	1	1	1	1	1
4	1	1	1	1	1	1
5	1	1	1	1	1	1
6	1	1	1	1	1	1
7	1	1	1	1	1	1
8	1	1	1	1	1	1
9	1	1	1	1	1	1
10	1	1	1	1	1	1
11	1	1	1	1	1	1
12	1	1	1	1	1	1
13	1	1	1	1	1	1
14	1	1	1	1	1	1
15	1	1	1	1	1	1
16	1	1	1	1	1	1
17	1	1	1	1	1	1
18	1	1	1	1	1	1
19	1	1	1	1	1	1
20	1	1	1	1	1	1
21	1	1	1	1	1	1
22	1	1	1	1	1	1
23	1	1	1	1	1	1
24	1	1	1	1	1	1
25	1	1	1	1	1	1
26	1	1	1	1	1	1
27	1	1	1	1	1	1
28	1	1	1	1	1	1
29	1	1	1	1	1	1
30	1	1	1	1	1	1
31	1	1	1	1	1	1
32	1	1	1	1	1	1
33	1	1	1	1	1	1
34	1	1	1	1	1	1
35	1	1	1	1	1	1
36	1	1	1	1	1	1
37	1	1	1	1	1	1
38	1	1	1	1	1	1
39	1	1	1	1	1	1
40	1	1	1	1	1	1
41	1	1	1	1	1	1
42	1	1	1	1	1	1
43	1	1	1	1	1	1
44	1	1	1	1	1	1
45	1	1	1	1	1	1
46	1	1	1	1	1	1
47	1	1	1	1	1	1
48	1	1	1	1	1	1
49	1	1	1	1	1	1
50	1	1	1	1	1	1
51	1	1	1	1	1	1
52	1	1	1	1	1	1
53	1	1	1	1	1	1
54	1	1	1	1	1	1
55	1	1	1	1	1	1
56	1	1	1	1	1	1
57	1	1	1	1	1	1
58	1	1	1	1	1	1
59	1	1	1	1	1	1
60	1	1	1	1	1	1
61	1	1	1	1	1	1
62	1	1	1	1	1	1
63	1	1	1	1	1	1
64	1	1	1	1	1	1
65	1	1	1	1	1	1
66	1	1	1	1	1	1
67	1	1	1	1	1	1
68	1	1	1	1	1	1
69	1	1	1	1	1	1
70	1	1	1	1	1	1
71	1	1	1	1	1	1
72	1	1	1	1	1	1
73	1	1	1	1	1	1
74	1	1	1	1	1	1
75	1	1	1	1	1	1
76	1	1	1	1	1	1
77	1	1	1	1	1	1
78	1	1	1	1	1	1
79	1	1	1	1	1	1
80	1	1	1	1	1	1
81	1	1	1	1	1	1
82	1	1	1	1	1	1
83	1	1	1	1	1	1
84	1	1	1	1	1	1
85	1	1	1	1	1	1
86	1	1	1	1	1	1
87	1	1	1	1	1	1
88	1	1	1	1	1	1
89	1	1	1	1	1	1
90	1	1	1	1	1	1
91	1	1	1	1	1	1
92	1	1	1	1	1	1
93	1	1	1	1	1	1
94	1	1	1	1	1	1
95	1	1	1	1	1	1
96	1	1	1	1	1	1
97	1	1	1	1	1	1
98	1	1	1	1	1	1
99	1	1	1	1	1	1
100	1	1	1	1	1	1

