


DIGITUS Cat.7A S/FTP, installation cable, 500 m, duplex, Dca-s1a d1 a1

DK-1743-A-VH-D-5
EAN 4016032380610

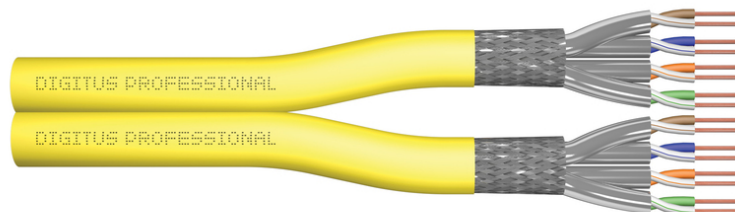

CAT 7A S-FTP installation cable, 1500 MHz Dca (EN 50575), AWG 22/1, 500 m drum, dx, yellow

The Digitus Cat 7 installation cable is designed for use in the structured data center and the building cabling according to ISO/IEC 11801, DIN EN 50288-4-1, DIN EN 50173, IEC 61156-7, EN 50288-9-1. The cable is perfectly suitable for the transmission of both analog and digital data and also supports POE and POE+. The shielding structure is composed of single shielded pairs with a tinned copper braid, which ensures excellent shielding and electrical values.

Future-oriented standards and high-end quality for your network.



- Physical properties:
- Basic conductor: Solid AWG 22/1, bare annealed copper, diameter 0.62 mm nominal
- System/s of AVCP: AVCP 3
- Insulation: SFS-PE (Foam-Skin Polyethylene)
- Total number of insulated conductors: 8, twisted in 4 pairs
- Color code: blue-white, orange-white, green-white, brown-white
- Individual pair shielding: Aluminum foil, providing 100 % coverage
- Overall shielding: Copper wire braid
- Outer jacket: Halogen-free (FRNC-C/LSZH-3)
- Outer jacket diameter: 0.6 mm nominal
- Color: Yellow (RAL 1016)
- Length: 500 m
- Mechanical properties:
- Tensile loading: 150N max.
- Dynamic bending radius: 8x AD mm min.
- Static bending radius: 4x AD mm min.
- Shipping- and storage temperature range: -20 °C up to +60 °C
- Operating temperature range: -20 °C up to +60 °C

- Temperature installation range: 0°C to +50°C
- Overall diameter: 8.0 mm nominal
- Flame retardancy: IEC 60332-3-24
- Halogen-free & smoke-proof: IEC 60754-2 & IEC 61034
- Fire load: 700 MJ/km
- Weight: 70 kg/km
- Electrical properties:
- Mean impedance: 100±5 Ohm @ 1-600 MHz
- Capacitance: 40 pF/m nominal @ 1 KHz
- Capacitance unbalance (pair-ground): 1.6 pF/m max. @ 1 KHz
- Insulation resistance: 5 GOhm x km min.
- DC loop resistance: 147 Ohm/Km max. (2% max. resistance unbalance)
- Voltage resistance: 72 Vdc max.
- Coupling attenuation: Grade 1 (CA-Type 1b)
- Propagation delay: 10 nS/100 m max.
- Signal propagation delay: 450 nS/100 m max.
- Separating class: "d" acc. to EN 50174-2
- NVP: 75%
- Flame spread: EN 60332-1-2 (LSOH-PVC)
- Halogen-free, corrosiveness: EN 60754-1/2 (LSOH)
- Smoke density: EN 61034-2
- Assortment: Twisted Pair Installation Cables
- Category: CAT 7A
- Shielding: S-FTP, pairs in metal foil and braid shielding
- CPR: Dca
- Length: 500 m
- Color: yellow
- Jacket: LSOH
- Structure: 4 x 2 AWG 22/1, solid twisted pair

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	1	71.00	50.00	53.00	53.00	140,450.00
Packaging Unit Inside	1	71.00	50.00	53.00	53.00	140,450.00
Packaging Unit Single	1	71.00	50.00	53.00	53.00	140,450.00
Net single without Packaging	0	71.00	0.00	0.00	0.00	0.00

More images:

Produktbeschreibung / Product Information	Physikalische Spezifikationen / Physical Properties
Produktname: Professional Ethernet Patch Cable (150m) Teilenummer: DK-1743-A-VH-D-5 // CAT 7a S/FTP Installation Cable, 500m, Duplex, D _{ca} Hersteller: DIGITUS Professional Network	Standard: EN 50173-1, EN 50173-2, EN 50173-3, EN 50173-4, EN 50173-5, EN 50173-6, EN 50173-7, EN 50173-8, EN 50173-9, EN 50173-10, EN 50173-11, EN 50173-12, EN 50173-13, EN 50173-14, EN 50173-15, EN 50173-16, EN 50173-17, EN 50173-18, EN 50173-19, EN 50173-20, EN 50173-21, EN 50173-22, EN 50173-23, EN 50173-24, EN 50173-25, EN 50173-26, EN 50173-27, EN 50173-28, EN 50173-29, EN 50173-30, EN 50173-31, EN 50173-32, EN 50173-33, EN 50173-34, EN 50173-35, EN 50173-36, EN 50173-37, EN 50173-38, EN 50173-39, EN 50173-40, EN 50173-41, EN 50173-42, EN 50173-43, EN 50173-44, EN 50173-45, EN 50173-46, EN 50173-47, EN 50173-48, EN 50173-49, EN 50173-50, EN 50173-51, EN 50173-52, EN 50173-53, EN 50173-54, EN 50173-55, EN 50173-56, EN 50173-57, EN 50173-58, EN 50173-59, EN 50173-60, EN 50173-61, EN 50173-62, EN 50173-63, EN 50173-64, EN 50173-65, EN 50173-66, EN 50173-67, EN 50173-68, EN 50173-69, EN 50173-70, EN 50173-71, EN 50173-72, EN 50173-73, EN 50173-74, EN 50173-75, EN 50173-76, EN 50173-77, EN 50173-78, EN 50173-79, EN 50173-80, EN 50173-81, EN 50173-82, EN 50173-83, EN 50173-84, EN 50173-85, EN 50173-86, EN 50173-87, EN 50173-88, EN 50173-89, EN 50173-90, EN 50173-91, EN 50173-92, EN 50173-93, EN 50173-94, EN 50173-95, EN 50173-96, EN 50173-97, EN 50173-98, EN 50173-99, EN 50173-100

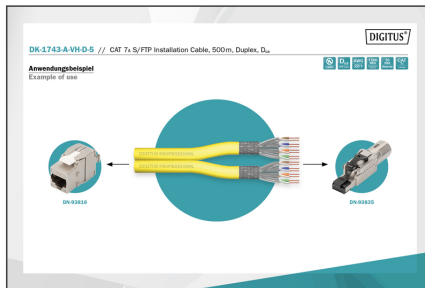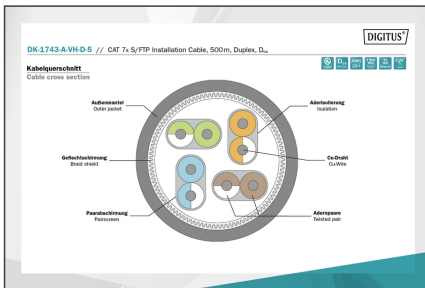


Certificate
No. 40817-11

Zertifikat
Nr. 40817-11

Class E **Klasse E**

2 Connector Parameter List, Copper, Class E

GHMT Type Approval

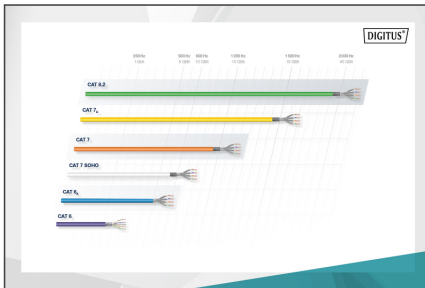

GHMT Parameter	Parameter description	Parameter value	Parameter description	Parameter value
B _{2ca}	Sehr hoch Very high	1+	Sehr hoch Very high	1+
C _{ca}	Hoch High	3	Hoch High	3
D _{ca}	Mittel Medium	3	Mittel Medium	3
E _{ca}	Gering Low	3	Gering Low	3

DIGITUS

1500 MHz, 10 Gbit Ethernet, CAT 7a, AWG 22/1, LSZH, D_{ca}, CPE class

CAT 7a S/FTP Installation Cable, 500m, Duplex, D_{ca}

Param.	A3	A	T	S/FTP	S	E
1000	20	18	18	18	18	18
100	15	12	12	12	12	12
10	10	8	8	8	8	8
1	5	4	4	4	4	4

