


# DIGITUS CAT 7A S/FTP installation cable, 1000 m, Simplex, B2ca

DK-1745-A-VH-10  
EAN 4016032435938

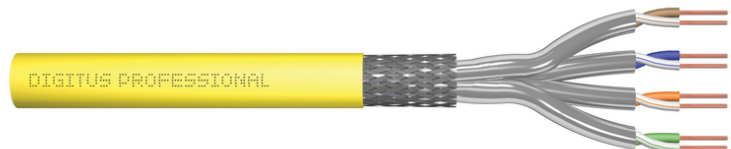

**CAT 7A S-FTP installation cable, 1500 MHz B2ca (EN 50575), AWG 22/1, 1000 m drum, sx, ye**

The DIGITUS® CAT 7A S/FTP installation cable features the following cable structure 4x2x AWG22/1 and achieves a transmission frequency of up to 1500 MHz. The halogen-free cable sheath complies with the standards IEC 60332-3-24, FRNC-C, LSZH-3 and CPR Euro class B2ca. The cable is suitable for building cabling in secondary and tertiary areas. Complies with the following standards ISO/IEC 11801, DIN EN 50173, DIN EN 50288-4-1.



**DIGITUS® CAT 7A S/FTP installation cable 4x2x AWG22/1 up to 1500 MHz. The halogen-free cable sheath complies with the standards IEC 60332-3-24, FRNC-C, LSZH-3 and CPR Euro class B2ca. Complies with ISO/IEC 11801, DIN EN 50173, DIN EN 50288-4-1.**

- Physical properties:
- Conductor: Bare annealed copper, solid AWG 22/1
- Insulation: SFS-PE (Foam-Skin Polyethylene)
- Total number of insulated conductors: 8, twisted in 4 pairs
- Color code: Blue-white, orange-white, green-white, brown-white
- Individual pair shielding: Aluminum foil, providing 100 % coverage
- Overall shielding: Copper braid
- Outer sheath: Eca - B2ca acc. to EN 50575; LSZH
- Outer sheath diameter (nominal): 0.50 mm (Eca); 0,52 mm (Dca); 0,60 mm (Cca); 0,60 (B2ca)
- Color: orange (RAL 2000)
- Mechanical properties:
- Tensile loading: 150N max.
- Dynamic bending radius: 8x AD mm min.
- Static bending radius: 4x AD mm min.

- Shipping- and storage temperature range: -20 °C up to +75 °C
- Operating temperature range: -20 °C bis +50 °C
- Installation temperature range: 0 °C to +50 °C
- Overall diameter Simplex (nominal): 7,0 mm (Eca); 7,2 mm (Dca); 7,5 mm (Cca); 7,5 mm (B2ca)
- Weight (kg/km): 49,5 kg (Eca); 51 kg (Dca), 53 kg (Cca); 53 kg (B2ca)
- Electrical properties:
- Impedance: 100±15 Ohm @ 4 - 1000 MHz; 100±25 OHM @ 100-600 MHz
- Capacitance: 45 pF/m nominal @ 1 KHz
- Capacitance unbalance (pair-ground): 1,6 pF/m max. @ 1 KHz
- Insulation resistance: 5 GOhm x km min.
- DC resistance: 95 Ohm/km max. (2% max. resistance unbalance)
- DC loop resistance: 190 Ohm/km max. (2% max. resistance unbalance)
- Voltage resistance: 72 Vdc max.
- Coupling attenuation: CA-Type 1b
- Signal propagation delay: 450 nS/100 m max.
- Propagation delay: 10 nS/100 m max.
- Separating class: „d“ acc. to EN 50174-2
- NVP: 79%
- Assortment: Twisted Pair Installation Cables
- Category: CAT 7A
- Shielding: S-FTP, pairs in metal foil and braid shielding
- CPR: B2ca
- Length: 1000 m
- Color: yellow
- Jacket: LSOH
- Structure: 4 x 2 AWG 22/1, solid twisted pair

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	1	0.00	0.00	0.00	0.00	0.00
Packaging Unit Inside	1	0.00	0.00	0.00	0.00	0.00
Packaging Unit Single	1	0.00	0.00	0.00	0.00	0.00
Net single without Packaging	0	0.00	0.00	0.00	0.00	0.00

More images:

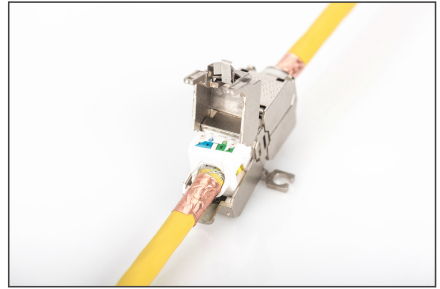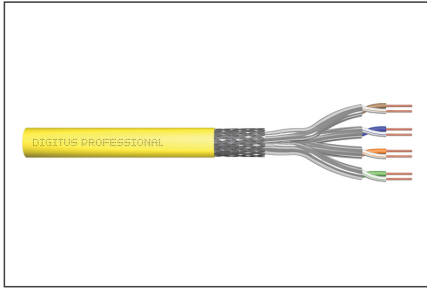

**DIGITUS**

AWG 22/1 1500 MHz 10 Gbit Ethernet CAT 7A 1,000 m LSZH B2<sub>ca</sub> CPFL class

**CAT 7A S/FTP Installation Cable, 1,000 m, Simplex, B2<sub>ca</sub>**

**DIGITUS**

DK-1745-A-VH-10 // CAT 7A S/FTP Installation Cable, 1,000m, Simplex, B2<sub>ca</sub>

Anwendungsbeispiel Example of use

**DIGITUS**

DK-1745-A-VH-10 // CAT 7A S/FTP Installation Cable, 1,000m, Simplex, B2<sub>ca</sub>

Kabelquerschnitt Cable cross section

**DIGITUS**

Produktinformationen Product Information	Physikalische Spezifikationen Physical Properties
<b>Bestandteile Components</b>	<b>Materialien Materials</b>
<b>Technische Eigenschaften Technical Properties</b>	<b>Mechanische Eigenschaften Mechanical Properties</b>
<b>Umweltbedingungen Environmental Conditions</b>	<b>Abmessungen Dimensions</b>
<b>Zusätzliche Informationen Additional Information</b>	<b>Wichtige Hinweise Important Notes</b>

**DIGITUS**

Leistungseigenschaften Transmission Properties

FRF45	ATT	NEXT	PS NEXT	ACR	PS ACR	RL	ELFEXT	PS ELFEXT
100	100	100	100	100	100	100	100	100
10	10	10	10	10	10	10	10	10
1	1	1	1	1	1	1	1	1
0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1
0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01
0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001
0.0001	0.0001	0.0001	0.0001	0.0001	0.0001	0.0001	0.0001	0.0001
0.00001	0.00001	0.00001	0.00001	0.00001	0.00001	0.00001	0.00001	0.00001


**DIGITUS**

Certificate No. 100074-10 Class 5e

Zertifikat No. 100074-10 Klasse 5e

2 Connector Permanent Link, Copper, Class 5e

GHMT Type Approval

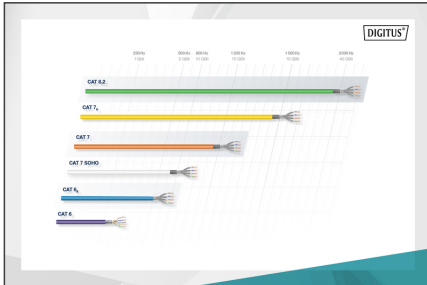

**DIGITUS**

Leistungseigenschaften Transmission Properties

FRF45	ATT	NEXT	PS NEXT	ACR	PS ACR	RL	ELFEXT	PS ELFEXT
100	100	100	100	100	100	100	100	100
10	10	10	10	10	10	10	10	10
1	1	1	1	1	1	1	1	1
0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1
0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01
0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001
0.0001	0.0001	0.0001	0.0001	0.0001	0.0001	0.0001	0.0001	0.0001
0.00001	0.00001	0.00001	0.00001	0.00001	0.00001	0.00001	0.00001	0.00001

