


# DIGITUS Cat.6 F/UTP installation cable, 305 m, simplex, Dca

**DK-1624-VH-305**  
**EAN 4016032441991**

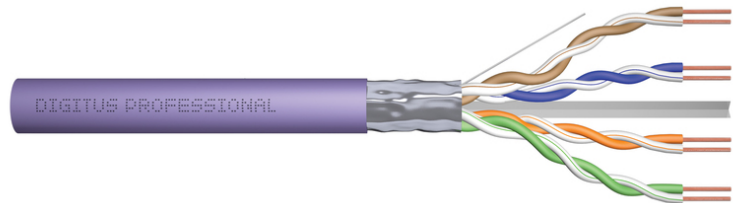

**CAT 6 F-UTP installation cable, 250 MHz, AWG 23/1 Dca (LSZH-1), 305 m, drum, simplex, purple**

The Digitus Cat 6 F/UTP installation cable is designed for use in the structured data center and the building cabling according to ISO/IEC 11801, DIN EN 50288-5-1, DIN EN 50173, IEC 60332-1. The cable is perfectly suitable for the transmission of both analog and digital data and also supports POE and POE+.


**Future-oriented standards and high-end quality for your network.**

- Physical properties:
- Basic conductor: Solid AWG 23/1, bare annealed copper, diameter 0.57 mm nominal
- System/s of AVCP: AVCP 3
- Insulation: HD-PE
- Total number of insulated conductors: 8, twisted in 4 pairs
- Color code: blue-white, orange-white, green-white, brown-white
- Individual pair shield: None
- Overall shielding: Aluminum foil, providing 100% coverage, drain wire
- Outer jacket: Halogen-free (FRNC-B/LSZH-1)
- Outer jacket diameter: 0.50 mm nominal
- Color: Purple (RAL 4005)
- Mechanical properties:
- Tensile loading: 150N max.
- Dynamic bending radius: 8x AD mm min.
- Static bending radius: 4x AD mm min.

- Shipping- and storage temperature range: -20 °C up to +60 °C
- Operating temperature range: -20 °C up to +75 °C
- Installation temperature range: 0 °C up to +50 °C
- Overall diameter: 7.0 mm nominal
- Flame retardancy: IEC 60332-1
- Halogen-free & smoke-proof: IEC 60754-2 & IEC 61034
- Fire load: 295 MJ/km
- Electrical properties:
- Mean impedance: 100±5Ohm at 1MHz - 600MHz
- Capacitance: 48 pF/m nominal @ 800 Hz
- Capacitance unbalance (pair-ground): 1.5 pF/m max. @ 1 KHz
- Insulation resistance: 5 GOhm x km min.
- DC loop resistance: 147 Ohm/km max. (2% max. resistance unbalance)
- Voltage resistance: 72 Vdc max.
- Coupling attenuation: 40 dB
- Signal propagation delay: 535 nS/100 m max.
- Propagation delay: 20 nS/100 m max.
- NVP: 69%
- Assortment: Twisted Pair Installation Cables
- Category: CAT 6
- Shielding: F-UTP, foil shielding
- CPR: Dca
- Length: 305 m
- Color: violet
- Jacket: LSOH
- Structure: 4 x 2 AWG 23/1, solid twisted pair

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm <sup>3</sup>
Packaging Unit Carton	1	19.00	39.50	38.00	27.50	0.00
Packaging Unit Inside	1	19.00	39.50	38.00	27.50	0.00
Packaging Unit Single	1	19.00	39.50	38.00	27.50	0.00
Net single without Packaging	0	0.00	0.00	0.00	0.00	0.00

More images:

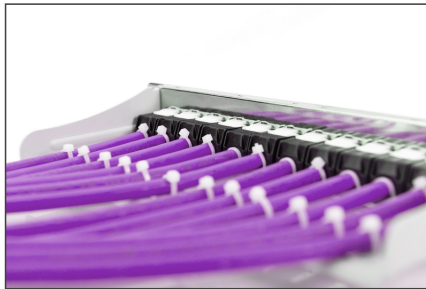

**CAT 6 F/UTP Installation Cable, 305 m, Simplex, E<sub>ca</sub>**

- AWG 23/1
- 250 MHz
- 1 Gbit Ethernet
- CAT 6
- 20°/7 x 75°
- LSZH
- E<sub>ca</sub> CPR class

**DK.1623-VH-305 // CAT 6 F/UTP Installation Cable, 305m, Simplex, E<sub>ca</sub>**

**Anwendungsbeispiel**  
Example of use

**DK.1623-VH-305 // CAT 6 F/UTP Installation Cable, 305m, Simplex, E<sub>ca</sub>**

**Kabelquerschnitt**  
Cable cross section

- Adresspunkt: Outer point
- Querschirmung: Total shield
- Cu-Dräht: Cu-Wire
- Außenmantel: Jacket part

**Produktinformation Product Information**

Bezeichnung: DK.1623-VH-305	Hersteller: HUBER+SUHNER AG	Produkttyp: Patchkabel	Material: PVC
Bestellnummer: 1623-VH-305	Hersteller-Nr.: 1623-VH-305	Produkttyp: Patchkabel	Material: PVC
Bezeichnung: DK.1623-VH-305	Hersteller: HUBER+SUHNER AG	Produkttyp: Patchkabel	Material: PVC
Bestellnummer: 1623-VH-305	Hersteller-Nr.: 1623-VH-305	Produkttyp: Patchkabel	Material: PVC

**Technische Eigenschaften Physical Properties**

Standard: IEC 60603-2-10	Standard: IEC 60603-2-10	Standard: IEC 60603-2-10
Standard: IEC 60603-2-10	Standard: IEC 60603-2-10	Standard: IEC 60603-2-10

**Leistungsdaten Transmission Properties**

AWG	AWG	MAX	PK MAX	AWG	PK AWG	AWG	PK AWG	PK AWG	PK AWG
1	24	262	262	262	262	262	262	262	262
1	14	303	303	303	303	303	303	303	303
0	14	303	303	303	303	303	303	303	303
0	14	303	303	303	303	303	303	303	303
0	14	303	303	303	303	303	303	303	303
0	14	303	303	303	303	303	303	303	303


**ETL Verified Certificate of Conformance Number: 161102862-010**

**Intertek**

ETL Verified Certificate of Conformance Number: 161102862-010

Intertek

161102862-010

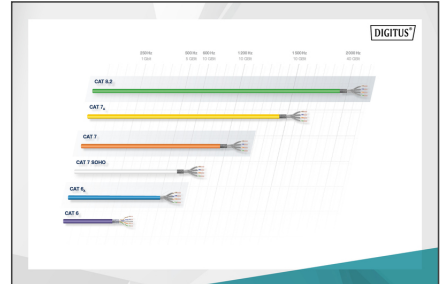

**Digitus Professional**

**2024**

**Digitus Professional**

**2024**

**Digitus Professional**

**2024**

**Digitus Professional**

**2024**

