


DIGITUS CAT 8.2 S/FTP installation cable, 500 m, Simplex, B2ca

DK-1845-VH-5
EAN 4016032445692

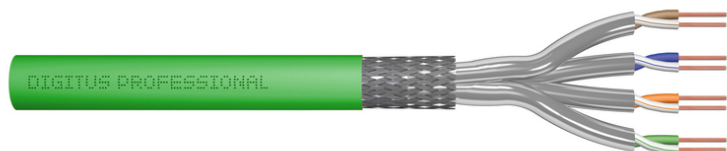

CAT 8.2 S-FTP installation cable, 2000 MHz B2ca (EN 50575), AWG 22/1, 500 m drum,

The Digitus Cat 8.2 S/FTP installation cable is designed for use in the structured data center and the building cabling according to ISO/IEC 11801, DIN EN 50288-12-1, DIN EN 50173, IEC 60332-3-24. The cable is perfectly suitable for the transmission of both analog and digital data and also supports POE. The shielding structure is composed of single shielded pairs with a tinned copper braid, which ensures excellent shielding and electrical values.

Future-oriented standards and high-end quality for your network

- Physical properties:
- Conductor: Bare copper wire, AWG 22/1
- System(s) of assessment and verification of constancy of performance: System 3
- Insulation: SFS-PE (foamed polyethylene jacket)
- Total number of insulated conductors: 8, twisted into 4 pairs
- Color code: Blue-white, orange-white, green-white, brown-white
- Shielding of the individual pairs: Aluminum-laminated polyester film, covers 100%
- Overall shielding: Tinned copper braiding
- Outer sheath: B2ca according to EN 50575
- Outer sheath thickness (nominal): 0.55 mm nominal
- Outer sheath color: Yellow
- Mechanical properties:
- Strain relief: 150N max.
- Dynamic bending radius: 8x AD mm min.
- Static bending radius: 4x AD mm min.
- Transport and storage temperature range: -20 °C to +75 °C

- Operating temperature range: -20 °C to +60 °C
- Installation temperature range: 0 °C to +50 °C
- Outer diameter simplex (nominal): 7.9 mm nominal (Dca)
- Weight (kg/km): 65 kg/km
- Electrical properties:
- Impedance: 100±15Ohm @ 1 - 2000MHz
- Capacitance: 99 pF/30m nominal @ 1 KHz
- Capacitance unbalance (pair-earth): 99pF/30m max. @ 1 KHz
- Insulation resistance: 5 GOhm x km min.
- DC resistance: 2.40hm/30m max. (4% max. unbalanced resistance)
- Loop resistance: 5.6 Ohm/24m max. (3% max. unbalanced resistance)
- Operating voltage: 72 Vdc max.
- Coupling attenuation: CA-Type 1
- Phase delay: 171 nS/30 m max.
- Time delay: 13.5 nS/130 m max.
- Separation class: "d" according to EN 50174-2
- NVP: 79%
- Assortment: Twisted Pair Installation Cables
- Category: CAT 8.2
- Shielding: S-FTP, pairs in metal foil and braid shielding
- CPR: B2ca
- Length: 500 m
- Color: yellow
- Jacket: LSOH
- Structure: 4 x 2 AWG 22/1, solid twisted pair


Package contents

- CAT 8.2 S/FTP installation cable on drum, 500 m, Simplex, B2ca

Logistics

	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	1	0.00	0.00	0.00	0.00	0.00
Packaging Unit Inside	1	0.00	0.00	0.00	0.00	0.00
Packaging Unit Single	1	0.00	0.00	0.00	0.00	0.00
Net single without Packaging	0	0.00	0.00	0.00	0.00	0.00

More images:

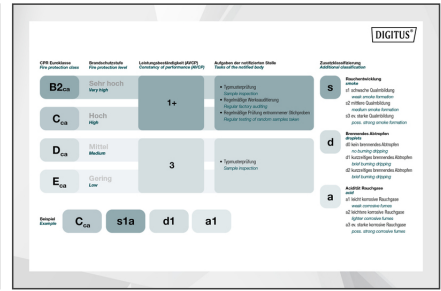

DIGITUS


AWG 22/1, 2000 MHz, 40 Gbit Ethernet, CAT 8.2, 20°/40° LSZH, Dca, CPRI class

CAT 8.2 S/FTP Installation Cable, 500m, Simplex, D_{ca}

DIGITUS

DK-1843-VH-S // CAT 8.2 S/FTP Installation Cable, 500m, Simplex, D_{ca}

Example of use

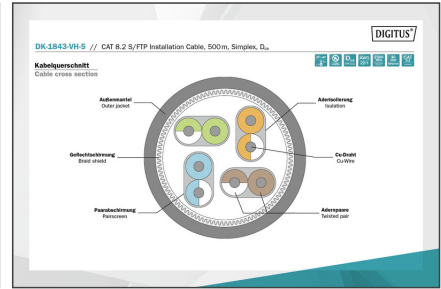

DIGITUS

Produktinformation Product Information	Physikalische Spezifikationen Physical Properties
Bestandteile Components	Materialien Materials
Technische Eigenschaften Technical Properties	Mechanische Eigenschaften Mechanical Properties
Umweltbedingungen Environmental Conditions	Abmessungen Dimensions
Zusätzliche Informationen Additional Information	Normen Standards

DIGITUS

Leistungseigenschaften Transmission Properties

Strecke Distance	10Gbps 10G	40Gbps 40G	100Gbps 100G	400Gbps 400G	800Gbps 800G
1	1	1	1	1	1
2	1	1	1	1	1
3	1	1	1	1	1
4	1	1	1	1	1
5	1	1	1	1	1
6	1	1	1	1	1
7	1	1	1	1	1
8	1	1	1	1	1
9	1	1	1	1	1
10	1	1	1	1	1
11	1	1	1	1	1
12	1	1	1	1	1
13	1	1	1	1	1
14	1	1	1	1	1
15	1	1	1	1	1
16	1	1	1	1	1
17	1	1	1	1	1
18	1	1	1	1	1
19	1	1	1	1	1
20	1	1	1	1	1
21	1	1	1	1	1
22	1	1	1	1	1
23	1	1	1	1	1
24	1	1	1	1	1
25	1	1	1	1	1
26	1	1	1	1	1
27	1	1	1	1	1
28	1	1	1	1	1
29	1	1	1	1	1
30	1	1	1	1	1
31	1	1	1	1	1
32	1	1	1	1	1
33	1	1	1	1	1
34	1	1	1	1	1
35	1	1	1	1	1
36	1	1	1	1	1
37	1	1	1	1	1
38	1	1	1	1	1
39	1	1	1	1	1
40	1	1	1	1	1
41	1	1	1	1	1
42	1	1	1	1	1
43	1	1	1	1	1
44	1	1	1	1	1
45	1	1	1	1	1
46	1	1	1	1	1
47	1	1	1	1	1
48	1	1	1	1	1
49	1	1	1	1	1
50	1	1	1	1	1
51	1	1	1	1	1
52	1	1	1	1	1
53	1	1	1	1	1
54	1	1	1	1	1
55	1	1	1	1	1
56	1	1	1	1	1
57	1	1	1	1	1
58	1	1	1	1	1
59	1	1	1	1	1
60	1	1	1	1	1
61	1	1	1	1	1
62	1	1	1	1	1
63	1	1	1	1	1
64	1	1	1	1	1
65	1	1	1	1	1
66	1	1	1	1	1
67	1	1	1	1	1
68	1	1	1	1	1
69	1	1	1	1	1
70	1	1	1	1	1
71	1	1	1	1	1
72	1	1	1	1	1
73	1	1	1	1	1
74	1	1	1	1	1
75	1	1	1	1	1
76	1	1	1	1	1
77	1	1	1	1	1
78	1	1	1	1	1
79	1	1	1	1	1
80	1	1	1	1	1
81	1	1	1	1	1
82	1	1	1	1	1
83	1	1	1	1	1
84	1	1	1	1	1
85	1	1	1	1	1
86	1	1	1	1	1
87	1	1	1	1	1
88	1	1	1	1	1
89	1	1	1	1	1
90	1	1	1	1	1
91	1	1	1	1	1
92	1	1	1	1	1
93	1	1	1	1	1
94	1	1	1	1	1
95	1	1	1	1	1
96	1	1	1	1	1
97	1	1	1	1	1
98	1	1	1	1	1
99	1	1	1	1	1
100	1	1	1	1	1

Compliance Statement

RoHS (Restriction of Hazardous Substances)

REACH (Registration, Evaluation, Authorization and Restriction of Chemicals)

CE Marking

EU Declaration of Conformity

