

DIGITUS Electrically height-adjustable table frame, 90° L-shaped, triple motor, 2-step, white

DA-90453
EAN 4016032487418



Electric Height Adjustable Desk Frame, 3-leg height:120 cm, load: 120 kg, white

With the electrically height-adjustable desk frame from DIGITUS® you can easily transform your desk into an ergonomic sit/stand workstation. Save yourself the time and money of finding a height-adjustable desk and use our electrically adjustable upgrade kit instead. This model can be used for table tops from 120-180 cm and 140-200 cm in length. Desk top depths of 55 to 100 cm are recommended. You can save 4 height positions via the control panel and adjust them at any time at the touch of a button. The current height is shown on the LED display. The integrated collision protection prevents collisions with potential obstacles when the table is raised or lowered.


Transform your desk into an ergonomic standing/sitting workstation. Electrically height-adjustable, variably extendable and can be installed on the right. With collision protection and memory function for height adjustment.

- Maximum load capacity of up to 120 kg
- Flexibly adjustable frame: Cross brace (112 - 165 cm) x longitudinal brace (130 - 180 cm)

- Suitable for table tops: 120 - 180 cm x 140 - 200 cm and a depth of 55 - 100 cm
- Longitudinal strut (3rd leg) can be flexibly mounted on the right
- Comfortable and electric height adjustment (without table top): 72 - 120 cm
- Height adjustment control panel with LED display (3 brightness settings) and memory function for 4 height settings
- Collision protection function (G-sensor) with 3 sensitivity levels - detection of obstacles during upward & downward movement
- Auto-stop system - stops the motor in the event of resistance and automatically retracts the frame slightly
- 3 motors for easy and quiet (< 50 dB) height adjustment - Lifting speed 25 mm/sec.
- 3 feet (58.5 cm wide), each with 2 foot pads for fine adjustment to compensate for uneven floors
- Weight: 30 kg
- Shape: L-shape
- Color: White
- Mains connection cable: Euro, plug (type C, CEE 7/16) - C7, appliance socket, length: 2 m

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	1	34.60	35.70	95.20	18.50	0.00
Packaging Unit Inside	1	34.60	0.00	0.00	0.00	0.00
Packaging Unit Single	1	34.60	0.00	0.00	0.00	0.00
Net single without Packaging	0	30.00	120.50	112.00	72.00	0.00

More images:

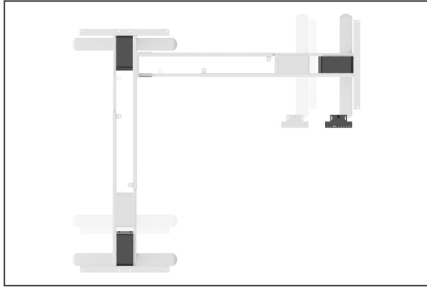

DA-90453
Electrically Height-Adjustable Table Frame, 90° L-shape,
Triple Motor, 2-stage, White

- Load Capacity
- Lifting Speed
- Collision Protection
- Height Adjustment
- Control Panel

Control panel by touch adjustment with LED display and numeric keypad. The control panel is a 2-stage height adjustment unit. All measurements are in millimeters unless otherwise specified.

Control Panel with LED Display and numeric keypad.

DA-90453
Electrically Height-Adjustable Table Frame, 90° L-shape,
Triple Motor, 2-stage, White

- Load Capacity
- Lifting Speed
- Collision Protection
- Height Adjustment
- Control Panel

DA-90453
Electrically Height-Adjustable Table Frame, 90° L-shape,
Triple Motor, 2-stage, White

- Load Capacity
- Lifting Speed
- Collision Protection
- Height Adjustment
- Control Panel

Height adjustment: 1870 mm (2-stage), 7 mm (Motor to 50 mm)

Standard and maximum height adjustment:
Standard: 1200 mm / 1500 mm (2-stage)
Maximum: 1270 mm / 1570 mm

DA-90453
Electrically Height-Adjustable Table Frame, 90° L-shape,
Triple Motor, 2-stage, White

- Load Capacity
- Lifting Speed
- Collision Protection
- Height Adjustment
- Control Panel

Electrically adjustable height: 1200 mm (2-stage), 1270 mm (2-stage), 1500 mm (2-stage), 1570 mm (2-stage)

DA-90453
Electrically Height-Adjustable Table Frame, 90° L-shape,
Triple Motor, 2-stage, White

- Load Capacity
- Lifting Speed
- Collision Protection
- Height Adjustment
- Control Panel

Electrically adjustable height: 1200 mm (2-stage), 1270 mm (2-stage), 1500 mm (2-stage), 1570 mm (2-stage)

Electrically adjustable height: 1200 mm (2-stage), 1270 mm (2-stage), 1500 mm (2-stage), 1570 mm (2-stage)

