

DIGITUS SOHO PRO wall-mounted enclosure - 254 mm (10") - 315x300 mm (WxD)

DN-49101
EAN 4016032493631



10" 6U wall mounting cabinet, SOHO PRO 325 x 315 x 300 mm, black

Whether in the home, office or in sub-distribution boards with limited space: With the compact 254 mm (10") solutions from the SOHO PRO series, you can install your network wherever you want. Available in three height units (6U, 9U, 12U), the wall-mounted enclosures are equipped with a full glass door and a cable entry in the roof and base. A pair of galvanized 254 mm (10") profile rails labelled with legible height units are installed inside. These can be adjusted in depth. Each cabinet is a robust steel construction made of up to 1.5 mm thick sheet steel. The coloring takes the form of electrostatic powder coating in the standard colors grey (RAL 7035) and black (RAL 9005). The door hinges can be changed. The network enclosures are supplied unassembled in an optimized flat pack. Assembly takes place in just a few steps and is child's play thanks to the enclosed step-by-step instructions.

The DIGITUS® wall-mounted enclosure SOHO PRO series is characterized by its efficient delivery in an optimized flat pack and particularly user-friendly installation.

- Protection class IP20
- Lockable safety glass door
- 200° door opening angle
- 1-point locking on the front door
- 254 mm (10") profile rails mounted at the front inside the enclosure, galvanized

- 254 mm (10") profile rails are adjustable in depth
- 1.1 - 1.5 thick sheet steel with a high load-bearing capacity, powder-coated
- Cable entry with brush strip in the roof and with plastic cover in the floor
- Ventilation slots for active and passive ventilation
- Installation depth for components max.: 254 mm
- Product dimensions (H x W x D): 325 x 315 x 300mm
- Packaging dimensions (H x W x D): 175 x 360 x 340 mm
- Weight (net / gross): 5.01 / 5.25 kg

Attributes


- Cabinet type: Wall mounting cabinet
- Color: black, RAL 9005
- Front door: Glass door, single opening
- Load capacity: 30 kg
- Side panels: Both sides
- Units: 6
- Width: 316 mm
- IP protection class: IP20
- Mounted: no

Package contents

- 2x key
- 1x QIG

| Logistics | | | | | | |
|------------------------------|--------------|-------------|------------|------------|-------------|-----------|
| | Number (pcs) | Weight (kg) | Depth (cm) | Width (cm) | Height (cm) | cm³ |
| Packaging Unit Carton | 1 | 5.25 | 34.00 | 36.00 | 17.50 | 21,420.00 |
| Packaging Unit Inside | 1 | 5.25 | 34.00 | 36.00 | 17.50 | 21,420.00 |
| Packaging Unit Single | 1 | 5.25 | 34.00 | 36.00 | 17.50 | 21,420.00 |
| Net single without Packaging | 0 | 5.01 | 30.00 | 31.50 | 32.50 | 0.00 |

More images:

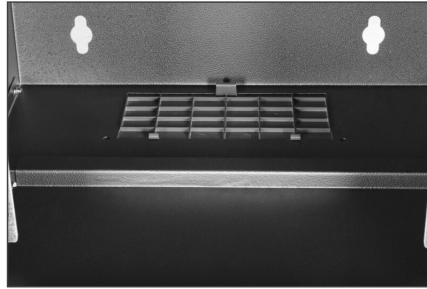

DN-49101
Wall Mounting Cabinet SOHO PRO
254mm (10") - 313x200mm (WxD)

DIGITUS

1. Attach the bottom panel to the body in the direction of the arrows. The protruding top corners of the bottom panel will be inserted into the top slots of the body. Insert the bottom edge of the glass door into the top edge of the bottom panel to the point gap of the body.

2. Assemble the bottom panel to the body by screws.

3. As the cabinet on this floor, the bottom panel mounting the glass door. Insert the bottom edge of the bottom panel into the top edge of the top panel cabinet.

4. Mount the cabinet on the wall using the mounting brackets. Scan the QR code for more information.

DN-49101
Wall Mounting Cabinet SOHO PRO
254mm (10") - 313x200mm (WxD)

DIGITUS

1. Make the U7 cable connect on the top.

2. Lift down the top panel of the cabinet to the top edge of the bottom panel. Open the top edge of the body.

3. Make the top panel on the top. In the direction of the arrows, the top panel will be inserted into the top edge of the body. Press the top panel to the top edge of the body. Press the top panel to the top edge of the body. Press the top panel to the top edge of the body.

4. Mount the top panel on the top edge of the body. Press the top panel to the top edge of the body.

