


# DIGITUS Modularni mikroutikači za okrugli kabel, Átmenő csatlakozó

**A-MO 8/8 SR**  
**EAN 4016032065173**

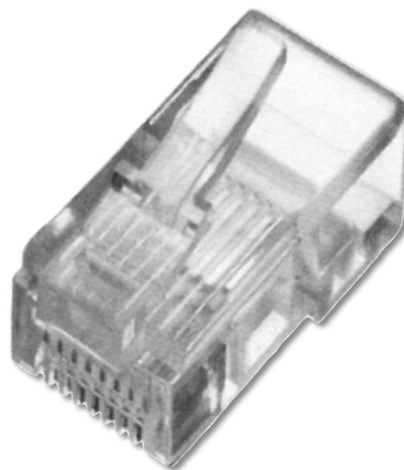

## AMO 8/8 MIKROKONEKTOR C5E RJ45 UTP unshielded

Ovi modularni mikroutikači omogućuju brzu i jednostavnu instalaciju.

- Crimping tool – DN-94025 (Multi Modular Crimping Tool Pass through connectors)
- Layout performance: CAT 5e, 10/100Base-T, 1GBase-T
- Area of application: Patch cable assembly
- Norms: ISO/IEC 11801 3rd Ed., EN 50173-1, EIA/TIA 568-C
- General properties:
- UL certified

- Technical properties:
- Mating cycles female: > 750 acc. to ISO/IEC 11801, IEC 60603-7-5
- Material connector body: Polycarbonat, clear
- Connector contact: Phosphor bronze, brass 0.6 μ gold-plated
- Flammability: UL 94V-2
- Physical properties:
- Insertion force: ≤ 30 N
- Diameter Cu-Conductor: AWG (27/7 ... 24/7)
- Operating temperature: -40 °C to +80 °C
- Current carrying capacity: 1A -1.5A at 50 °C

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	10	16.90	41.30	38.10	20.30	31,942.70
Packaging Unit Inside	100	0.17	4.00	12.00	16.00	768.00
Packaging Unit Single	1	0.00	2.10	1.00	0.70	1.47
Net single without Packaging	0	0.00	2.10	1.00	0.70	1.47