

DIGITUS Zidni komunikacijski ormar Unique - 600x450 mm (ŠxD)

DN-19 07-U
EAN 4016032135203



ORMAR 7U 60/45 DN-19 420x600x450 mm, color grey (RAL 7035)

Zidni komunikacijski ormari Unique proizvedeni su od čvrste čelične konstrukcije s minimalnim brojem spojeva. Bočni paneli mogu se skinuti i zaključati. Montaža ormara je brza i jednostavna. Dodatne nivelirajuće nožice ili kotačiće je moguće posebno naručiti. Zahvaljujući fleksibilnosti, ormari su idealni za sve trenutne IT i telekomunikacijske primjene.

The DIGITUS® Unique Series is made for high demand IT-Infrastructure Solutions - designed and developed on highest standard in Germany

- Safety class rating IP20
- Lockable safety-glass door with steel frame
- 210° door opening angle
- 1-point-locking-mechanism on the front door
- Side panels are lockable and removable
- 483 mm (19") profile rails mounted on the front- and rear side inside of the rack, galvanized
- 483 mm (19") profile rails are adjustable in depth and with height unit marking
- Max. installation depth: 370 mm
- Cable entry on the rear side and base with plastic cover and top with sliding cover

- Roof is prepared for fan units (punched out entries)
- Ventilation slots for active and passive ventilation and exhausting
- Several earthing points for rack components
- Incl. installation set (screws, cage nuts, washers)
- Rack is completely mounted
- Equipment mounting depth min.-max.: 305-370 mm

Attributes

- Bočne ploče: Objе strane
- Boja: svijetlo siva, RAL 7035
- Dubina: 450 mm
- Jedinice: 7
- Kapacitet opterećenja: 100 kg
- Prednja vrata: Staklena vrata, jednostruko otvaranje
- Širina: 600 mm
- Vrsta ormara: Zidni ormarić
- IP klasa zaštite: IP20
- Montirano: Da

Package contents



- Earthing wire set
- Installation set (screws, cage nuts, washers)
- 2 x Keys

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	1	18.00	50.00	65.00	47.00	152.75
Packaging Unit Inside	1	18.00	50.00	65.00	47.00	152.75
Packaging Unit Single	1	18.00	50.00	65.00	47.00	152.75
Net single without Packaging	0	17.00	45.00	60.00	42.00	113.40

More images:



Wall Mounting Cabinet Unique Series - 600 x 450 mm

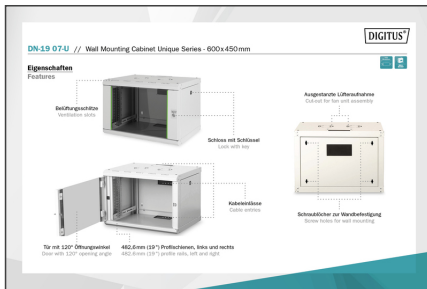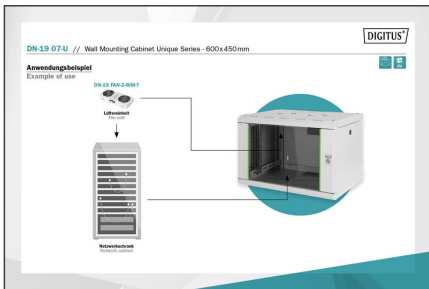

Safety notes

- Ensure adequate ventilation to prevent the installed devices from overheating.
- Network cabinets should not be overfilled and the ventilation openings must not be blocked.
- Cables should be laid neatly and organized in cable ducts or trays.
- Use surge protection devices to protect sensitive devices from power surges or lightning strikes.
- Avoid moisture or wetness while observing the respective IP protection class.
- Ensure that the cabinet and the devices used are properly earthed.
- In regions with frequent thunderstorm activity, professional lightning protection should be integrated into the power supply.
- To avoid uneven loading, always mount the heaviest units at the bottom of the cabinet.
- Disconnect the installed devices from the power supply during maintenance or installation work.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com