

# DIGITUS Prespojni kabel Kat. 5e SF/UTP

DK-1531-010/BL  
EAN 4016032213765



## CAT 5e SF-UTP patch cable, Cu, PVC AWG 26/7, length 1 m, color black



Prespojni kabeli DIGITUS® Kat. 5e klase D proizvedeni su i testirani sukladno ISO/IEC 11801 i DIN EN 50173 Kat. 5e specifikacijama. Garantiraju sukladnost ugrađenog sustava ožičenja zahtjevima specifikacija ISO & EN kanala i omogućuju optimalne razine performansi DIGITUS® kategorije 5e kabliranja. Performanse su testirane na propusnosti do 100 MHz uključujući karakteristike performansi kao što je gubitak preslušavanja na bližem kraju ("NEXT"). DIGITUS® prespojni kabeli dizajnirani su i proizvedeni kako bi u potpunosti zadovoljili uporabu u različitim i najzahtjevnijim aplikacijama. Svaki kabel opremljen je s pregibnicom i zaštitom. Osim toga, pregibnica je opremljena sa zaštitom polugice mikroutikača. Prespojni kabel Kat. 5 jednostavno je prepoznati po konektoru prozirne plave boje.


**Vrhunsku kvalitetu Vaše mreže osigurava oprema proizvedena sukladno najnovijim standardima.**

- 2x RJ45 (8P8C) mikroutikača
- Pregibnica je opremljena sa zaštitom polugice mikroutikača
- Oznaka dužine na pregibnici
- Vodič: Bakar (Cu)
- Ambalaža: DIGITUS Polybag
- Asortiman: Patch kabeli s upređenim paricama
- Konektor 1: Modularni RJ45 (8/8) utikač
- Konektor 2: Modularni RJ45 (8/8) utikač
- Konfiguracija: 1:1
- Kategorija: CAT 5e
- Oklop: SF-UTP, oklop od folije i pletenice
- Duljina: 1 m
- Boja: crni
- Kapica: PVC
- Struktura: 4 x 2 AWG 26/7, upletena parica
- Tank verzija: Ne
- Flat Version: Ne

| Logistics                    |              |             |            |            |             |                 |
|------------------------------|--------------|-------------|------------|------------|-------------|-----------------|
|                              | Number (pcs) | Weight (kg) | Depth (cm) | Width (cm) | Height (cm) | cm <sup>3</sup> |
| Packaging Unit Carton        | 200          | 9.40        | 46.00      | 33.00      | 28.00       | 42.50           |
| Packaging Unit Inside        | 10           | 0.47        | 9.00       | 25.00      | 30.00       | 6.75            |
| Packaging Unit Single        | 1            | 0.05        | 1.60       | 11.50      | 21.00       | 386.40          |
| Net single without Packaging | 0            | 0.04        | 100.00     | 1.17       | 1.27        | 148.59          |

## More images:

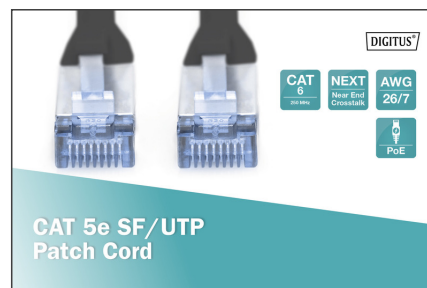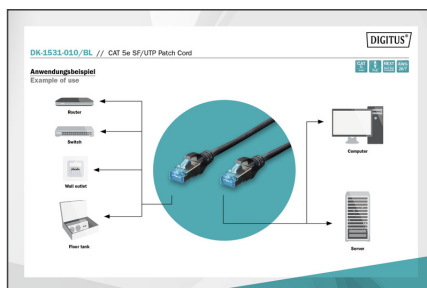

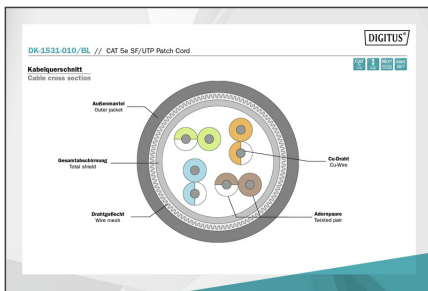

### Safety notes

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Ensure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable.
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

### EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
Auf dem Schüffel 3  
Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)