


# DIGITUS Zidni komunikacijski ormar Dynamic Basic - 600x450 mm (ŠxD)

DN-19 07-U-EC  
EAN 4016032221692

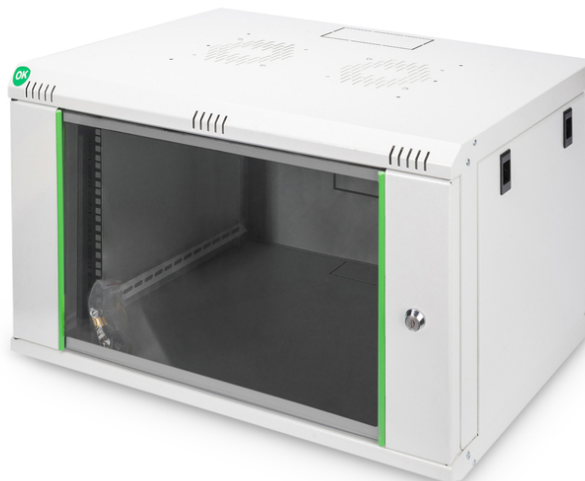

## ORMAR 7U 600X450 DN19-07-EC 416x600x450 mm, color grey (RAL 7035)

Zidni komunikacijski ormari Dynamic Basic proizvedeni su od čvrste čelične konstrukcije. Vareni spojevi osiguravaju stabilnost. Bočni dijelovi mogu se skinuti, a ormar na zid možete jednostavno i brzo montirati. Zahvaljujući fleksibilnosti, ormari su idealni za sve trenutne IT i telekomunikacijske primjene.

- Safety class rating IP20
- Lockable safety-glass door with steel frame
- 235° door opening angle
- 1-point-locking-mechanism on the front door
- 483 mm (19") profile rails mounted on the front- and rear side inside of the rack, galvanized
- 483 mm (19") profile rails are adjustable in depth and with height unit marking
- 0.8 - 1.2 mm strong sheet steel with high load capacity, powder coated
- Cable entry on the rear side, roof and base (pre-punched break-outs)

- Roof is prepared for fan units (punched out entries)
- Ventilation slots for active and passive ventilation and exhausting
- 4 earthing points (base, side panel and front door) with protection cap
- Equipment mounting depth min.-max.: 335 -380 mm
- Bočne ploče: Obje strane
- Boja: svijetlo siva, RAL 7035
- Dubina: 450 mm
- Jedinice: 7
- Kapacitet opterećenja: 60 kg
- Prednja vrata: Staklena vrata, jednostruko otvaranje
- Širina: 600 mm
- Vrsta ormara: Zidni ormarić
- IP klasa zaštite: IP20
- Montirano: Da

### Package contents

- Earthing wire set
- Installation set (screws, cage nuts, washers)
- 2 x Keys

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm <sup>3</sup>
Packaging Unit Carton	1	19.00	48.00	64.00	42.00	129.02
Packaging Unit Inside	1	19.00	48.00	64.00	42.00	129.02
Packaging Unit Single	1	19.00	48.00	64.00	42.00	129.02
Net single without Packaging	0	18.00	45.00	60.00	38.50	103.95

More images:

