


DIGITUS Zidni komunikacijski ormar Dynamic Basic - 600x450 mm (ŠxD)

DN-19 09-U-EC
EAN 4016032221708

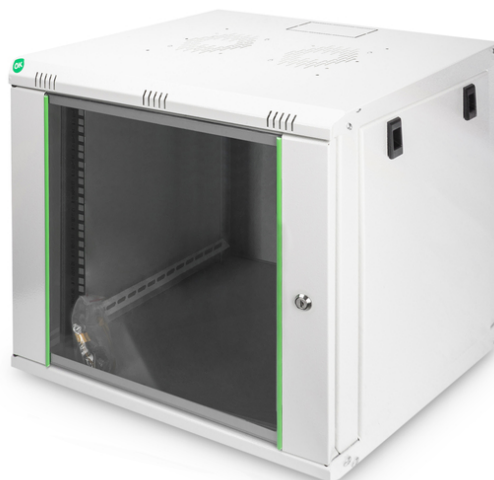

ORMAR 9U 600x450 DN19-09-U-EC 505x600x450 mm, color grey (RAL 7035)

Zidni komunikacijski ormari Dynamic Basic proizvedeni su od čvrste čelične konstrukcije. Vareni spojevi osiguravaju stabilnost. Bočni dijelovi mogu se skinuti, a ormar na zid možete jednostavno i brzo montirati. Zahvaljujući fleksibilnosti, ormari su idealni za sve trenutne IT i telekomunikacijske primjene.

- Protection class IP20
- Lockable safety glass door with steel frame
- 235° door opening angle
- 1-point locking on the front door
- 483 mm (19") profile rails mounted at the front and rear inside the enclosure, galvanized
- 483 mm (19") profile rails are adjustable in depth and marked with the height unit
- 0.8 - 1.2 mm robust sheet steel with high load-bearing capacity, powder-coated
- Cable entry possible at the rear, roof and base (pre-punched cut-outs)
- Roof is prepared to accommodate a fan element (punched-out mounts)

- Ventilation slots for active and passive ventilation
- 4 earthing points (base, side panel and front door) with protective cap
- Installation depth for components min. - max.: 335 - 380 mm

Attributes

- Bočne ploče: Objе strane
- Boja: svijetlo siva, RAL 7035
- Dubina: 450 mm
- Jedinice: 9
- Kapacitet opterećenja: 60 kg
- Prednja vrata: Staklena vrata, jednostruko otvaranje
- Širina: 600 mm
- Vrsta ormara: Zidni ormarić
- IP klasa zaštite: IP20
- Montirano: Da

Package contents

- Earthing cable set
- Installation set (screws, cage nuts, washers)
- 2 x key

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	1	22.00	48.00	64.00	51.00	156.67
Packaging Unit Inside	1	22.00	48.00	64.00	51.00	156.67
Packaging Unit Single	1	22.00	48.00	64.00	51.00	156.67
Net single without Packaging	0	21.00	45.00	60.00	47.40	127.98

More images:**Safety notes**

- Ensure adequate ventilation to prevent the installed devices from overheating.
- Network cabinets should not be overfilled and the ventilation openings must not be blocked.
- Cables should be laid neatly and organized in cable ducts or trays.
- Use surge protection devices to protect sensitive devices from power surges or lightning strikes.
- Avoid moisture or wetness while observing the respective IP protection class.
- Ensure that the cabinet and the devices used are properly earthed.
- In regions with frequent thunderstorm activity, professional lightning protection should be integrated into the power supply.
- To avoid uneven loading, always mount the heaviest units at the bottom of the cabinet.
- Disconnect the installed devices from the power supply during maintenance or installation work.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com