

# DIGITUS Optički multimodni prespojni kabel, OM3, LC / LC

DK-2533-02/3  
EAN 4016032248866



### AL 5LCLC-02/31 PATCH 50UM OM3 2M-D MM OM3 50/125 æ, 2 m

Optički prespojni kabel, dupleks, LC na LC, MM OM3 50/125 µ, 2 m

**Vrhunsku kvalitetu Vaše mreže osigurava oprema izrađena sukladno najnovijim standardima.**

- Dupleks kabel
- LSOH
- Konektor s keramičkom ferulom
- Promjer kabela 2 mm
- Pakiranje 1 komad sa uključenim izvještajem o ispitivanju

#### Attributes



- Ambalaža: DIGITUS Polybag
- Asortiman: Patch kabeli s optičkim vlaknima
- Kabel u boji: modri
- Klasa vlakna: OM3
- Konektor 1: LC
- Konektor 2: LC
- Mod: Višemodni
- Promjer kabela: 2 mm
- Promjer vlakna: 50/125µ
- Stopica: jednobojna
- Vrsta kabela: I-VH 2G50/125µ
- Duljina: 2 m

#### Logistics

	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm <sup>3</sup>
Packaging Unit Carton	160	8.80	41.00	41.00	28.00	47.07
Packaging Unit Inside	20	1.10	19.00	19.00	12.00	4.33
Packaging Unit Single	1	0.06	17.00	17.00	1.00	289.00
Net single without Packaging	0	0.05	15.00	15.00	1.00	225.00

#### More images:

Part No.	DK-2533-02/3			
Lenght	2 m			
Cable Type	Duplex MM 50/125 OM3 LSZH			
	END A		END B	
Connector Type	LC		LC	
Insertion Loss (dB)	0.14	0.13	0.05	0.05
Return Loss (dB)	33.5	31	30.6	31.7
Q.C.	PASS			

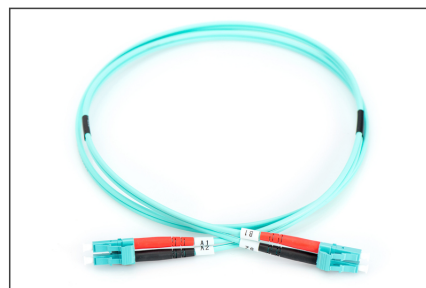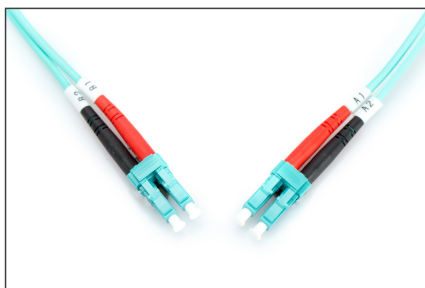

**Safety notes**

- Avoid direct contact with light sources: Fiber optic cables, especially those with active light sources such as lasers (e.g. in optical communication systems), can emit dangerous radiation that can damage
- eyes. Take care never to look directly into the light of an optical fiber, even if the light source is invisible to the naked eye.
- When working with fiber optic cables, especially during tests or when working with lasers, protective goggles should always be worn to protect against harmful radiation.
- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Do not kink or crush: Fiber optic cables are sensitive to mechanical stress.
- To protect cables from physical damage, they should be laid in special ducts or with protective materials
- Keep cable connectors clean: Fiber optic cables are sensitive to dust and dirt. Even small particles on the connectors can severely impair the signal quality.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
Auf dem Schüffel 3  
Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)