

# DIGITUS Aluminijski naponski panel sa 8 sigurnosnih utičnica, 2 m kabela i utikačem

DN-95401

EAN 4016032266396



**KABEL 220/8, Digitus, 19", bez prekidača, bez pren 16A, 4000W, 250VAC 50/60Hz,**

DIGITUS® naponski paneli idealno su rješenje za Vaše 19" komunikacijske ili serverske ormare. Optimizirani su za rack ugradnju, napajanje je 220-240V 50-60 Hz te nude najbolje performanse i učinkovitost. 19" materijal za fiksiranje osigurava optimalnu ugradnju opreme na vertikalnim nosačima Vaših ormara. Naponski paneli mogu se montirati na nekoliko načina: vodoravno, horizontalno, prema gore ili prema dolje, ovisno o potrebi.

**Safe and professional power in the 482.6 mm (19") range**

- 8x safety outlets 250VAC 50/60Hz / 16A / 4000W
- 2x angle profiles for cabinet mounting
- Aluminum profile


- 2 m Cable H05VV-F 3G1,5 mm<sup>2</sup> with safety plug
- Plastic components made by ABS UL-94V-0
- Grounding on aluminium profile
- 45° turned safety outlets

**Attributes**

- El. snaga: 3,6 kVA
- Faze: 1 fazni
- Izlazni priključci: CEE 7/3
- Struja: 16 A
- Ugrađivanje: Radna površina, Stalak 0U, Stalak 1U
- Ulazni utikač: CEE7/7
- Volti: 230 V
- Inčni faktor oblika (IEC 60297): 482,6 mm (19")



Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm <sup>3</sup>
Packaging Unit Carton	10	10.50	55.00	46.00	27.00	68.31
Packaging Unit Inside	1	1.05	6.70	50.00	9.10	3,048.50
Packaging Unit Single	1	1.05	6.70	50.00	9.10	3,048.50
Net single without Packaging	0	0.77	4.40	48.20	4.40	933.15

**More images:**

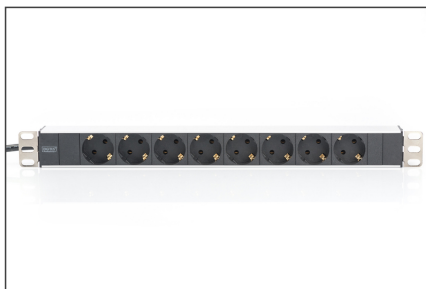



**Aluminum Outlet Strip,  
8 Safety Outlets,  
2 m Supply Safety Plug**

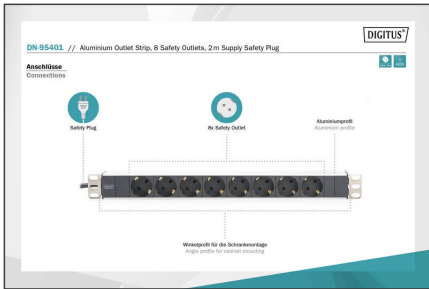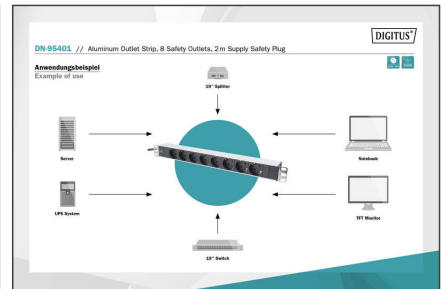

**Safety notes**

- This product is not intended for unsupervised use by children or persons under their care!
- Prevent higher humidity or temperatures than those specified in the data sheet - Avoid moisture, dust or vapors, solvents, flammable gases.
- Multiple sockets are not designed for permanent use with heavy loads!
- Multiple sockets must not be cascaded (avoid stringing together several multiple sockets).
- The maximum connected load must not be exceeded.
- Defective multiple sockets must be taken out of service immediately and disposed of in an environmentally friendly manner.
- In the event of a fault, take the product out of operation and contact a qualified electrician.
- Do not open the product.
- Disconnect the product from the power supply before cleaning. Do not use any aggressive or abrasive cleaning agents for cleaning.
- The ingress of liquids can lead to a short circuit.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
 Auf dem Schüffel 3  
 Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)