

DIGITUS HDMI Repeater

DS-55901
EAN 4016032269014



DIGITUS HDMI High Speed Repeater Video Resolution 1080p, Bandwidth 225MHz

Extends the max. length of HDMI cable up to 35M by regenerating the HDMI signal before it sends the outputs to the HDMI monitor or projector. Furthermore according to the length of HDMI cable the special designed EQ can be adjusted to reach the best transmission function.

Extends the HDMI signals up to 35 m - ideal for HDMI signal distribution and digital signage

- HDMI High Speed Repeater for up to 35m
- Video resolution up to 1080p
- Supports 3D all format, including 1080p@23.98/24Hz, 720p@59.94/60Hz/50Hz
- Bandwidth 225MHz/2.25Gbps per channel (6.75Gbps all channel)
- Deep color 12bit per channel (36bit all channel)

- HDCP pass through
- Supports uncompressed audio such as LPCM, DTS Digital, Dolby Digital (including DTS-HD and Dolby True HD)
- 8 levels of equalization settable by turning EQ from 0 to 7, so that support different length of HDMI cable between 1m to 35m

Attributes


- HDTV rezolucija maks.: 1920 x 1080 piksela, 60 Hz
- HDTV-norma: Full HD
- KVM: Ne
- PoE (napajanje preko Ethernet): Ne
- Razmak: 35 m

Package contents

- DIGITUS Professional HDMI Repeater
- Manual

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm ³
Packaging Unit Carton	96	14.40	46.00	40.00	26.00	47.84
Packaging Unit Inside	1	0.15	5.00	9.00	8.50	382.50
Packaging Unit Single	1	0.15	5.00	9.00	8.50	382.50
Net single without Packaging	0	0.07	2.80	5.00	4.80	67.20

More images:

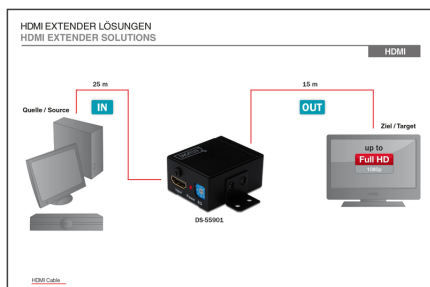

VIDEO VERLÄNGERUNGEN VIDEO EXTENSIONS		M=Meter / meters
HDMI		
DS-55901 (all resolutions)	30.0 M	
DS-55901	30.0 M	
DS-55900	30.0 M	
DS-55900 (all resolutions incl.)	30.0 M	
DS-55900 (all resolutions)	30.0 M	
DS-55910	30.0 M	
VGA		
DS-55901	30.0 M	
DS-55900 (all resolutions)	30.0 M	
DS-55900	30.0 M	
DS-55900 (all resolutions)	30.0 M	
DS-55900 (all resolutions)	30.0 M	
DS-55900 (all resolutions)	30.0 M	
DS-55900 (all resolutions)	30.0 M	
DVI		
DS-54901	30.0 M	
DS-54901	30.0 M	



**Safety notes**

- If the device is powered by a plug-in power supply, ensure that the power adapter is connected correctly and meets the specified requirements (e.g. voltage and current).
- Only use certified CAT5e or CAT6 cables to ensure stable signal transmission.
- For particularly long cable runs or in environments prone to interference, it is recommended to use shielded network cables.
- Make sure that all connections are tight and secure to avoid loose contacts that could affect the signal quality. Make sure that the HDMI and Ethernet connections are connected correctly.
- Make sure that the CAT cable is not laid near high-voltage power lines or other strong sources of electromagnetic interference to avoid signal interference.
- Only operate the device within the specified temperature range.
- Do not use the device outdoors or in damp or wet environments
- Check all connections and cables regularly for wear or damage. Cables and connections can wear out, especially with frequent use or long installations, which can lead to poor signal quality or system failure.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com