

# DIGITUS Modularni prespojni panel, 24 portni

**DN-91410**  
**EAN 4016032280781**



**PANEL KEYSTONE 24-PORTNI 1U 19" DN-91410 Ral:7035- 24-port, blank, 1U, rack mount, grey RAL 7035**

The Modular Patch Panel from DIGITUS® is available as 16- or 24-port version. The 1.5 mm cold rolled c-steel provides the best storage of your Keystone Modules.

- Layout Keystone Entry: Straight
- Area of application: 483 mm (19") cabinet
- Norms: ISO/IEC 11801 3rd Ed., EN 50173-1, EIA/TIA 568-C
- General properties:
- Suitable for 483 mm (19") cabinet mounting
- Suitable for shielded Digitus® Keystone Modules and Couplers
- Central ground connection
- Technical properties:
- Housing material: 1.5 mm SPCC cold rolled steel sheet, powder-coated



- Material standard: EN 10 130(1991), BS 1449, NFA 36/401, DIN 1623, UNI 5866, UNE 36-086, SIS, JIS G 3141, ASTM, SAE, NFA 36/401
- Grounding bar material: Galvanized steel
- Physical properties:
- Operation temperature: -20° C to +70 °C (ISO/IEC 11801, EN 50173-1, ANSI/TIA/EIA 568 C)
- Operation temperature: -20° C to +70 °C (ISO/IEC 11801, EN 50173-1, ANSI/TIA/EIA 568 C)
- Colour: Grey RAL7035

**Attributes**

- Boja: svijetlo siva, RAL 7035
- Jedinice: 1
- Priključci: 24

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	15	13.02	58.00	53.00	24.00	73.78
Packaging Unit Inside	1	0.87	7.30	56.50	10.00	4,124.50
Packaging Unit Single	1	0.87	7.30	56.50	10.00	4,124.50
Net single without Packaging	0	0.41	1.00	48.30	4.40	212.52

**More images:**

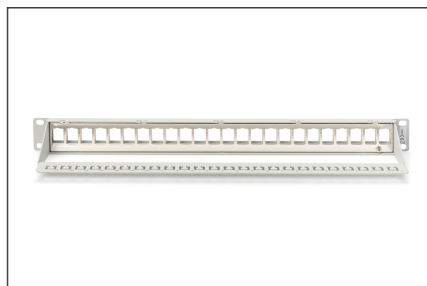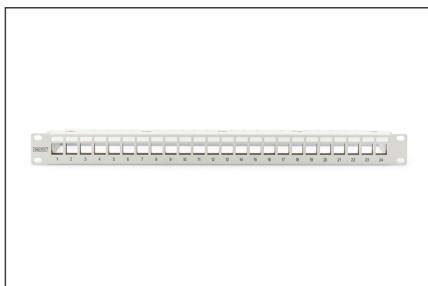

**Safety notes**

- Protect product from moisture

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
Auf dem Schüffel 3  
Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)