


# DIGITUS Keystone utični modul Kat. 6A, oklopljeni, ožičenje bez alata

DN-93615  
EAN 4016032293767

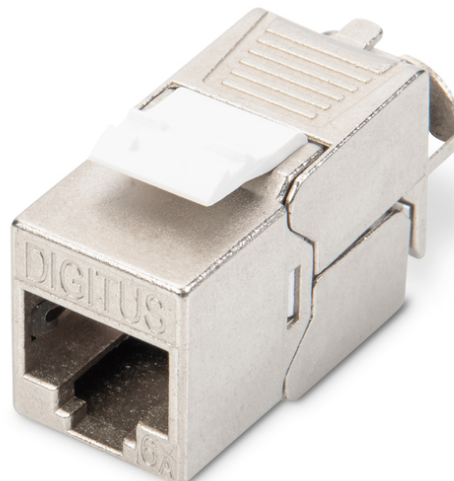

### DN-93615 Keystone modul Digitus, c6a, STP-D tool free connection

Artikl DN-93615 iz DIGITUS® ponude je oklopljeni keystone utični modul Kat. 6A za ožičenje bez alata koji osigurava najbolje moguće performanse i kvalitetu linka Vaše mreže. Kompaktan dizajn omogućava ugradnju 24 komada na 1U prespojnim panelima 483 mm (19"). Sukladan je Kategoriji 6A / 10GBase-T Channel, ANSI/EIA/TIA 568C.2.1 :2002, ISO/IEC 11801:2002.

#### Quick and safe wire terminations without any special tool

- Category 6A 10GBase-T, 500 MHz
- ISO/IEC 11801 3rd Edition, EN 50173-1
- Suitable for PoE/PoE+/4PPoE (IEEE 802.3af, 802.3at, 802.3bt)
- Suitable for modular patch panel and modular wall outlet installation.
- RJ45-Jack, 8P8C
- Cable installation via insulation-displacement connectors, color coded in accordance with EIA/TIA 568 A & B
- Cable grip and cable fixation using intelligent cable manager
- Tool-free mounting connection
- 360° shield contact
- Case material: Zinc die-cast – nickel-plated


- Contact material: Phosphor bronze
- Contact coating: Nickel, gold-plated 0.5 μ
- Insertion force: Max. 30N (as per IEC 60603-7-51)
- Holding force: 7.7 kg between jack and plug
- Operating temperature range: -20 °C to +70 °C (ISO/IEC 11801, ANSI/TIA 568 C.2)
- Mating cycles: ≥ 750 (ISO/IEC 11801, IEC 60603-7-51)
- Copper cable diameter: AWG (26/7 – 22/1), stranded and solid wire
- Tested with AWG 22/1 solid installation cable
- (DIGITUS® DK-174X-A-VH-X; AWG 22/1 cat. 7A installation cable)
- Dielectric strength: 1000 VDC (contact/contact), 1500 VDC (contact/ground)
- Tool-free installation using LSA insulation-displacement connectors color coded in accordance with EIA/TIA 568 A & B
- Intelligent cable manager (resealable)
- Dimensions (HxWxD): 21.0 x 14.5 x 34.5 mm
- Weight: 19.5 g

#### Attributes

- Težina: 22 g
- Kategorija: CAT 6A

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm <sup>3</sup>
Packaging Unit Carton	250	6.80	53.00	31.00	23.00	37.79
Packaging Unit Inside	25	0.68	20.00	14.00	10.50	2.94
Packaging Unit Single	1	0.03	2.00	8.00	11.00	176.00
Net single without Packaging	0	0.02	3.70	1.50	10.00	55.50

More images:

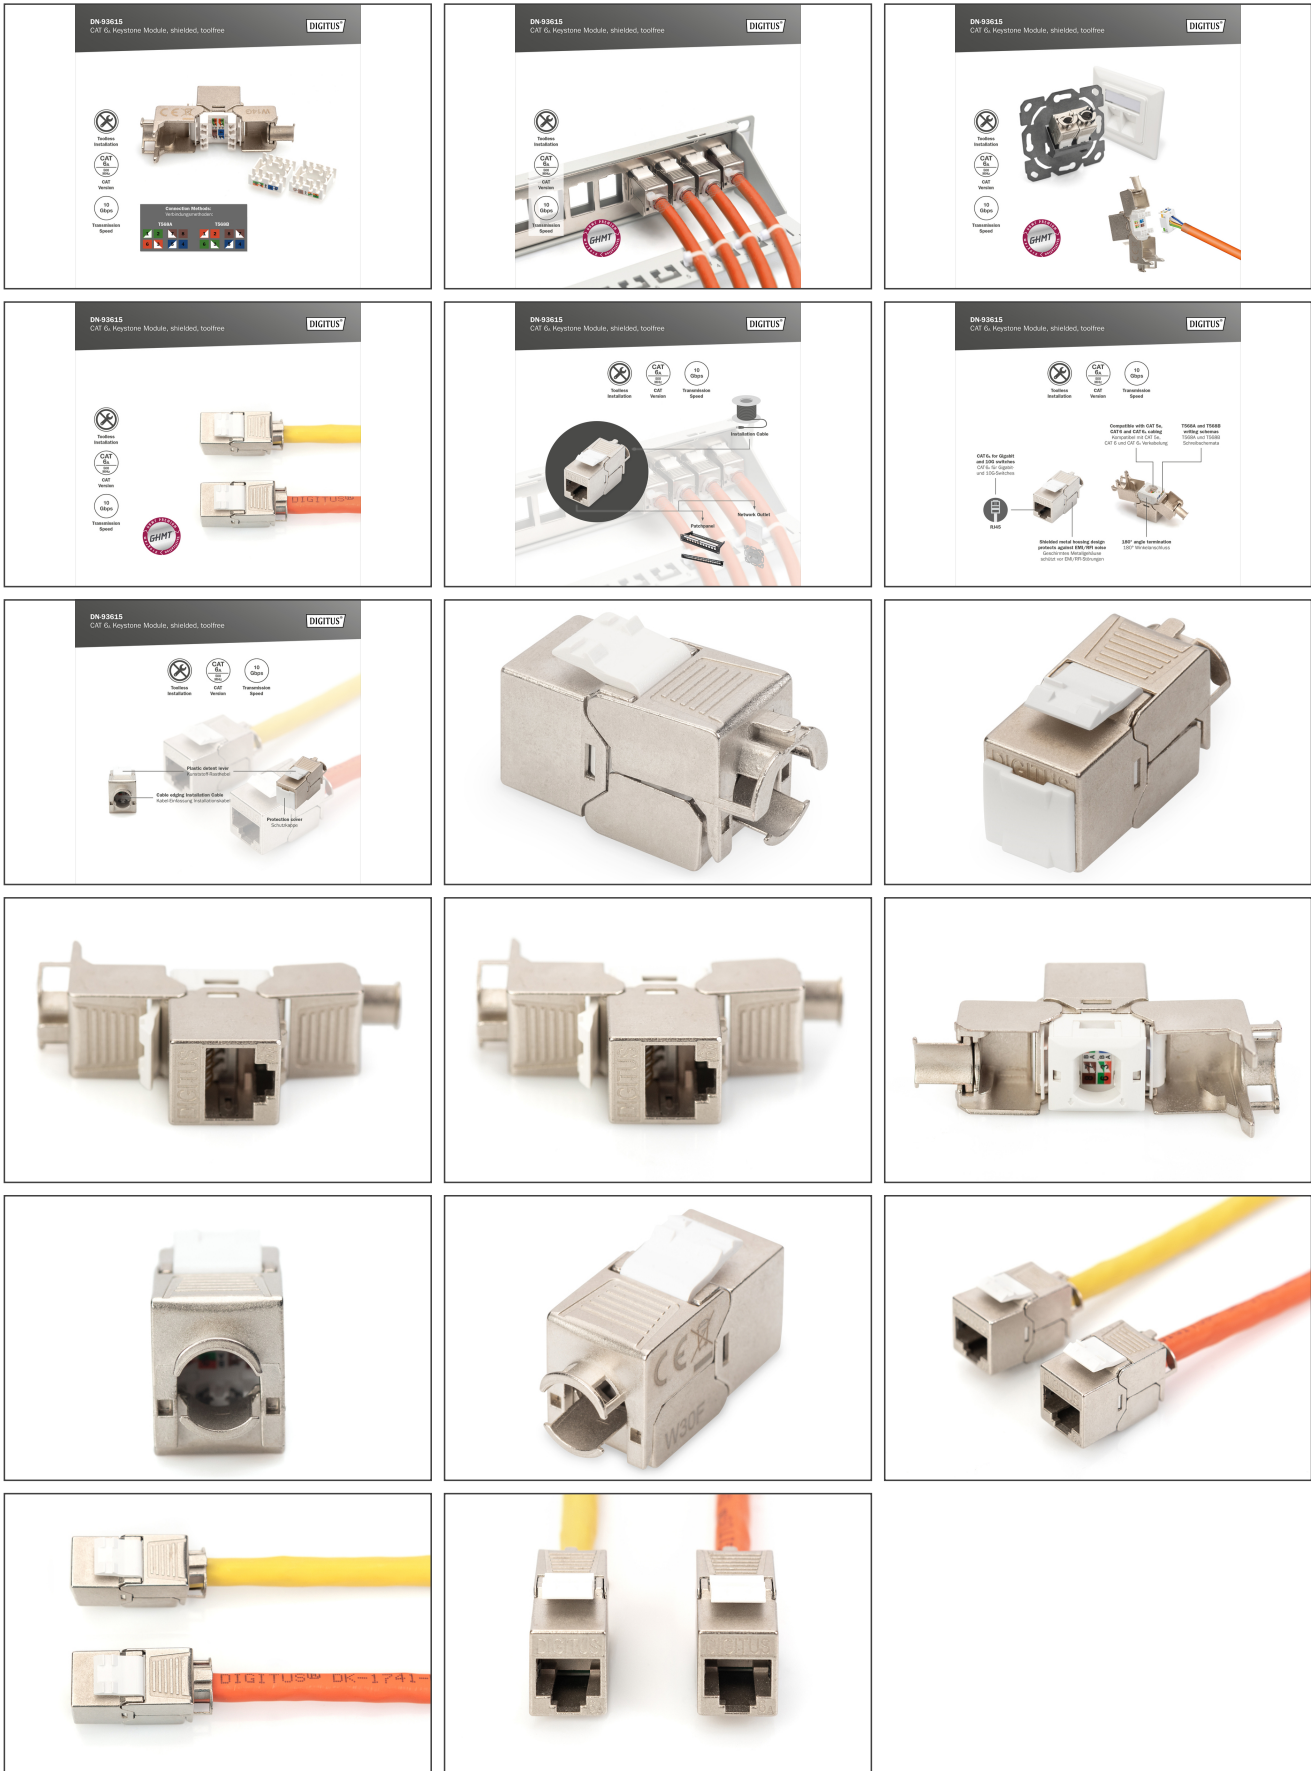

**Safety notes**

- Protect product from moisture
- Avoid antistatic charging when installing the product
- Observe the specifications of the raw cable manufacturer during installation

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
Auf dem Schüffel 3  
Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)