


# DIGITUS DVI adapter cable

**AK-320300-020-S**  
**EAN 4016032298526**

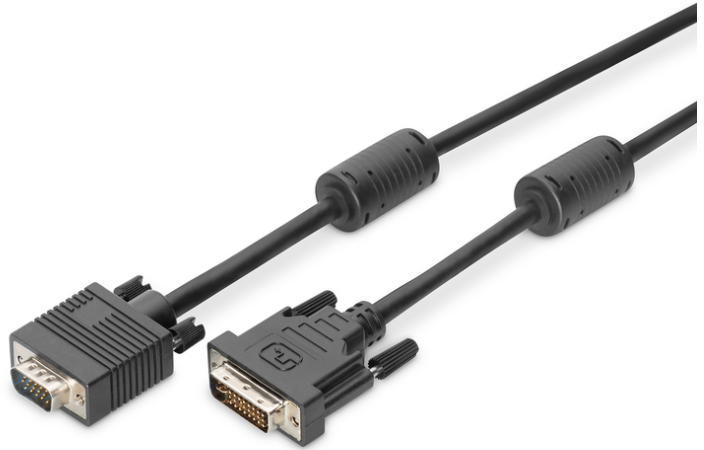

**AK-320300-020-S DVI adapter cable, DVI(24+5) - HD1 5, 2x ferrit, M/M, 2.0m, DVI-I Dual Link**

This analog, HD suitable DVI cable (Dual Link), is used to connect audio/video equipment with HD15 (VGA) interface, such as PC, notebook, monitor, TV or a projector, for example.

**HD ready, Dual-Link**

- Support up to 1080p with 60Hz


**Attributes**

- Ambalaža: Polybag
- Asortiman: DVI kabele
- AWG: 30

- Feritni filter: 2 x feritne kuglice
- HDTV rezolucija maks.: 1920 x 1200 piksela, 60 Hz
- HDTV-norma: Full HD
- Kabel u boji: crni
- Kapice: ukalupljeno
- Konektor 1: DVI-I, (24+5), priključak
- Konektor 2: HD DSUB, 15-polni, utikač
- Konektor u boji: crni
- Materijal žice: CU
- Površina konektora: poniklano
- Duljina: 2 m
- oklop: dvostruki oklop

| Logistics                    |              |             |            |            |             |                 |
|------------------------------|--------------|-------------|------------|------------|-------------|-----------------|
|                              | Number (pcs) | Weight (kg) | Depth (cm) | Width (cm) | Height (cm) | cm <sup>3</sup> |
| Packaging Unit Carton        | 50           | 13.30       | 38.00      | 30.00      | 30.00       | 34.20           |
| Packaging Unit Inside        | 10           | 2.66        | 30.00      | 30.00      | 8.00        | 7.20            |
| Packaging Unit Single        | 1            | 0.27        | 24.00      | 18.00      | 3.50        | 1.51            |
| Net single without Packaging | 0            | 0.22        | 21.00      | 15.00      | 3.00        | 945.00          |

**More images:**

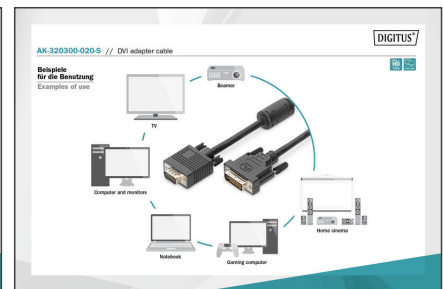

**Safety notes**

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
Auf dem Schüffel 3  
Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)