

# DIGITUS mini GBIC (SFP) modul, 1,25 Gbps, 0,55 km

**DN-81000**  
**EAN 4016032305651**



**DN-81000 SFP MODUL MM LC DUPLEX-D LC Duplex Connector, 850nm, Up to 550m**

DIGITUS® mini GBIC (SFP) transceiver moduli nude najvišu kvalitetu i pouzdanost. Bilo da se koriste u aplikacijama od switch-a do switch-a, konvertera do switch-a, konvertera do konvertera ili u nekim drugim aplikacijama: Široka ponuda DIGITUS® modula omogućuje fleksibilnu uporabu tehnologija optike. Sukladnost MSA (Multi Source Agreement) standardu osigurava kompatibilnost neovisnim proizvođačima.

**Plug and play sistem**

- Mini GBIC SFP (Small Form Factor Pluggable) module
- Compatible with the following manufacturers: Allied Telesis, Allnet, Avaya, CISCO, D-Link, Edimax, FINISAR, FORCE 10, Gigamon, Intellinet, KTI Networks, Level One, PLANET, Tenda, TP-Link, TRENDnet, Mikrotik, ENTERASYS, RIVERSTONE, Unifi, Ubiquiti, ZyXEL, ZTE
- High quality and excellent reliability
- 1.25 Gbps Maximum Data Rate
- Compliant to IEEE 802.3z Gigabit Standard
- Class 1 laser product compliant with EN 60825-1
- Easy plug-and-play installation
- MSA (Multi Source Agreement) compliant




- Hot pluggable
- Connector: 1x LC Duplex
- 1000Base-SX - For Short Haul
- Wavelength: 850nm
- Transmission power: minimum -8 dBm, maximum -3 dBm
- Sensitivity Receiving Power: Minimum -20 dBm
- For a Distance of up to 0.55km
- Suitable for 50/125µm and 62.5/125µm multimode fiber cables
- Safe fast-locking mechanism
- 3.3V power supply
- Operating temperature: 0 °C ~ 70 °C
- Mod: Višemodni
- Priključak: LC
- Udaljenost (km): 0,5
- Valna duljina: 850 nm
- DDM podrška: Ne
- Kompatibilnost proizvođača: Univerzalni (MSA), Cisco
- Način emitiranja: Jednosmjerno
- Ethernet brzina: Gigabit

**Package contents**

- SFP module

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm <sup>3</sup>
Packaging Unit Carton	240	8.50	50.00	29.00	54.50	79.03
Packaging Unit Inside	30	1.06	7.00	20.00	30.00	4.20
Packaging Unit Single	1	0.04	3.10	11.80	9.30	340.19
Net single without Packaging	0	0.02	1.00	5.90	0.80	4.72

More images:

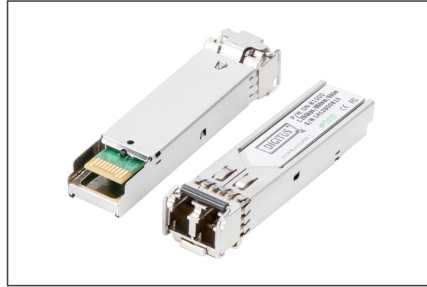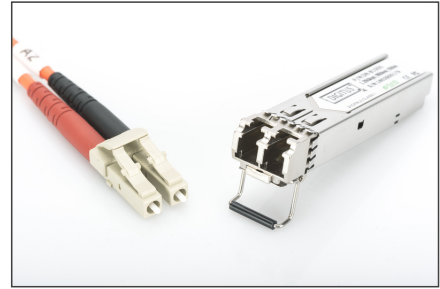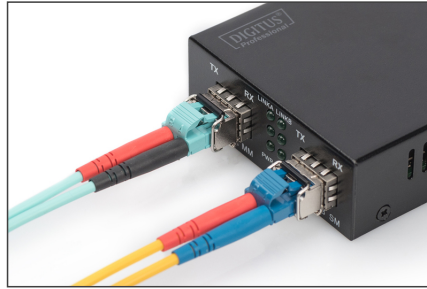

SFP Modules							
Product Number	DOM Code	Speed	Distance	Connector	Mounting	Operating Temperature	Industrial Version
<b>Fast Ethernet</b>							
DM-8001	42780000040	1.0 Gbps	2 km	LC Multimode Duplex	191mm	0 to +70 °C	✓
DM-8002	42780000070	1.0 Gbps	550 m	LC Multimode Duplex	191mm	0 to +70 °C	✓
DM-8004	42780000070	1.0 Gbps	550 m	LC Duplex Duplex	191mm	0 to +70 °C	✓
<b>10G Ethernet</b>							
DM-8005	42780000080	10 Gbps	550 m	LC Multimode Duplex	191mm	0 to +70 °C	✓
DM-8006	42780000080	10 Gbps	200 m	LC Duplex Duplex	191mm	0 to +70 °C	✓
DM-8007	42780000080	10 Gbps	200 m	LC Duplex Duplex	191mm	0 to +70 °C	✓
DM-8008	42780000070	10 Gbps	550 m	LC Duplex Duplex	191mm	0 to +70 °C	✓
DM-8009	42780000080	10 Gbps	550 m	LC Multimode Duplex	191mm	0 to +70 °C	✓
DM-8010	42780000040	10 Gbps	550 m	LC Duplex Duplex	191mm	0 to +70 °C	✓
<b>10G Ethernet Industrial</b>							
DM-8011	42780000080	10 Gbps	550 m	LC Duplex Duplex	191mm	-40 to +85 °C	✓
DM-8012	42780000080	10 Gbps	550 m	LC Duplex Duplex	191mm	-40 to +85 °C	✓
DM-8013	42780000080	10 Gbps	550 m	LC Duplex Duplex	191mm	-40 to +85 °C	✓
DM-8014	42780000080	10 Gbps	550 m	LC Duplex Duplex	191mm	-40 to +85 °C	✓
DM-8015	42780000080	10 Gbps	550 m	LC Duplex Duplex	191mm	-40 to +85 °C	✓
DM-8016	42780000080	10 Gbps	550 m	LC Duplex Duplex	191mm	-40 to +85 °C	✓
DM-8017	42780000080	10 Gbps	550 m	LC Duplex Duplex	191mm	-40 to +85 °C	✓
DM-8018	42780000080	10 Gbps	550 m	LC Duplex Duplex	191mm	-40 to +85 °C	✓
DM-8019	42780000080	10 Gbps	550 m	LC Duplex Duplex	191mm	-40 to +85 °C	✓