

DIGITUS mini GBIC (SFP) modul, 1,25 Gbps, 20km

DN-81001
EAN 4016032305668



DN-81001 SFP MODUL MiniGbic SM LC DUPLEX 20km 1,25 LC Duplex Connector, 1310nm, up to 20km

DIGITUS® mini GBIC (SFP) transceiver moduli nude najvišu kvalitetu i pouzdanost. Bilo da se koriste u aplikacijama od switch-a do switch-a, konvertera do switch-a, konvertera do konvertera ili u nekim drugim aplikacijama: Široka ponuda DIGITUS® modula omogućuje fleksibilnu uporabu tehnologija optike. Sukladnost MSA (Multi Source Agreement) standardu osigurava kompatibilnost neovisnim proizvođačima.

The plug and play fiber connection

- Mini GBIC SFP (Small Form Factor Pluggable) module
- Compatible with the following manufacturers: Allied Telesis, Allnet, Avaya, CISCO, D-Link, Edimax, FINISAR, FORCE 10, Gigamon, Intellinet, KTI Networks, Level One, PLANET, Tenda, TP-Link, TRENDnet, Mikrotik, ENTERASYS, RIVERSTONE, Unifi, Ubiquiti, ZyXEL, ZTE
- High quality and excellent reliability
- 1.25 Gbps Maximum Data Rate
- Compliant to IEEE 802.3z Gigabit Standard
- Class 1 laser product compliant with EN 60825-1
- Easy plug-and-play installation
- MSA (Multi Source Agreement) compliant



- Hot pluggable
- Connector: 1x LC Duplex
- 1000Base-LX - For Long Haul
- Wavelength: 1310nm
- Transmission power: minimum -8 dBm, maximum -3 dBm
- Sensitivity receiving power: minimum -24 dBm
- For a Distance of up to 20km
- Suitable for 09/125µm Singlemode Fiber Cables
- Safe fast-locking mechanism
- 3.3V power supply
- Operating temperature: 0 °C ~ 70 °C
- Mod: Jednomodni
- Priključak: LC
- Udaljenost (km): 20
- Valna duljina: 1310 nm
- DDM podrška: Ne
- Kompatibilnost proizvođača: Univerzalni (MSA), Cisco
- Način emitiranja: Jednosmjerno
- Ethernet brzina: Gigabit

Package contents

- SFP module

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	240	8.50	50.00	29.00	54.50	79.03
Packaging Unit Inside	30	1.06	7.00	20.00	30.00	4.20
Packaging Unit Single	1	0.04	9.00	12.00	3.00	324.00
Net single without Packaging	0	0.00	0.00	0.00	0.00	0.00

More images:

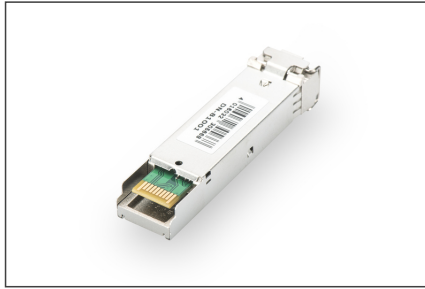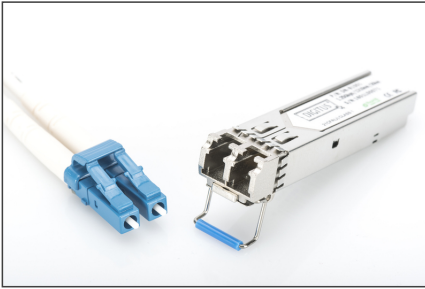

Product Number	EMC Code	Speed	Distance	Connector	Wavelength	Operating Temperature	Industrial Version
Full Duplex							
Dsh-F00	40100000400	10 Gbps	2 km	LC Multimode Duplex	1310nm	0 to 70 °C	
Dsh-F02	40100000700	10 Gbps	200m	LC Singlemode Duplex	750nm/1310nm	0 to 70 °C	
Dsh-F04	40100000700	10 Gbps	200m	LC Singlemode Duplex	750nm/1310nm	0 to 70 °C	
Single							
Dsh-F08	40100000800	10 Gbps	200m	LC Multimode Duplex	850nm	0 to 70 °C	
Dsh-F10	40100000800	10 Gbps	200m	LC Singlemode Duplex	850nm	0 to 70 °C	
Dsh-F06	40100000800	10 Gbps	200m	LC Singlemode Duplex	750nm/1310nm	0 to 70 °C	
Dsh-F02	40100000800	10 Gbps	200m	LC Singlemode Duplex	750nm/1310nm	0 to 70 °C	
Dsh-F02	40100000800	10 Gbps	80 km	LC Singlemode Duplex	1550nm	0 to 70 °C	
RS							
Dsh-R00	40100000100	10 Gbps	200m	LC Multimode Duplex	850nm	0 to 70 °C	
Dsh-R00	40100000100	10 Gbps	10 km	LC Singlemode Duplex	1310nm	0 to 70 °C	
Industrial Version							
Dsh-F12	40100000700	10 Gbps	200m	LC Singlemode Duplex	750nm/1310nm	-40 to 85 °C	✓
Dsh-F14	40100000700	10 Gbps	200m	LC Singlemode Duplex	750nm/1310nm	-40 to 85 °C	✓
Dsh-F08	40100000700	10 Gbps	200m	LC Multimode Duplex	850nm	-40 to 85 °C	✓
Dsh-F10	40100000700	10 Gbps	200m	LC Singlemode Duplex	850nm	-40 to 85 °C	✓
Dsh-F06	40100000700	10 Gbps	200m	LC Singlemode Duplex	750nm/1310nm	-40 to 85 °C	✓
Dsh-F02	40100000700	10 Gbps	200m	LC Singlemode Duplex	750nm/1310nm	-40 to 85 °C	✓
Dsh-F02	40100000700	10 Gbps	80 km	LC Singlemode Duplex	1550nm	-40 to 85 °C	✓
Dsh-F04	40100000700	10 Gbps	200m	LC Singlemode Duplex	750nm/1310nm	-40 to 85 °C	✓
Dsh-F04	40100000700	10 Gbps	200m	LC Singlemode Duplex	750nm/1310nm	-40 to 85 °C	✓