

# DIGITUS Optički multimode prespojni kabel, OM4, LC / LC

DK-2533-03-4  
EAN 4016032308812



## AL 5LCLC-03/4I PATCH KABEL 50um 3,0M-D MM OM4 50/125 æ, 3 m

Optički prespojni kabel, dupleks, LC na LC, MM OM4 50/125 µ, 3 m

**Vrhunska kvaliteta Vaše mreže osigurava oprema izrađena po standardima budućnosti.**



- Dupleks kabel
- LSOH
- Konektor s keramičkom ferulom
- Promjer kabela 2 mm
- Pakiranje 1 komad sa uključenim izvještajem sa ispitivanjem
- Boja: RAL 4003
- Ambalaža: DIGITUS Polybag
- Asortiman: Patch kabeli s optičkim vlaknima

- Broj konektora strane 1: 2
- Broj konektora strane 2: 2
- Kabel u boji: Erikaviolett ljubičasti
- Kabelski omotač: LSOH
- Klasa vlakna: OM4
- Konektor 1: LC
- Konektor 2: LC
- Mod: Višemodni
- Promjer kabela: 2 mm
- Promjer vlakna: 50/125µ
- Stopica: jednobojna
- Vrsta kabela: I-VH 2G50/125µ
- Duljina: 3 m

### Logistics

	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm <sup>3</sup>
Packaging Unit Carton	120	8.00	41.00	41.00	28.00	47.07
Packaging Unit Inside	15	1.00	19.00	19.00	12.00	4.33
Packaging Unit Single	1	0.07	17.00	7.00	1.00	119.00
Net single without Packaging	0	0.07	15.00	15.00	1.00	225.00

### More images:

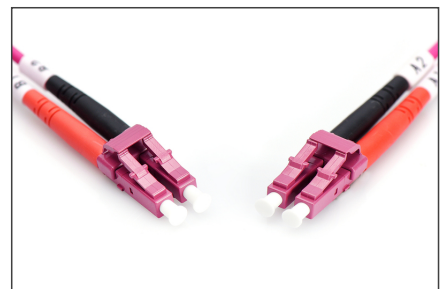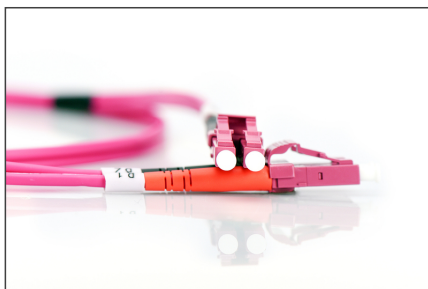

Part No.	DK-2533-03-4			
Lenght	3 m			
Cable Type	Duplex MM 50/125		OM4 LSZH	
	END A		END B	
Connector Type	LC		LC	
Insertion Loss (dB)	0.06	0.09	0.17	0.11
Return Loss (dB)	37.7	30.1	39.5	39.7
Q.C.	PASS			

**Safety notes**

- Avoid direct contact with light sources: Fiber optic cables, especially those with active light sources such as lasers (e.g. in optical communication systems), can emit dangerous radiation that can damage
- eyes. Take care never to look directly into the light of an optical fiber, even if the light source is invisible to the naked eye.
- When working with fiber optic cables, especially during tests or when working with lasers, protective goggles should always be worn to protect against harmful radiation.
- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Do not kink or crush: Fiber optic cables are sensitive to mechanical stress.
- To protect cables from physical damage, they should be laid in special ducts or with protective materials
- Keep cable connectors clean: Fiber optic cables are sensitive to dust and dirt. Even small particles on the connectors can severely impair the signal quality.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
 Auf dem Schüffel 3  
 Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)