


DIGITUS Modularni mikroutikači Kat. 6 za okrugli kabel, Átmenő csatlakozó

AK-219603
EAN 4016032316817

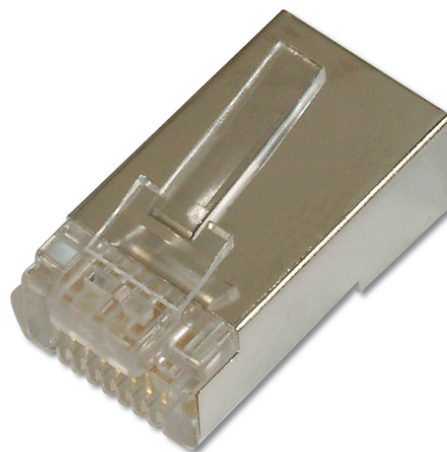

AMO 6 8/8 MIKROKONEKTOR C6-oklopljeno for Round Cable, two-parts plug

Ovi modularni mikroutikači omogućuju brzu i jednostavnu instalaciju.

- Crimping tool – DN-94025 (Multi Modular Crimping Tool Pass through connectors)
- Layout performance: CAT 6, 1GBase-T
- Area of application: Patch cable assembly
- Norms: ISO/IEC 11801 3rd Ed., EN 50173-1, EIA/TIA 568-C
- General properties:
- UL certified

- Technical properties:
- Mating cycles female: > 750 acc. to ISO/IEC 11801, IEC 60603-7-5
- Material connector body: Polycarbonat, clear
- Connector contact: Phosphor bronze, brass 0.6 μ gold-plated
- Flammability: UL 94V-2
- Physical properties:
- Insertion force: ≤ 30 N
- Diameter Cu-Conductor: AWG (27/7 ... 24/7)
- Operating temperature: -40 °C to +80 °C
- Current carrying capacity: 1A -1.5A at 50 °C

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm ³
Packaging Unit Carton	5	11.80	41.00	38.00	21.00	32.72
Packaging Unit Inside	100	0.24	17.00	13.00	3.00	663.00
Packaging Unit Single	1	0.00	2.00	1.00	0.50	1.00
Net single without Packaging	0	0.00	3.00	3.00	1.50	13.50

Safety notes

- Protect product from moisture
- Avoid antistatic charging when installing the product
- Observe the specifications of the raw cable manufacturer during installation

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com