


# DIGITUS Prespojni kabel, Kat. 6 S/FTP

DK-1644-020/B  
EAN 4016032321729

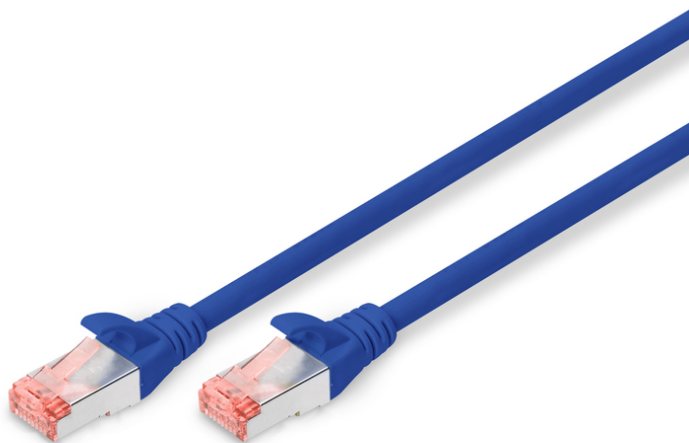

**DK-1644-020/B pres.kabel S/FTP cat.6 2met.plavi CU AWG 27/7, length 2 m, color blue**

Novi DIGITUS® prespojni kabeli vraćaju se na tržište sa unaprijeđenim mikroutikačem. Pregibnica za zaštitnom polugom štiti mikroutikač i kabel od mehaničkog oštećenja. Po boji mikroutikača određuje se kategorija kabela: Plavi mikroutikač za Kat.5e, crveni mikroutikač za Kat.6 i žuti za Kat.6A. U ponudi se nalaze različite boje i dužine kako bi zadovoljili sve zahtjeve klijenata. Za dodatne informacije molimo pogledajte naš katalog s ponudom prespojnih kabela!

**Vrhunsku kvalitetu Vaše mreže osigurava oprema proizvedena sukladno najnovijim standardima.**

- 2x RJ45 (8P8C) mikroutikača
- Pregibnica je opremljena sa zaštitom polugice mikroutikača
- Oznaka dužine na pregibnici




- Vodič: Bakar (Cu)


**Attributes**

- Ambalaža: DIGITUS Polybag
- Konektor 1: Modularni RJ45 (8/8) utikač
- Konektor 2: Modularni RJ45 (8/8) utikač
- Konfiguracija: 1:1
- Kategorija: CAT 6
- Oklop: S-FTP, oklop parova u metalnoj foliji i pletenica
- Duljina: 2 m
- Boja: plavi
- Kapica: LSOH
- Struktura: 4 x 2 AWG 27/7, upletena parica
- Tanka verzija: Ne
- Flat Version: Ne

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm <sup>3</sup>
Packaging Unit Carton	100	8.00	40.00	31.00	30.00	37.20
Packaging Unit Inside	10	0.80	12.00	30.00	36.00	12.96
Packaging Unit Single	1	0.08	1.60	14.00	25.00	560.00
Net single without Packaging	0	0.07	200.00	1.17	1.27	297.18

**More images:**

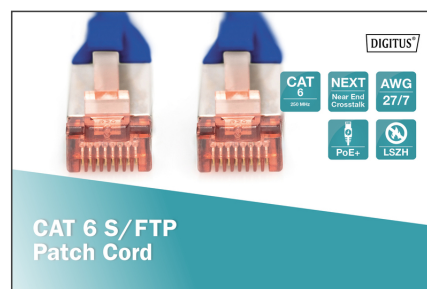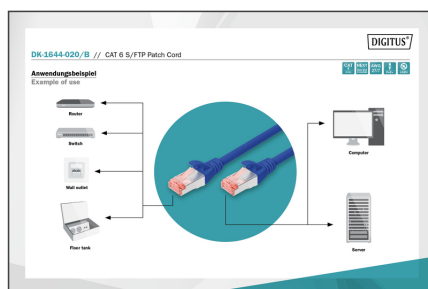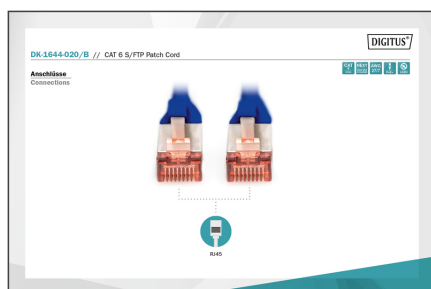

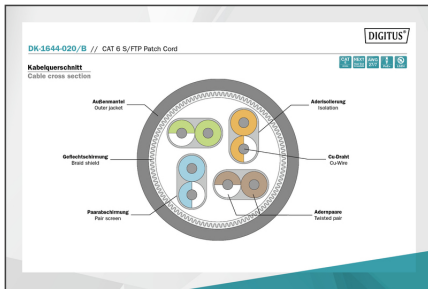

### Safety notes

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Ensure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable.
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

### EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
Auf dem Schüffel 3  
Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)