

DIGITUS mini GBIC (SFP) Module, 10Gbps, 10.0km, with DDM Feature

DN-81201
EAN 4016032324140



10G SFP+ Module, Singlemode, DDM LC Duplex Connector, 1310nm, up to 10km

The DIGITUS® mini GBIC (SFP) transceiver modules offer highest quality and reliability. Whether from switch to switch, converter to switch, converter to converter or any else application: The wide product range of DIGITUS® modules makes possible a flexible usage of the fiber technology. The conformity to the MSA (Multi Source Agreement) standard ensures a compatibility to third party manufacturers.

The plug and play fiber connection

- Mini GBIC SFP (Small Form Factor Pluggable) module
- Compatible with the following manufacturers: Allied Telesis, Allnet, Avaya, CISCO, D-Link, Edimax, FINISAR, FORCE 10, Gigamon, Intellinet, KTI Networks, Level One, PLANET, Tenda, TP-Link, TRENDnet, Mikrotik , ENTERASYS, RIVERSTONE , Unifi, Ubiquiti, ZyXEL, ZTE
- Supports DDM (Digital Diagnostic Monitoring)
- High quality and excellent reliability
- 10 Gbps Maximum Data Rate
- Compliant to IEEE802.3ae 10 Gigabit Standard
- Class 1 laser product compliant with EN 60825-1



- Easy plug-and-play installation
- MSA (Multi Source Agreement) compliant
- Hot pluggable
- Connector: 1x LC Duplex
- Wavelength: 1310nm
- Transmission Power: Minimum -8 dBm, Maximum -0,5 dBm
- Sensitivity Receiving Power: Minimum -12.5 dBm
- For a distance of up to 10,0km
- Safe fast-locking mechanism
- Operating temperature: 0 °C ~ 70 °C
- Mode: Singlemode
- Connector: LC
- Distance (km): 10
- Wavelength: 1310 nm
- DDM Support: yes
- Broadcasting Mode: Unidirectional
- Manufacturer compatibility: Universal (MSA)
- Ethernet speed: 10 Gigabit

Package contents

- SFP module

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	20	2.00	41.00	26.00	16.00	17.06
Packaging Unit Inside	1	0.10	3.00	11.50	9.00	310.50
Packaging Unit Single	1	0.10	3.00	11.50	9.00	310.50
Net single without Packaging	0	0.03	5.50	1.20	0.80	5.28

More images:

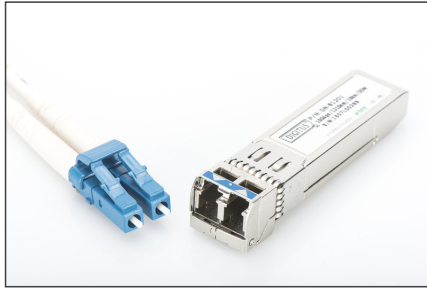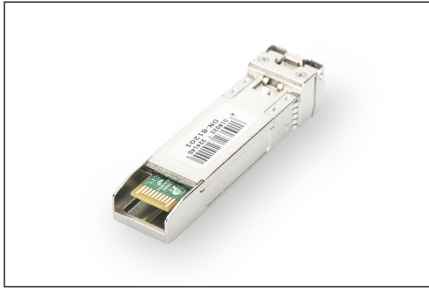

Part Number	Rate	Speed	Distance	Connector	Wavelength	Operating Temperature	Industrial Model
SFP Modules							
Plastic Housing							
Di-4040	40 Gbps	SR	100m	LC	1310nm	0 to 70 °C	✓
Di-4041	40 Gbps	SR	100m	LC	1550nm	0 to 70 °C	✓
Di-4042	40 Gbps	SR	100m	LC	1310nm	0 to 70 °C	✓
Di-4043	40 Gbps	SR	100m	LC	1550nm	0 to 70 °C	✓
Plastic Housing							
Di-4044	40 Gbps	SR	100m	LC	1310nm	0 to 70 °C	✓
Di-4045	40 Gbps	SR	100m	LC	1550nm	0 to 70 °C	✓
Di-4046	40 Gbps	SR	100m	LC	1310nm	0 to 70 °C	✓
Di-4047	40 Gbps	SR	100m	LC	1550nm	0 to 70 °C	✓
Di-4048	40 Gbps	SR	100m	LC	1310nm	0 to 70 °C	✓
Di-4049	40 Gbps	SR	100m	LC	1550nm	0 to 70 °C	✓
Plastic Housing							
Di-4050	40 Gbps	SR	100m	LC	1310nm	0 to 70 °C	✓
Di-4051	40 Gbps	SR	100m	LC	1550nm	0 to 70 °C	✓
Di-4052	40 Gbps	SR	100m	LC	1310nm	0 to 70 °C	✓
Di-4053	40 Gbps	SR	100m	LC	1550nm	0 to 70 °C	✓
Di-4054	40 Gbps	SR	100m	LC	1310nm	0 to 70 °C	✓
Di-4055	40 Gbps	SR	100m	LC	1550nm	0 to 70 °C	✓
Plastic Housing							
Di-4056	40 Gbps	SR	100m	LC	1310nm	0 to 70 °C	✓
Di-4057	40 Gbps	SR	100m	LC	1550nm	0 to 70 °C	✓
Di-4058	40 Gbps	SR	100m	LC	1310nm	0 to 70 °C	✓
Di-4059	40 Gbps	SR	100m	LC	1550nm	0 to 70 °C	✓
Plastic Housing							
Di-4060	40 Gbps	SR	100m	LC	1310nm	0 to 70 °C	✓
Di-4061	40 Gbps	SR	100m	LC	1550nm	0 to 70 °C	✓
Di-4062	40 Gbps	SR	100m	LC	1310nm	0 to 70 °C	✓
Di-4063	40 Gbps	SR	100m	LC	1550nm	0 to 70 °C	✓
Di-4064	40 Gbps	SR	100m	LC	1310nm	0 to 70 °C	✓
Di-4065	40 Gbps	SR	100m	LC	1550nm	0 to 70 °C	✓
Plastic Housing							
Di-4066	40 Gbps	SR	100m	LC	1310nm	0 to 70 °C	✓
Di-4067	40 Gbps	SR	100m	LC	1550nm	0 to 70 °C	✓
Di-4068	40 Gbps	SR	100m	LC	1310nm	0 to 70 °C	✓
Di-4069	40 Gbps	SR	100m	LC	1550nm	0 to 70 °C	✓
Plastic Housing							
Di-4070	40 Gbps	SR	100m	LC	1310nm	0 to 70 °C	✓
Di-4071	40 Gbps	SR	100m	LC	1550nm	0 to 70 °C	✓
Di-4072	40 Gbps	SR	100m	LC	1310nm	0 to 70 °C	✓
Di-4073	40 Gbps	SR	100m	LC	1550nm	0 to 70 °C	✓
Di-4074	40 Gbps	SR	100m	LC	1310nm	0 to 70 °C	✓
Di-4075	40 Gbps	SR	100m	LC	1550nm	0 to 70 °C	✓
Plastic Housing							
Di-4076	40 Gbps	SR	100m	LC	1310nm	0 to 70 °C	✓
Di-4077	40 Gbps	SR	100m	LC	1550nm	0 to 70 °C	✓
Di-4078	40 Gbps	SR	100m	LC	1310nm	0 to 70 °C	✓
Di-4079	40 Gbps	SR	100m	LC	1550nm	0 to 70 °C	✓
Plastic Housing							
Di-4080	40 Gbps	SR	100m	LC	1310nm	0 to 70 °C	✓
Di-4081	40 Gbps	SR	100m	LC	1550nm	0 to 70 °C	✓
Di-4082	40 Gbps	SR	100m	LC	1310nm	0 to 70 °C	✓
Di-4083	40 Gbps	SR	100m	LC	1550nm	0 to 70 °C	✓
Di-4084	40 Gbps	SR	100m	LC	1310nm	0 to 70 °C	✓
Di-4085	40 Gbps	SR	100m	LC	1550nm	0 to 70 °C	✓
Plastic Housing							
Di-4086	40 Gbps	SR	100m	LC	1310nm	0 to 70 °C	✓
Di-4087	40 Gbps	SR	100m	LC	1550nm	0 to 70 °C	✓
Di-4088	40 Gbps	SR	100m	LC	1310nm	0 to 70 °C	✓
Di-4089	40 Gbps	SR	100m	LC	1550nm	0 to 70 °C	✓
Plastic Housing							
Di-4090	40 Gbps	SR	100m	LC	1310nm	0 to 70 °C	✓
Di-4091	40 Gbps	SR	100m	LC	1550nm	0 to 70 °C	✓
Di-4092	40 Gbps	SR	100m	LC	1310nm	0 to 70 °C	✓
Di-4093	40 Gbps	SR	100m	LC	1550nm	0 to 70 °C	✓
Di-4094	40 Gbps	SR	100m	LC	1310nm	0 to 70 °C	✓
Di-4095	40 Gbps	SR	100m	LC	1550nm	0 to 70 °C	✓
Plastic Housing							
Di-4096	40 Gbps	SR	100m	LC	1310nm	0 to 70 °C	✓
Di-4097	40 Gbps	SR	100m	LC	1550nm	0 to 70 °C	✓
Di-4098	40 Gbps	SR	100m	LC	1310nm	0 to 70 °C	✓
Di-4099	40 Gbps	SR	100m	LC	1550nm	0 to 70 °C	✓