


# **DIGITUS RS 232 adapter**

## AK-610518-000-I EAN 4016032325116



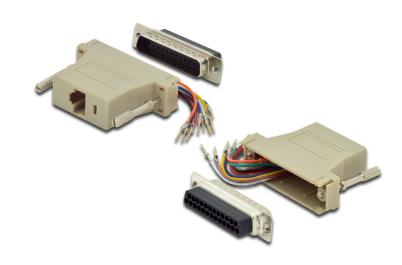

### Adapter, DB25, RJ45, Modular DB25 M, RJ45 F,

RS 232 to RJ45 adapter for self assembling

#### For selfassembling

• DSUB25, plug <=> RJ45, jack

- DSUB, 25-pin, with hex-screws
- PVC housing, color beige

#### Attributes

· Asortiman: Serijski i paralelni adapteri

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	500	12.86	51.00	32.00	31.00	50.59
Packaging Unit Inside	10	0.26	4.00	16.00	16.00	1.02
Packaging Unit Single	1	0.03	2.00	6.00	8.50	102.00
Net single without Packaging	0	0.00	1.50	5.50	8.00	66.00

### More images:





### **Safety notes**

- $\bullet \quad \text{When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.}\\$
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum
  operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.



## EU responsible person

EU based economic operator ensuring the product complies with the required regulations. ASSMANN Electronic GmbH Auf dem Schüffel 3  $\,$ 

Lüdenscheid, Germany https://www.assmann.com info@assmann.com