

# DIGITUS Prespojni kabel Kat.6 S/FTP

DK-1644-A-200  
EAN 4016032327738



**DK-1644-200 pres.kabel S/FTP c6A 20m sivi CU LSOH AWG 26/7, length 20 m, color grey**

DIGITUS® prespojni kabeli Kat. 6A klase EA proizvedeni su i testirani sukladno ISO/IEC 11801 i DIN EN 50173 Kat.6A specifikacijama. Garantiraju sukladnost ugrađenog sustava ožičenja zahtjevima specifikacija ISO & EN kanala i omogućuju optimalne razine performansi DIGITUS® kategorije 6A kabliranja. Performanse su testirane na brzinama do 500 MHz uključujući karakteristike performansi kao što je gubitak preslušavanja na bližem kraju ("NEXT"). DIGITUS® prespojni kabeli dizajnirani su i proizvedeni kako bi u potpunosti zadovoljili uporabu u različitim i najzahtjevnijim aplikacijama. Svaki kabel opremljen je s pregibnicom i zaštitom. Pregibnica je opremljena sa zaštitom polugice mikroutikača. Kategoriju 6A možete vrlo jednostavno prepoznati po mikroutikaču prozirno žute boje.

**Vrhunsku kvalitetu Vaše mreže osigurava oprema proizvedena sukladno najnovijim standardima.**




- 2x RJ45 (8P8C) mikroutikača
- Pregibnica sa zaštitom
- Oznaka dužine na pregibnici
- Vodič: Bakar (Cu)

**Attributes**

- Asortiman: Patch kabeli s upredenim paricama
- Konektor 1: Modularni RJ45 (8/8) utikač
- Konektor 2: Modularni RJ45 (8/8) utikač
- Konfiguracija: 1:1
- Kategorija: CAT 6A
- Oklop: S-FTP, oklop parova u metalnoj foliji i pletenica
- Duljina: 20 m
- Boja: sivi
- Kapica: LSOH
- Struktura: 4 x 2 AWG 26/7, upletena parica
- Tanki verzija: Ne
- Flat Version: Ne

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm <sup>3</sup>
Packaging Unit Carton	20	13.90	33.00	33.00	29.00	31.58
Packaging Unit Inside	5	3.48	22.50	32.00	47.00	33.84
Packaging Unit Single	1	0.70	4.50	23.00	32.00	3.31
Net single without Packaging	0	0.64	2.00	1.17	1.27	2,971.80

**More images:**

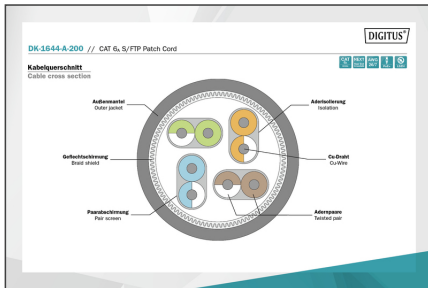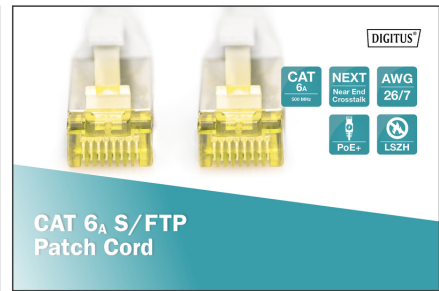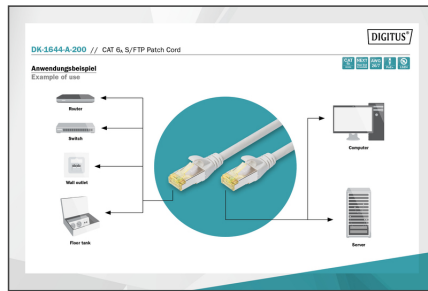

**Safety notes**

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
 Auf dem Schüffel 3  
 Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)