

# DIGITUS Fiber Optic Splice Box, Sliding, 2U

**DN-96200-2U**  
**EAN 4016032359869**



**FO splice box, 2U, 483 mm (19"), empty without front panel, incl. M20/M25 screws, grey**

The robust basic housing is the basic for the assembling of your individual splice boxes. Next of the already existing Splice Boxes from DIGITUS®, you have the possibility to assemble the components by yourself. Additionally we offer an extensive assortment of front panels, couplers and pigtails, which you need to complete your splice boxes. Our products have a continuous quality control and are according to the valued international standards and norms in the fiber optic cabling. With it we guarantee the best performance and quality for your network.

- Unassembled, without front panel

- Punched out base chassis to fix pigtails
- Color: Grey (RAL 7035)
- Holder for splice cassettes
- Punched out ground to fix pigtails
- 4 PG entries and 2 cable entries
- M20/M25 screws and mounting material included in delivery
- Suitable for front panel DN-96201-2U, DN-96201-ST-2U, DN-96204-2U, DN-96206-2U, DN-96207-ST-2U


**Attributes**

- Color: light grey, RAL 7035
- Units: 2

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm <sup>3</sup>
Packaging Unit Carton	5	15.28	55.00	43.00	49.00	115.89
Packaging Unit Inside	1	3.06	26.00	45.00	10.80	12.64
Packaging Unit Single	1	3.06	26.00	45.00	10.80	12.64
Net single without Packaging	0	3.00	24.00	43.00	8.80	9,081.60

**More images:**

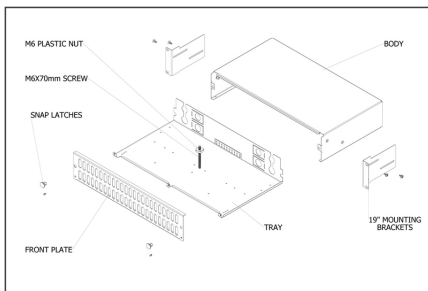

**Safety notes**

- Avoid direct contact with light sources: Fiber optic cables, especially those with active light sources such as lasers (e.g. in optical communication systems), can emit dangerous radiation that can damage
- eyes. Take care never to look directly into the light of an optical fiber, even if the light source is invisible to the naked eye.
- When working with fiber optic cables, especially during tests or when working with lasers, protective goggles should always be worn to protect against harmful radiation.
- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Do not kink or crush: Fiber optic cables are sensitive to mechanical stress.
- To protect cables from physical damage, they should be laid in special ducts or with protective materials
- Keep cable connectors clean: Fiber optic cables are sensitive to dust and dirt. Even small particles on the connectors can severely impair the signal quality.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
Auf dem Schüffel 3  
Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)