

DIGITUS LED rasvjeta ormara

DN-19 LIGHT-3
EAN 4016032361053



DN-19-LIGHT-MAGNET/RASVJETA ORMARA two sensor modi, incl. power adapter

LED rasvjeta ormara je vrlo fleksibilna za uporabu zahvaljujući kompaktnom dizajnu i montaži s magnetima. Može se montirati horizontalno ili vertikalno na Vašem 483 mm (19") ormara te osigurava optimalno osvjetljenje s vrlo učinkovitim LED koje od početka rada daju maksimalno osvjetljenje bez početnog zagrijavanja. Dva različita načina rada (mogu se podesiti sa sklopkom) osiguravaju vrlo jednostavnu uporabu. Automatski način rada automatski će uključiti svjetlo pomoću senzora kada otvorite vrata Vašeg 483 mm (19") ormara i isključit će svjetlo kada se vrata zatvore. Povrh toga možete koristiti i način rada na dodir za ručnu uporabu. U ovom načinu rada za uključivanje svjetla potrebno je jednom mahnuti rukom ispred senzora, a drugi put za isključivanje. S LED rasvjetom isporučuje se i napajanje tako da je uređaj odmah spreman za uporabu.

The perfect light source for the inside of your enclosure. Installable horizontally or vertically via magnets.

- Nominal input voltage: 100-240 V
- Input frequency: 50/60 Hz
- Operating voltage: DC 12 V, 1000 mA
- Performance: 12 W




- Control: IR sensor
- Power adapter plug: CEE 7/16 (Type C) Europlug
- LED DC Input connector: 3.5 mm; 1,5 m length
- Maximum total current draw: 250 mA @ 220-240 V
- Lum. Flux: 223 lm
- Light source: 6500K LED
- Consumption in kWh/1000 h: 0.003 kwh
- Durability in hours: 30000
- Elevation (above MSL) operating storage: 0-3000 m / 0-15 000 m
- Storage-/Operation temperature: -25 °C to +65 °C / -20 °C to +45 °C
- Humidity operating storage: 0-95 % RH Non-condensing 0-95 % RH Non-condensing
- Aluminum housing
- Color: Black plastic & grey aluminum
- CE & ROSH compliant
- Start-up time until 60% of max. luminous flux has been reached: <1 sec.

Package contents

- LED Lighting
- Power adapter
- Magnet strip

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	20	7.00	34.00	32.00	24.00	26.11
Packaging Unit Inside	1	0.35	8.00	30.40	5.00	1.22
Packaging Unit Single	1	0.35	2.80	30.40	1.60	136.19
Net single without Packaging	0	0.25	2.80	30.40	1.60	136.19

More images:

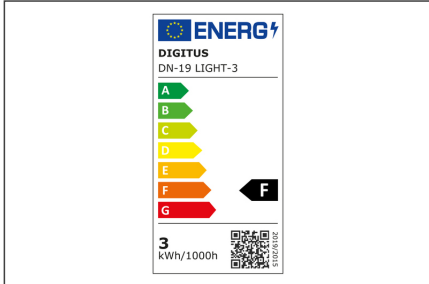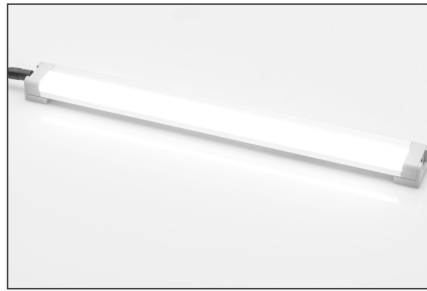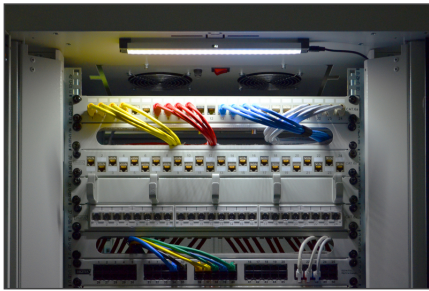

Safety notes

- When installing and using the accessory product for network cabinets, observe the respective safety instructions of the manufacturer or the cabinet system in which you want to use the accessory.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
 Auf dem Schüffel 3
 Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com