


# DIGITUS Cisco-compatible mini GBIC (SFP) Module, 1.25 Gbps, 20km

DN-81001-02  
 EAN 4016032369974

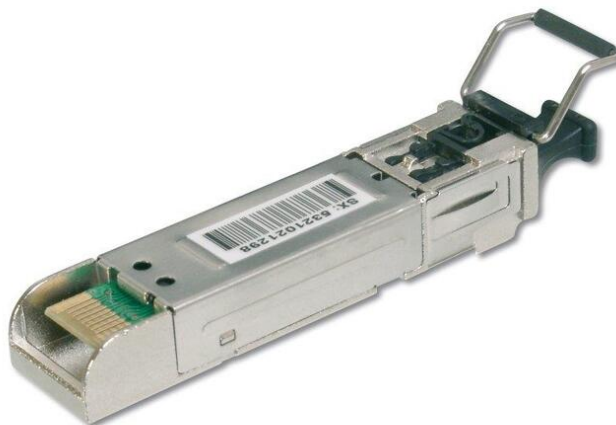

### CISCO-compatible 1.25 Gbps SFP Module, up to 20km Singlemode, LC Duplex Connector,

The DIGITUS® mini GBIC (SFP) transceiver modules offer highest quality and reliability. Whether from switch to switch, converter to switch, converter to converter or any else application: The wide product range of DIGITUS® modules makes possible a flexible usage of the fiber technology. The conformity to the MSA (Multi Source Agreement) standard ensures a compatibility to third party manufacturers.

#### The plug and play fiber connection

- Cisco compatible
- Mini GBIC SFP (Small Form Factor Pluggable) module
- High quality and excellent reliability
- 1.25 Gbps Maximum Data Rate
- Compliant to IEEE 802.3z Gigabit Standard
- Class 1 laser product compliant with EN 60825-1
- Easy plug-and-play installation
- MSA (Multi Source Agreement) compliant
- Hot pluggable

- Connector: 1x LC Duplex
- 1000Base-LX - For Long Haul
- Wavelength: 1310nm
- Transmission power: minimum -8 dBm, maximum -3 dBm
- Sensitivity receiving power: minimum -24 dBm
- For a Distance of up to 20km
- Suitable for 09/125µm Singlemode Fiber Cables
- Safe fast-locking mechanism
- 3.3V power supply
- Operating temperature: 0 °C ~ 70 °C
- Compatible with the following manufacturers: Allied Telesis, Allnet, Avaya, CISCO, D-Link, Edimax, FINISAR, FORCE 10, Gigamon, Intellinet, KTI Networks, Level One, PLANET, Tenda, TP-Link, TRENDnet, Mikrotik, ENTERASYS, RIVERSTONE, Unifi, Ubiquiti, ZyXEL, ZTE
- DDM podřška: Ne

#### Package contents

- SFP module

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm <sup>3</sup>
Packaging Unit Carton	100	5.80	54.50	37.50	21.00	42,918.80
Packaging Unit Inside	1	0.06	11.50	9.50	3.00	327.75
Packaging Unit Single	1	0.06	11.50	9.50	3.00	327.75
Net single without Packaging	0	0.00	0.00	0.00	0.00	0.00